

# Ultra-slim Signal Converter K3FP Series

CSM\_K3FP\_series\_DS\_E\_9\_1

## Complete Lineup of Ultra-slim, High-performance Converters for Every Application



- Ultra-slim 6.2-mm size.  
Close mounting makes devices more compact.
- Easily wired and flexible with 8 terminal blocks.
- Multi-range I/O provides flexibility for the desired signal format.
- High-precision analog conversion with minimum current consumption.
- Reduced wiring through power supply connection with DIN rail bus connector (optional).



## Product Selection


Product	Model	Input signal	Output signal	Power supply voltage	Datasheet available
3-Way Signal Isolator	K3FP-YV-I-I	0 (4) to 20 mA DC	0 (4) to 20 mA DC	24 V DC	Yes
3-Way Signal Isolator	K3FP-YV-U-U	–10 (0) to 10 V DC	–10 (0) to 10 V DC	24 V DC	
3-Way Signal Isolator	K3FP-VS-UI-UI	0 to 20 mA DC, 4 to 20 mA DC, 0 to 10 V DC, 2 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC (selected by DIP switch setting)	0 to 20 mA DC, 4 to 20 mA DC, 0 to 10 V DC, 2 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC (selected by DIP switch setting)	24 V DC	Yes
Dual Output 3-Way Signal Isolator	K3FP-VS-UI-2I	0 to 20 mA DC, 4 to 20 mA DC, 0 to 10 V DC, 1 to 5 V DC (selected by DIP switch setting)	0 to 20 mA DC, 4 to 20 mA DC (selected by DIP switch setting)	24 V DC	Yes
Thermocouple Transducer	K3FP-TS-UI	Type J and K Thermocouples (Conforms to IEC 60584-1) (Input temperature range is selected by DIP switch setting.)	0 to 20 mA DC, 4 to 20 mA DC, 20 to 0 mA DC, 20 to 4 mA DC, 0 to 5 V DC, 1 to 5 V DC, 0 to 10 V DC, 10 to 0 V DC (selected by DIP switch setting)	12 to 24 V DC	Yes
RTD Transducer	K3FP-RS-UI	PT100 Platinum Resistance Thermometer (Conforms to IEC 60751) (Input temperature range is selected by DIP switch setting.)	0 to 20 mA DC, 4 to 20 mA DC, 20 to 0 mA DC, 20 to 4 mA DC, 0 to 5 V DC, 1 to 5 V DC, 0 to 10 V DC, 10 to 0 V DC (selected by DIP switch setting)	24 V DC	Yes

## Applications

### Install in Limited Space

#### K3FP Series


This ultra-slim 6.2-mm Signal Converter can be installed in limited space, such as where expansion is required, and help to reduce the overall size of devices.

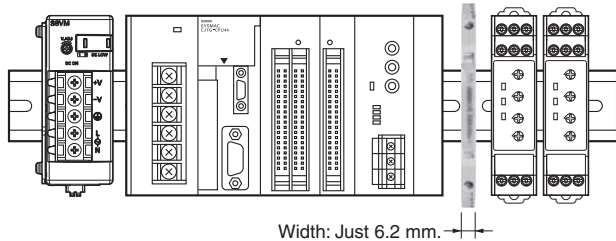

### Reduces Spare Parts

#### K3FP-VS-UI-UI 3-Way Signal Isolator

Input and output ranges are set using a DIP switch on the side of the Unit.

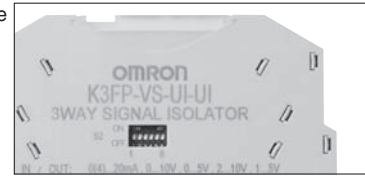


Input signal  
0 to 10 V DC  
2 to 10 V DC  
0 to 5 V DC  
1 to 5 V DC  
0 to 20 mA DC  
4 to 20 mA DC



Output signal  
0 to 10 V DC  
2 to 10 V DC  
0 to 5 V DC  
1 to 5 V DC  
0 to 20 mA DC  
4 to 20 mA DC

### Three- and four-conductor RTD Transducers

#### K3FP-RS-UI RTD Transducer

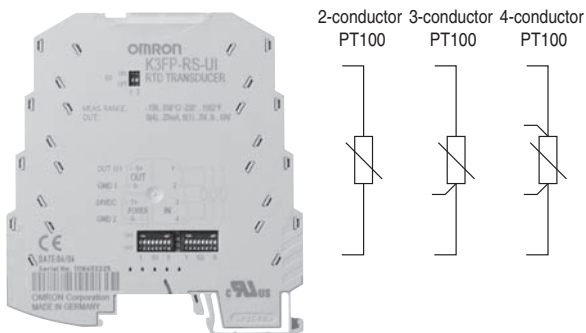


Select the number of conductors for the input platinum resistance thermometer using the DIP switch on the side of the Unit. Set any input range from  $-150^{\circ}\text{C}$  to  $850^{\circ}\text{C}$ .

### Isolated Duplicate Signal Output

#### K3FP-VS-UI-2I Dual Output 3-Way Signal Isolator

Input signal  
0 to 20 mA DC,  
4 to 20 mA DC,  
0 to 10 V DC,  
1 to 5 V DC  
(switch using  
DIP switch)

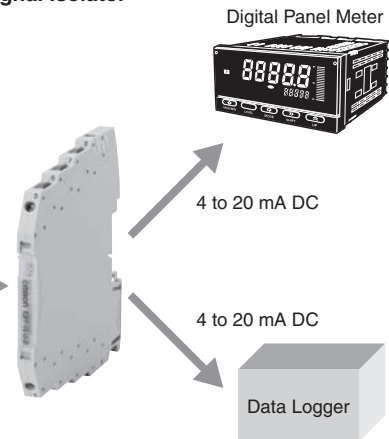

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

## 3-Way Signal Isolator

# K3FP-YV-I-I/K3FP-YV-U-U



### 6.2-mm Ultra-slim Isolator

- Isolates between input, output, and power supply. 1,500 V AC dielectric strength.
- Close mounting.
- CE Marking compliant.
- UL certified.

Refer to *Safety Precautions for the K3FP Series*.



## Ordering Information

### ■ Isolator

Name	Model
DC Current Isolator	K3FP-YV-I-I
DC Voltage Isolator	K3FP-YV-U-U

### ■ Optional Products

Name	Model
DIN rail bus connector	K3FP-1

## Model Number Structure

### DC Current Isolator

#### K3FP-YV-I-I

1 2

1. Model
2. Input or output signal
  - Current input
  - I: 0 (4) to 20 mA DC
  - Current output
  - I: 0 (4) to 20 mA DC


### DC Voltage Isolator

#### K3FP-YV-U-U


1 2

1. Model
2. Input or output signal
  - Voltage input
  - U: -10 (0) to 10 V DC
  - Voltage output
  - U: -10 (0) to 10 V DC

K3FP-YV-I-I

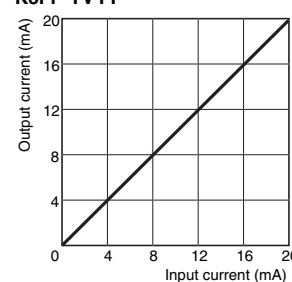

K3FP-YV-U-U

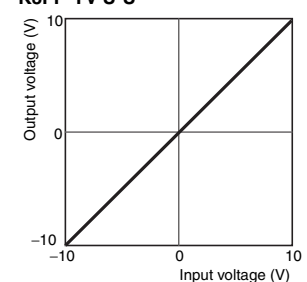

## Ratings and Specifications

### ■ Ratings and Specifications

Item	Model	K3FP-YV-I-I	K3FP-YV-U-U
Supply voltage		24 V DC	
Allowable supply voltage range		80% to 125% of rated supply voltage	
Current consumption		20 mA DC max.	10 mA DC max.
Power consumption		450 mW max.	200 mW max.
Error		±0.1% FS max.	
Temperature coefficient		Maximum: 0.01%/°C max., Typical: 0.002%/°C max. (at 23°C)	
Cut-off frequency		100 Hz	
Response time (10% to 90%)		3.5 ms max.	
Insulation resistance		10 MΩ min. between inputs, outputs, and power supply (at 500 V DC)	
Dielectric strength		1,500 V AC, 50 Hz, 1 min (between inputs, outputs, and power supply)	
Noise resistance		Conforms to IEC 61000	
Ambient operating temperature		-20 to 65°C	
Ambient storage temperature		-40 to 85°C	
Ambient operating humidity		95% max. (with no condensation)	
Ambient storage humidity		95% max. (with no condensation)	
Connection method		Screw connections (M3)	
Tightening torque		0.5 N·m	

Item	Model	K3FP-YV-I-I	K3FP-YV-U-U
Connecting cable	Solid wire	0.14 to 2.5 mm <sup>2</sup>	
	Stranded wire	0.2 to 2.5 mm <sup>2</sup>	
	AWG	24 to 12	
	Wire stripping length	12 mm	
Degree of protection		IP20	
Housing material		PBT	
Weight		55 g	
Safety standards		UL 508	
EMC		EMI: Radiated EMI: EN 55011 EMS: ESD immunity: EN 61000-4-2 Rated electromagnetic field immunity: EN 61000-4-3 Burst immunity: EN 61000-4-4 Surge immunity: EN 61000-4-5 Conducted disturbance immunity: EN 61000-4-6	


## Input Specifications

Item	Input signal	0 (4) to 20 mA DC	–10 (0) to 10 V DC
Input impedance		Approx. 50 Ω	Approx. 100 kΩ
Max. input signal		50 mA	30 V

## Output Specifications

Item	Output signal	0 (4) to 20 mA DC	–10 (0) to 10 V DC
Allowable load impedance		500 Ω max.	10 kΩ min.
Max. output signal		28 mA	12.5 V
Non-load voltage		12.5 V max.	---
Short-circuit current		---	22 mA max.
Ripple		20 mV pp max. (500 Ω)	20 mV pp max.
Span adjustment range		±0.5%	


## Nomenclature

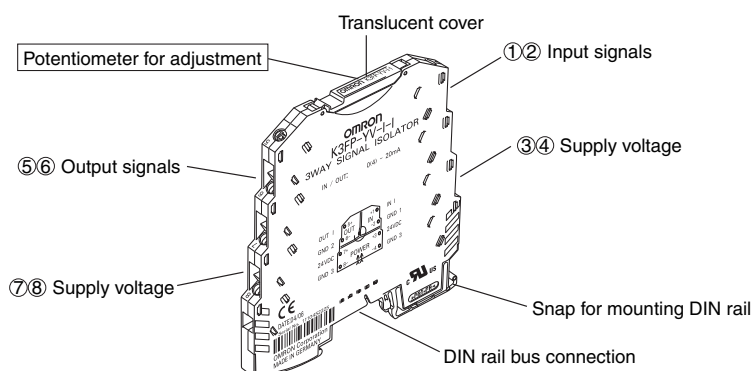

**Note:** The potentiometer is for adjustment at the factory. Do not adjust the potentiometer.

## Connections




### Internal Block Diagram

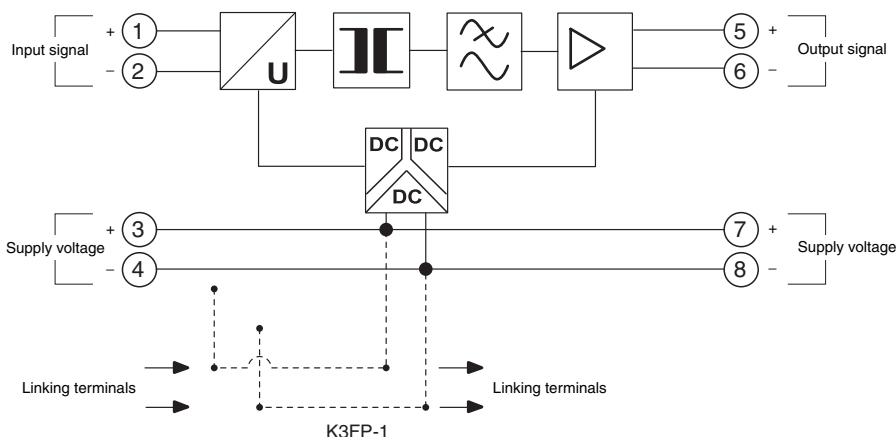

## Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

K3FP-YV-I-I  
K3FP-YV-U-U

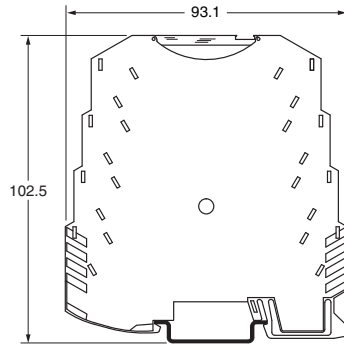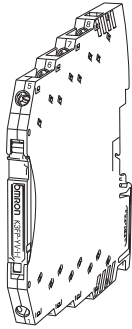

**Note: 1.** Use solid wire with a diameter of 2.5 mm<sup>2</sup> max. or bar terminals with insulation sleeves for terminal connections.

To preserve dielectric strength after connection, the length of the exposed conductive part inserted into the terminal must be 12 mm max.

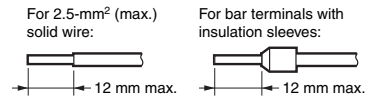

**2. Screw Tightening Torque**  
Recommended torque:  
0.5 N·m

## Safety Precautions

Refer to *Safety Precautions for the K3FP Series*.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.


In the interest of product improvement, specifications are subject to change without notice.

# 3-Way Signal Isolator K3FP-VS-UI-UI



## 6.2-mm Ultra-slim Isolator with 36 Input and Output Combinations.

- Input and output ranges can be easily changed using an external DIP switch.
- Isolates between input, output, and power supply. 1,500 V AC dielectric strength.
- Close mounting.
- CE Marking compliant.
- UL certified.



## Ordering Information

### ■ Isolator

Name	Model
3-Way Signal Isolator	K3FP-VS-UI-UI

### ■ Optional Products

Name	Model
DIN rail bus connector	K3FP-1

## Model Number Structure

### K3FP-VS-UI-UI

1 2 3

#### 1. Model

#### 2. Input signal

UI: 0 to 20 mA DC, 4 to 20 mA DC, 0 to 10 V DC, 2 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC (selected by DIP switch setting)

#### 3. Output signal

UI: 0 to 20 mA DC, 4 to 20 mA DC, 0 to 10 V DC, 2 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC (selected by DIP switch setting)

## Ratings and Specifications

### ■ Ratings and Specifications

Supply voltage		24 V DC
Allowable supply voltage range		80% to 125% of rated supply voltage
Current consumption		20 mA DC max.
Power consumption		450 mW max.
Error		±0.1% FS max.
Temperature coefficient		0.01%/°C max. (at 23°C)
Cut-off frequency		100 Hz
Response time (10% to 90%)		3.5 ms max.
Insulation resistance		10 MΩ min. between inputs, outputs, and power supply (at 500 V DC)
Dielectric strength		1,500 V AC, 50 Hz, 1 min (between inputs, outputs, and power supply)
Noise resistance		Conforms to IEC 61000
Ambient operating temperature		–20 to 65°C
Ambient storage temperature		–40 to 85°C
Ambient operating humidity		95% max. (with no condensation)
Ambient storage humidity		95% max. (with no condensation)
Connection method		Screw connections (M3)
Tightening torque		0.5 N·m
Connecting cable	Solid wire	0.14 to 2.5 mm <sup>2</sup>
	Stranded wire	0.2 to 2.5 mm <sup>2</sup>
	AWG	24 to 12
	Wire stripping length	12 mm
Degree of protection		IP20
Housing material		PBT
Weight		55 g
Safety standards		UL 508

<b>EMC</b>	EMI:	
	Radiated EMI:	EN 55011
	EMS:	
	ESD immunity:	EN 61000-4-2
	Rated electromagnetic field immunity:	EN 61000-4-3
	Burst immunity:	EN 61000-4-4
	Surge immunity:	EN 61000-4-5
	Conducted disturbance immunity:	EN 61000-4-6

## Input Specifications


Input signal	0 to 20 mA DC, 4 to 20 mA DC	0 to 10 V DC, 2 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC
Item		
Input impedance	Approx. 50 $\Omega$	Approx. 100 k $\Omega$
Max. input signal	50 mA	30 V

## Output Specifications

Output signal	0 to 20 mA DC, 4 to 20 mA DC	0 to 10 V DC, 2 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC
Item		
Allowable load impedance	500 $\Omega$ max.	10 k $\Omega$ min.
Max. output signal	28 mA	12.5 V
Non-load voltage	12.5 V max.	---
Short-circuit current	---	22 mA max.
Ripple	20 mV pp max. (500 $\Omega$ )	20 mV pp max.
Span adjustment range	$\pm 0.5\%$	

## Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

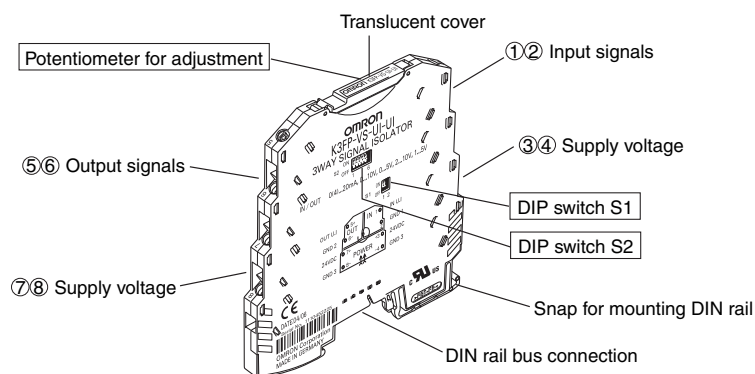


## DIP Switch Settings

All DIP switches are turned OFF at shipment. Set input and output signals using DIP switches S1 and S2.

SWITCH		DIP switch S2						DIP switch S1	
		1	2	3	4	5	6	1	2
Input signal	Output signal								
0 to 10 V	0 to 20 mA	○	○	○	○	○	○	○	○
	4 to 20 mA	○	○	○	○	○	●	○	○
	0 to 10 V	●	○	●	○	○	○	○	○
	2 to 10 V	●	○	●	○	○	●	○	○
	0 to 5 V	●	●	○	○	○	○	○	○
	1 to 5 V	●	●	○	○	○	●	○	○
2 to 10 V	0 to 20 mA	○	○	○	●	●	○	○	○
	4 to 20 mA	○	○	○	○	○	○	○	○
	0 to 10 V	●	○	●	●	●	○	○	○
	2 to 10 V	●	○	●	○	○	○	○	○
	0 to 5 V	●	●	○	●	●	○	○	○
	1 to 5 V	●	●	○	○	○	○	○	○
0 to 5 V	0 to 20 mA	○	○	○	○	○	○	●	○
	4 to 20 mA	○	○	○	○	○	●	●	○
	0 to 10 V	●	○	●	○	○	○	●	○
	2 to 10 V	●	○	●	○	○	●	●	○
	0 to 5 V	●	●	○	○	○	○	●	○
	1 to 5 V	●	●	○	○	○	●	●	○
1 to 5 V	0 to 20 mA	○	○	○	●	●	○	●	○
	4 to 20 mA	○	○	○	○	○	○	●	○
	0 to 10 V	●	○	●	●	●	○	●	○
	2 to 10 V	●	○	●	○	○	○	●	○
	0 to 5 V	●	●	○	●	●	○	●	○
	1 to 5 V	●	●	○	○	○	○	●	○
0 to 20 mA	0 to 20 mA	○	○	○	○	○	○	○	●
	4 to 20 mA	○	○	○	○	○	●	○	●
	0 to 10 V	●	○	●	○	○	○	○	●
	2 to 10 V	●	○	●	○	○	●	○	●
	0 to 5 V	●	●	○	○	○	○	○	●
	1 to 5 V	●	●	○	○	○	●	○	●
4 to 20 mA	0 to 20 mA	○	○	○	●	●	○	○	●
	4 to 20 mA	○	○	○	○	○	○	○	●
	0 to 10 V	●	○	●	●	●	○	○	●
	2 to 10 V	●	○	●	○	○	○	○	●
	0 to 5 V	●	●	○	●	●	○	○	●
	1 to 5 V	●	●	○	○	○	○	○	●

## Connections


### Internal Block Diagram

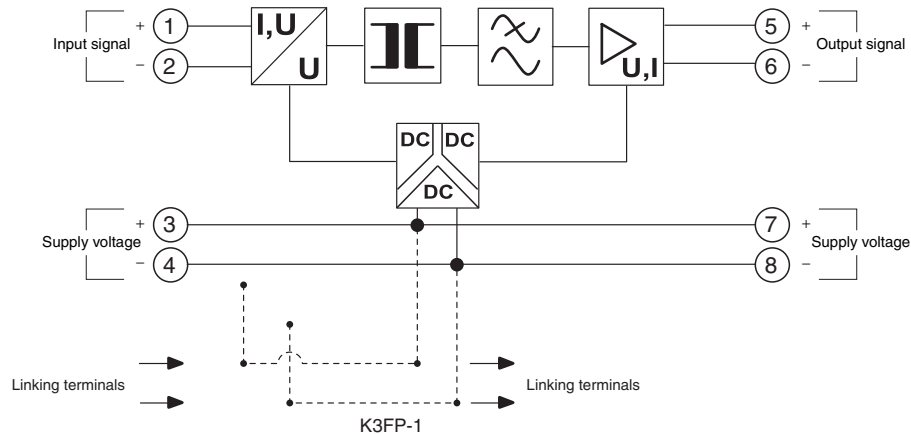

## Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

### K3FP-VS-UI-UI

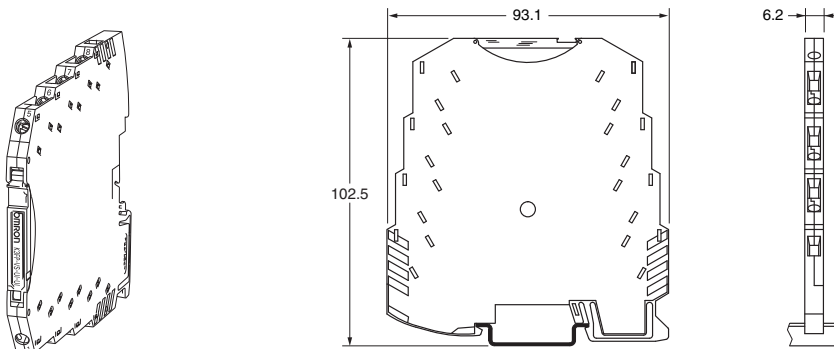

**Note: 1.** Use solid wire with a diameter of 2.5 mm<sup>2</sup> max. or bar terminals with insulation sleeves for terminal connections.

To preserve dielectric strength after connection, the length of the exposed conductive part inserted into the terminal must be 12 mm max.



**2. Screw Tightening Torque**  
Recommended torque:  
0.5 N·m

## Safety Precautions

Refer to *Safety Precautions for the K3FP Series*.

### Precautions for Correct Use

#### Potentiometer

- The potentiometer for adjustment located under the translucent cover can be used to make fine adjustments of analog signals after DIP switch settings have been changed.
- The error when no adjustments have been made is less than 0.4% but if the potentiometer for adjustment is used, the error can be reduced to less than 0.1%.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.


# Dual Output 3-Way Signal Isolator

## K3FP-VS-UI-2I



### 6.2-mm Ultra-slim Dual Output 3-Way Signal Isolator

- Outputs two isolated signals.
- Isolated between input, output 1, output 2, and between power supply. 1,500 V AC dielectric strength.
- Close mounting.
- CE Marking compliant.
- UL certified.

 Refer to *Safety Precautions for the K3FP Series.*



## Ordering Information

### ■ Isolator

Name	Model
Dual Output 3-Way Signal Isolator	K3FP-VS-UI-2I

### ■ Optional Products

Name	Model
DIN rail bus connector	K3FP-1

## Model Number Structure

### K3FP-VS-UI-2I

1      2      3

1. Model
2. Input signal  
UI: 0 to 20 mA DC, 4 to 20 mA DC, 0 to 10 V DC, 1 to 5 V DC (select using DIP switch)
3. Output signal  
2I: 0 to 20 mA DC, 4 to 20 mA DC (select using DIP switch)

## Ratings and Specifications

### ■ Ratings and Specifications

Supply voltage		24 V DC
Allowable supply voltage range		80% to 125% of rated supply voltage
Current consumption		30 mA DC max.
Power consumption		600 mW max.
Error		±0.2% FS max., Typ. ±0.1% FS max.
Temperature coefficient		Maximum: 0.01%/°C max., Typical: 0.004%/°C max. (at 23°C)
Cut-off frequency		35 Hz
Response time (10% to 90%)		10 ms max.
Insulation resistance		10 MΩ min. between inputs, outputs, and power supply (at 500 V DC)
Dielectric strength		1,500 V AC, 50 Hz, 1 min (between inputs, outputs, and power supply)
Noise resistance		Conforms to IEC 61000
Ambient operating temperature		–20 to 65°C
Ambient storage temperature		–40 to 85°C
Ambient operating humidity		95% max. (with no condensation)
Ambient storage humidity		95% max. (with no condensation)
Connection method		Screw connections (M3)
Tightening torque		0.5 N·m
Connecting cable	Solid wire	0.14 to 2.5 mm <sup>2</sup>
	Stranded wire	0.2 to 2.5 mm <sup>2</sup>
	AWG	24 to 12
	Wire stripping length	12 mm
Degree of protection		IP20
Housing material		PBT
Weight		54 g
Safety standards		UL 508

EMC	EMI:	
	Radiated EMI:	EN 55011
	EMS:	
	ESD immunity:	EN 61000-4-2
	Rated electromagnetic field immunity:	EN 61000-4-3
	Burst immunity:	EN 61000-4-4
	Surge immunity:	EN 61000-4-5
	Conducted disturbance immunity:	EN 61000-4-6


Output Specifications

Item	Output signal	0 to 20 mA DC, 4 to 20 mA DC
Allowable load impedance		250 Ω max.
Max. output signal		22 mA
Non-load voltage		---
Short-circuit current		---
Ripple		20 mV pp max. (500 Ω)

Input Specifications

Item	Input signal	0 to 20 mA DC, 4 to 20 mA DC	0 to 10 V DC, 1 to 5 V DC
Input impedance		Approx. 50 Ω	Approx. 100 kΩ
Max. input signal		50 mA	30 V

Nomenclature

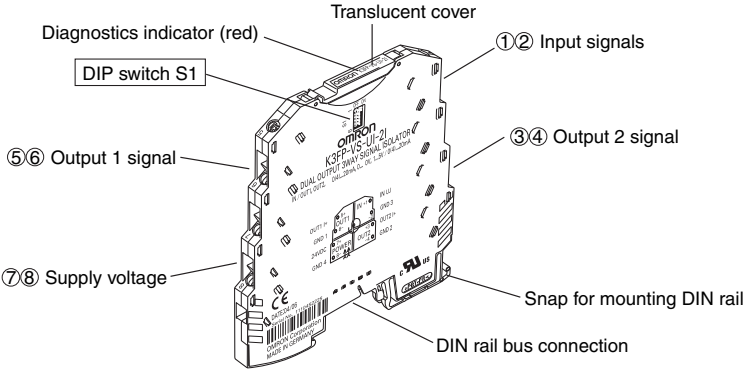

## DIP Switch Settings


All DIP switches are turned OFF at shipment. DIP switch S1 is used to select input and output signals and analog output limit operation.

SWITCH	DIP switch S1					
	1	2	3	4	5	6
	ON ● ↑ OFF ○ ↓					
<b>Input signal</b>						
0 to 10 V	○	○	○			
1 to 5 V	○	●	○			
0 to 20 mA	●	○	●			
4 to 20 mA	●	●	●			
<b>Analog output limit operation</b>						
Limit function disabled				○		
Limit function enabled				●		
<b>Output 1 signal    Output 2 signal</b>						
0 to 20 mA					○	○
0 to 20 mA					●	○
4 to 20 mA					○	●
---					●	●

**Note:** Do not turn ON both pins 5 and 6 at the same time on DIP switch S1.

## Analog Output Operation

### Setting Example for 1 to 5-V Input and 4 to 20-mA Output:

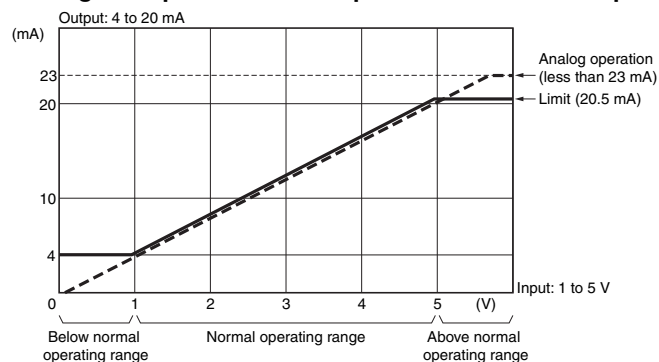


**Note:** The following table shows the output values that are held when the measurement range is exceeded while the limit function is enabled for analog outputs (i.e., pin 4 on DIP switch S1 turned ON).

Output signal selection	Below measurement range	Above measurement range
0 to 20 mA	The output signal is held at 0 mA.	The diagnostics indicator is lit (red) if the analog output is 20.5 mA or higher. The output signal is held at 20.5 mA.
4 to 20 mA	The output signal is held at 4 mA. The diagnostics indicator is lit (red) if the analog output is 3.5 mA or lower.	The diagnostics indicator is lit (red) if the analog output is 20.5 mA or higher. The output signal is held at 20.5 mA.

## Connections


### Internal Block Diagram

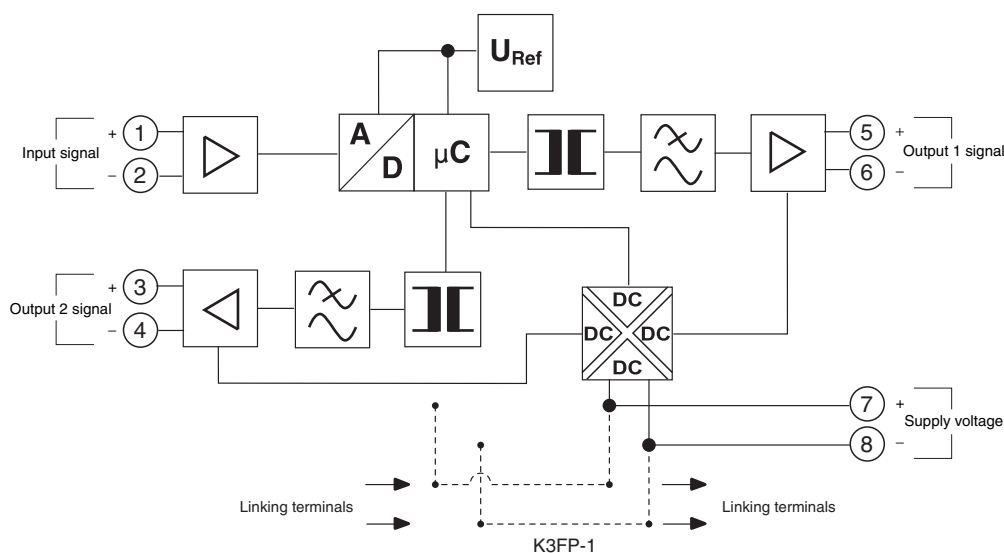


## Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

### K3FP-VS-UI-2I

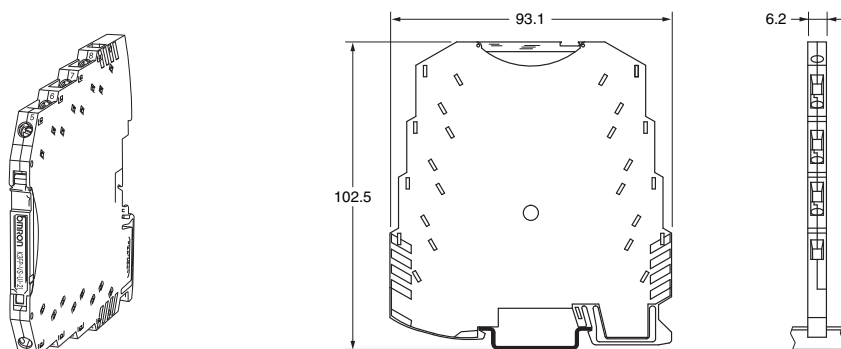

**Note 1.** Use solid wire with a diameter of 2.5 mm<sup>2</sup> max. or bar terminals with insulation sleeves for terminal connections. To preserve dielectric strength after connection, the length of the exposed conductive part inserted into the terminal must be 12 mm max.



**2. Screw Tightening Torque**  
Recommended torque:  
0.5 N·m

## Safety Precautions

Refer to *Safety Precautions for the K3FP Series*.

### ■ Precautions for Correct Use

#### Diagnostics Indicator

The diagnostics indicator (LED) enables easily checking whether the I/O value is within a set range, eliminating the need for a measuring instrument. It lights when the I/O signal exceeds the set range while the limit function is enabled (i.e., while pin 4 on DIP switch S1 is turned ON).

The diagnostics indicator may flicker if the value falls in the following range.

If the setting range is "0 to 10 V" : 0 V  $\pm$ 10 mV, 10 V  $\pm$ 10 mV

If the setting range is "1 to 5 V" : 1 V  $\pm$ 10 mV, 5 V  $\pm$ 10 mV

If the setting range is "0 to 20 mA" : 0 mA  $\pm$ 8  $\mu$ A, 20.5 mA  $\pm$ 8  $\mu$ A

If the setting range is "4 to 20 mA" : 4 mA  $\pm$ 8  $\mu$ A, 20.5 mA  $\pm$ 8  $\mu$ A

This flickering is caused by a slight difference between ON and OFF detection around the diagnostics indicator threshold value and therefore, does not indicate any malfunction.

If this presents any inconveniences to your application, you can disable the limit function.

The diagnostics indicator flashes to indicate parameter memory errors. If this occurs, the Unit must be inspected at the factory.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

# Thermocouple Transducer K3FP-TS-UI



## 6.2-mm Ultra-slim Thermocouple Transducer

- Converts measured values for type J and K thermocouple sensors into analog signals.
- Measurement range can be set between –150 and 1,350°C.
- Isolates between input, output, and power supply. 1,500 V AC dielectric strength.
- Close mounting.
- CE Marking compliant.
- UL certified.

Refer to **Safety Precautions for the K3FP Series.**



## Ordering Information

### ■ Thermocouple Transducer

Name	Model
Thermocouple Transducer	K3FP-TS-UI

### ■ Optional Products

Name	Model
DIN rail bus connector	K3FP-1

## Model Number Structure

### K3FP-TS-UI

1 2

#### 1. Model

Type J and K Thermocouples  
(Conforms to IEC 60584-1)

#### 2. Output signal

UI: 0 to 20 mA DC, 4 to 20 mA DC,  
20 to 0 mA DC, 20 to 4 mA DC,  
0 to 5 V DC, 1 to 5 V DC,  
0 to 10 V DC, 10 to 0 V DC  
(selected by DIP switch setting)

## Ratings and Specifications

### ■ Ratings and Specifications

Supply voltage		12 to 24 V DC
Allowable supply voltage range		80% to 125% of rated supply voltage
Current consumption		Less than 27 mA DC
Power consumption		700 mW max.
Error (See note.)		At maximum measurement span: 0.2% FS max. Within set measurement span: 0.1 × (600 K / set measurement span [K])% FS
Temperature coefficient		0.01%/°C max. (at 23°C)
Cold junction compensation error		3 K
Response time (0% to 99%)		Approx. 400 ms
Insulation resistance		10 MW min. between inputs, outputs, and power supply (at 500 V DC)
Dielectric strength		1,500 V AC, 50 Hz, 1 min (between inputs, outputs, and power supply)
Noise resistance		Conforms to IEC 61000
Ambient operating temperature		–20 to 65°C
Ambient storage temperature		–40 to 85°C
Ambient operating humidity		95% max. (with no condensation)
Ambient storage humidity		95% max. (with no condensation)
Connection method		Screw connections (M3)
Tightening torque		0.5 N·m
Con-necting cable	Solid wire	0.14 to 2.5 mm <sup>2</sup>
	Stranded wire	0.2 to 2.5 mm <sup>2</sup>
	AWG	24 to 12
	Wire stripping length	12 mm
Degree of protection		IP20
Housing material		PBT
Weight		54 g
Safety standards		UL 508
EMC		EMI: Radiated EMI: EN 55011 EMS: ESD immunity: EN 61000-4-2 Rated electromagnetic field immunity: EN 61000-4-3 Burst immunity: EN 61000-4-4 Surge immunity: EN 61000-4-5 Conducted disturbance immunity: EN 61000-4-6

**Note: 1.** Example: Error for a Setting of –30 to 120°C  
 $0.1 \times (600/150) = 0.4\%$ ,  $150^\circ\text{C} \times 0.4\% = 0.6^\circ\text{C}$

\* Here, the "standard error measurement range overall" is for –150°C to 1,350°C.

2. K is the abbreviation for Kelvin, the unit for absolute temperature.

Input Specifications


Item	Input signal	Type J and K Thermocouples (Conforms to IEC 60584-1)
Measurement range	J: -150 to 1,200°C K: -150 to 1,350°C	
Minimum measurement span (See note.)	Min. 50°C	
Max. input signal	30 V	

Note: Set the start and end temperatures using the DIP switch to 50°C or higher.

Output Specifications

Item	Output signal	0 to 20 mA DC, 4 to 20 mA DC, 20 to 0 mA DC, 20 to 4 mA DC	0 to 5 V DC, 1 to 5 V DC, 0 to 10 V DC, 10 to 0 V DC
Allowable load impedance	500 Ω max.	10 kΩ min.	
Max. output signal	24.6 mA	12.3 V	
Non-load voltage	Less than 17.5 V	---	
Short-circuit current	---	10 mA	
Ripple	20 mV pp max. (500 Ω)	20 mV pp max.	
Operation during sensor faults	0% to 105%		

Nomenclature

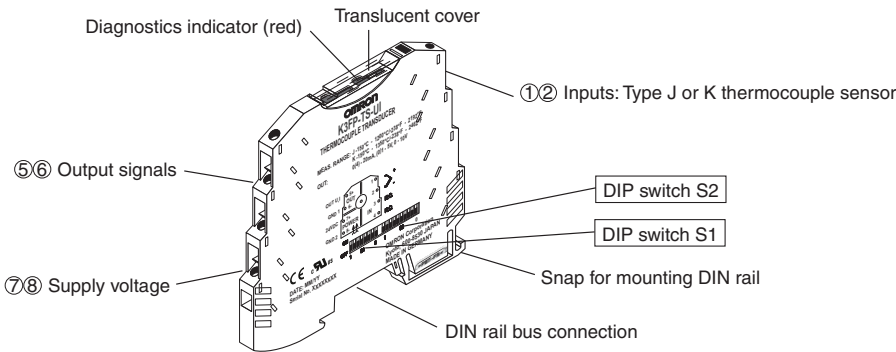

DIP Switch Settings

All DIP switches are turned OFF at shipment.

DIP Switch S1

DIP switch S1 is used to set the thermocouple type, cold junction compensation enable/disable, output signal range, and the start of the measurement range.

SWITCH		DIP switch S1							
ON ● OFF ○		1	2	3	4	5	6	7	8
Thermocouple type									
Type J	○								
Type K	●								
Cold junction compensation enable/disable									
Enabled	●								
Disabled	○								
Output signal range									
0 to 20 mA				○	○	○			
20 to 0 mA				●	○	○			
4 to 20 mA				○	●	○			
20 to 4 mA				●	●	○			
0 to 10 V				○	○	●			
10 to 0 V				●	○	●			
0 to 5 V				○	●	●			
1 to 5 V				●	●	●			
Start temperature									
[°C]	[°F]								
0	32						○	○	○
-10	14						●	○	○
-20	-4						○	●	○
-30	-22						●	●	○
-40	-40						○	○	●
-50	-58						●	○	●
-100	-148						○	●	●
-150	-238						●	●	●

## DIP Switch S2

DIP switch S2 is used to select the measurement range end value and output status for errors.

SWITCH		DIP switch S2									
		1	2	3	4	5	6	7	8	9	0
ON ● OFF ○		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
End temperature											
[°C]	[°F]										
0	32	○	○	○	○	○	○				
10	50	●	○	○	○	○	○				
20	68	○	●	○	○	○	○				
30	86	●	●	○	○	○	○				
40	104	○	○	●	○	○	○				
50	122	●	○	●	○	○	○				
60	140	○	●	●	○	○	○				
70	158	●	●	●	○	○	○				
80	176	○	○	○	●	○	○				
90	194	●	○	○	●	○	○				
100	212	○	●	○	●	○	○				
110	230	●	●	○	●	○	○				
120	248	○	○	●	●	○	○				
130	266	●	○	●	●	○	○				
140	284	○	●	●	●	○	○				
150	302	●	●	●	●	○	○				
160	320	○	○	○	○	●	○				
170	338	●	○	○	○	●	○				
180	356	○	●	○	○	●	○				
190	374	●	●	○	○	●	○				
200	392	○	○	●	○	●	○				
210	410	●	○	●	○	●	○				
220	428	○	●	●	○	●	○				
230	446	●	●	●	○	●	○				
240	464	○	○	○	●	●	○				
250	482	●	○	○	●	●	○				
260	500	○	●	○	●	●	○				
270	518	●	●	○	●	●	○				
280	536	○	○	●	●	●	○				
290	554	●	○	●	●	●	○				
300	572	○	●	●	●	●	○				
320	608	●	●	●	●	●	○				
Output status for errors											
A								○	○	○	
B								●	○	○	
C								○	●	○	
D								●	●	○	
E								○	○	●	
F								●	○	●	
G								○	●	●	
H								●	●	●	

\* Type J supports up to 1,200°C and type K supports up to 1,350°C.  
**Note:** Pin 0 on DIP switch S2 can be turned either ON or OFF.

SWITCH		DIP switch S2									
		1	2	3	4	5	6	7	8	9	0
ON ● OFF ○		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
End temperature											
[°C]	[°F]										
340	644	○	○	○	○	○	●				
360	680	●	○	○	○	○	●				
380	716	○	●	○	○	○	●				
400	752	●	●	○	○	○	●				
420	788	○	○	●	○	○	●				
440	824	●	○	●	○	○	●				
460	860	○	●	●	○	○	●				
480	896	●	●	●	○	○	●				
500	932	○	○	○	●	○	●				
520	968	●	○	○	●	○	●				
540	1004	○	●	○	●	○	●				
560	1040	●	●	○	●	○	●				
580	1076	○	○	●	●	○	●				
600	1112	●	○	●	●	○	●				
620	1148	○	●	●	●	○	●				
640	1184	●	●	●	●	○	●				
660	1220	○	○	○	○	●	●				
680	1256	●	○	○	○	●	●				
700	1292	○	●	○	○	○	●				
750	1382	●	●	○	○	○	●				
800	1472	○	○	●	○	○	●				
850	1562	●	○	●	○	○	●				
900	1652	○	●	●	○	○	●				
950	1742	●	●	●	○	○	●				
1000	1832	○	○	○	○	○	●				
1050	1922	●	○	○	○	○	●				
1100	2012	○	●	○	○	○	●				
1150	2102	●	●	○	○	○	●				
1200	2192	○	○	●	○	○	●				
1250 *	2282	○	○	●	○	○	●				
1300 *	2372	○	○	●	○	○	●				
1350 *	2462	●	○	○	○	○	●				
Output status for errors											
A								○	○	○	
B								●	○	○	
C								○	●	○	
D								●	●	○	
E								○	○	●	
F								●	○	●	
G								○	●	●	
H								●	●	●	

## Output Status for Errors

SWITCH	DIP switch S2			When disconnected on thermocouple side	Above measurement range	Below measurement range
	7	8	9			
ON ● OFF ○	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
Output status for errors	7	8	9			
A	○	○	○	Held at 5% of maximum rated output.	Held at 2.5% of maximum rated output.	Held at minimum rated output.
B	●	○	○	Held at 5% of maximum rated output.	Held at 2.5% of maximum rated output.	Held at -12.5% of minimum rated output.
C	○	●	○	Held at 5% of maximum rated output.	Held at maximum rated output.	Held at minimum rated output.
D	●	●	○	Held at minimum rated output.	Held at maximum rated output.	Held at minimum rated output.
E (See note.)	○	○	●	21.5 mA		
F (See note.)	●	○	●	3.5 mA		
G (See note.)	○	●	●	0 mA		
H (See note.)	●	●	●	3.5 mA	21.5 mA	

**Note:** Used at 4 to 20 mA output or 20 to 4 mA output only.

## Relationship between Output Signal Range Selection

### Output Signal Ranges 0 to 20 mA or 20 to 0 mA

Output status for errors	DIP switch S2			When disconnected on thermocouple side	Above measurement range	Below measurement range
	7	8	9			
A	○	○	○	21 mA	20.5 mA	0 mA
B	●	○	○	21 mA	20.5 mA	0 mA
C	○	●	○	21 mA	20 mA	0 mA
D	●	●	○	0 mA	20 mA	0 mA

### Output Signal Ranges 4 to 20 mA or 20 to 4 mA

Output status for errors	DIP switch S2			When disconnected on thermocouple side	Above measurement range	Below measurement range
	7	8	9			
A	○	○	○	21 mA	20.5 mA	4 mA
B	●	○	○	21 mA	20.5 mA	3.5 mA
C	○	●	○	21 mA	20 mA	4 mA
D	●	●	○	4 mA	20 mA	4 mA
E	○	○	●	21.5 mA		
F	●	○	●	3.5 mA		
G	○	●	●	0 mA		
H	●	●	●	3.5 mA	21.5 mA	

### Output Signal Ranges 0 to 10 V or 10 to 0 V

Output status for errors	DIP switch S2			When disconnected on thermocouple side	Above measurement range	Below measurement range
	7	8	9			
A	○	○	○	10.5 V	10.25 V	0 V
B	●	○	○	10.5 V	10.25 V	0 V
C	○	●	○	10.5 V	10 V	0 V
D	●	●	○	0 V	10 V	0 V

### Output Signal Range 0 to 5 V


Output status for errors	DIP switch S2			When disconnected on thermocouple side	Above measurement range	Below measurement range
	7	8	9			
A	○	○	○	5.25 V	5.125 V	0 V
B	●	○	○	5.25 V	5.125 V	0 V
C	○	●	○	5.25 V	5 V	0 V
D	●	●	○	0 V	5 V	0 V

### Output Signal Range 1 to 5 V

Output status for errors	DIP switch S2			When disconnected on thermocouple side	Above measurement range	Below measurement range
	7	8	9			
A	○	○	○	5.25 V	5.125 V	1 V
B	●	○	○	5.25 V	5.125 V	0.875 V
C	○	●	○	5.25 V	5 V	1 V
D	●	●	○	1 V	5 V	1 V




# Connections

## Internal Block Diagram

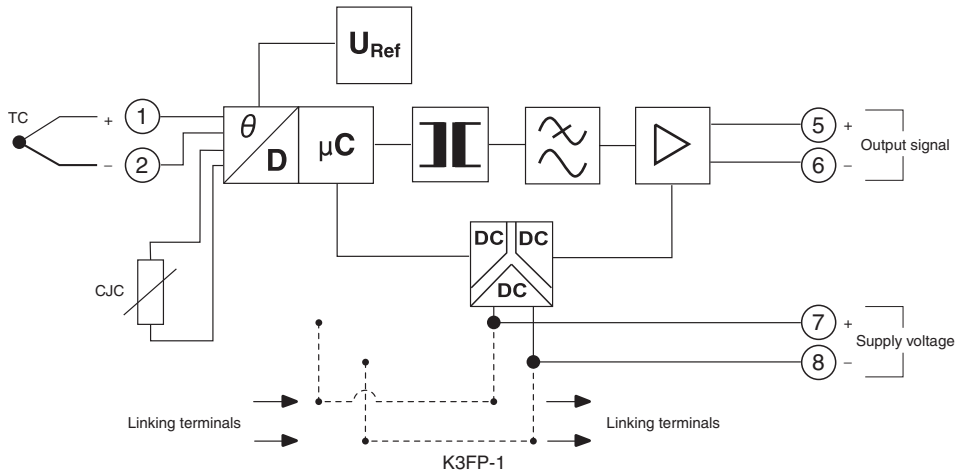


# Dimensions

**Note:** All units are in millimeters unless otherwise indicated.  
**K3FP-TS-UI**

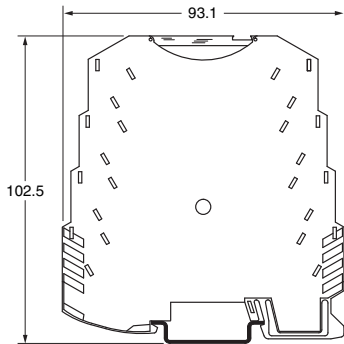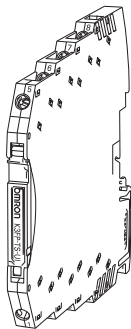

**Note: 1.** Use solid wire with a diameter of 2.5 mm<sup>2</sup> max. or bar terminals with insulation sleeves for terminal connections. To preserve dielectric strength after connection, the length of the exposed conductive part inserted into the terminal must be 12 mm max.



**2.** Screw Tightening Torque  
Recommended torque:  
0.5 N·m

# Safety Precautions

Refer to *Safety Precautions for the K3FP Series*.

## Precautions for Correct Use

### Diagnostics Indicator

The diagnostics indicator (LED) inside the translucent cover shows the error status, as outlined in the following table.

Indicator status	Error details
Flashing	The temperature measurement range is set to less than 50°C.
	A value exceeding 1200°C is set as the end temperature when a type J thermocouple is selected.
	The output status at error is set to E, F, G, or H when an output signal range other than 4 to 20 mA or 20 to 4 mA is selected.
	The thermocouple is disconnected.
	The measured temperature exceeds the upper/lower limit.
Lit	An internal malfunction has occurred.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

# RTD Transducer K3FP-RS-UI



## 6.2-mm Ultra-slim RTD Transducer

- Converts measured values from PT100 platinum resistance thermometers into analog signals.
- A 2-conductor, 3-conductor, or 4-conductor PT100 platinum resistance thermometer can be connected to the input terminal.
- Measurement range can be set between –150 and 850°C.
- Isolates between input, output, and power supply. 1,500 V AC dielectric strength.
- Close mounting.
- CE Marking compliant.
- UL certified.

Refer to **Safety Precautions for the K3FP Series.**

## Ordering Information

### RTD Transducer

Name	Model
RTD Transducer	K3FP-RS-UI

### Optional Products

Name	Model
DIN rail bus connector	K3FP-1

## Model Number Structure

### K3FP-RS-UI

1 2

#### 1. Model

PT100 platinum resistance thermometer (conforms to IEC 60751)  
(selected by DIP switch setting)

#### 2. Output Signal

UI: 0 to 20 mA DC, 4 to 20 mA DC,  
20 to 0 mA DC, 20 to 4 mA DC,  
0 to 5 V DC, 1 to 5 V DC,  
0 to 10 V DC, 10 to 0 V DC  
(selected by DIP switch setting)



## Ratings and Specifications

### Ratings and Specifications

Supply voltage		24 VDC
Allowable supply voltage range		80% to 125% of rated supply voltage
Current consumption		25 mA DC max. (at 24 V DC)
Power consumption		500 mW max.
Error (See note.)		Within set measurement range: ((100 K/set measurement range [K]) + 0.1)% (Standard error measurement range overall: ±0.2% FS max.)
Temperature coefficient		Max. 0.02%/°C max. (at 23°)
Response time (0% to 99%)		160 ms max.
Insulation resistance		10 MW min. between inputs, outputs, and power supply (at 500 V DC)
Dielectric strength		1,500 V AC, 50 Hz, 1 min (between inputs, outputs, and power supply)
Noise resistance		Conforms to IEC 61000
Ambient operating temperature		–20 to 65°C
Ambient storage temperature		–40 to 85°C
Ambient operating humidity		95% max. (with no condensation)
Ambient storage humidity		95% max. (with no condensation)
Connection method		Screw connections (M3)
Tightening torque		0.5 N·m
Con-necting cable	Solid wire	0.14 to 2.5 mm²
	Stranded wire	0.2 to 2.5 mm²
	AWG	24 to 12
	Wire stripping length	12 mm
Degree of protection		IP20
Housing material		PBT
Weight		54 g
Safety standards		UL 508
EMC		EMI: Radiated EMI: EN 55011 EMS: ESD immunity: EN 61000-4-2 Rated electromagnetic field immunity: EN 61000-4-3 Burst immunity: EN 61000-4-4 Surge immunity: EN 61000-4-5 Conducted disturbance immunity: EN 61000-4-6

**Note:** Example: Error for a Setting of –30 to 100°C  
(100/130) + 0.1 = 0.76 + 0.1 = 0.869%, 130°C × 0.87% = 1.13°C

\* Here, the "standard error measurement range overall" is for –150°C to 850°C.

## Input Specifications


Item	Input signal	PT100 platinum resistance thermometer (conforms to IEC 60751)
Measurement range		-150 to 850°C
Min. measurement span		Min. 50°C
Max. input signal		30 V
Connection method		2-conductor, 3-conductor, or 4-conductor
Sensor input current		1 mA
Max. permissible conductor resistance		10 $\Omega$ per conductor

**Note:** Set the start and end temperatures using the DIP switch to 50°C or higher.

## Output Specifications

Item	Output signal	0 to 20 mA DC, 4 to 20 mA DC, 20 to 0 mA DC, 20 to 4 mA DC	0 to 5 V DC, 1 to 5 V DC, 0 to 10 V DC, 10 to 0 V DC
Allowable load impedance		500 $\Omega$ max. (20 mA)	10 k $\Omega$ min.
Max. output signal		23 mA	12.5 V
Non-load voltage		12.5 V max.	---
Short-circuit current		---	10 mA max.
Ripple		20 mVpp max. (500 $\Omega$ )	20 mVpp max.
Operation during sensor faults		0% to 105%	

## Nomenclature

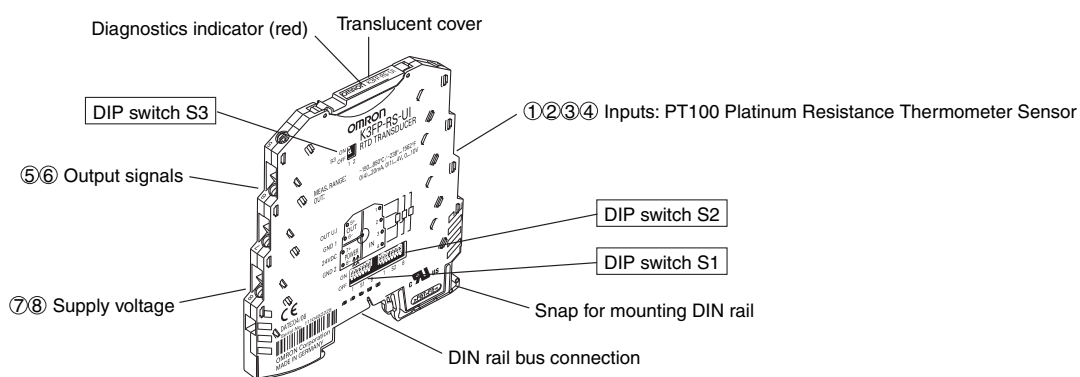

## DIP Switch Settings

All DIP switches are turned OFF at shipment.

### DIP Switch S1

DIP switch S1 is used to set the connection method, output signal range, and measurement range start value.

SWITCH		DIP switch S1							
ON ● ↑ OFF ○ ↓		1	2	3	4	5	6	7	8
Connection method									
2-conductor		○	○						
2-conductor		●	○						
3-conductor		○	●						
4-conductor		●	●						
Output signal range									
0 to 20 mA				○	○	○			
20 to 0 mA				●	○	○			
4 to 20 mA				○	●	○			
20 to 4 mA				●	●	○			
0 to 10 V				○	○	●			
10 to 0 V				●	○	●			
0 to 5 V				○	●	●			
1 to 5 V				●	●	●			
Start temperature									
[°C]	[°F]								
0	32						○	○	○
-10	14						●	○	○
-20	-4						○	●	○
-30	-22						●	●	○
-40	-40						○	○	●
-50	-58						●	○	●
-100	-148						○	●	●
-150	-238						●	●	●

### DIP Switch S3

DIP switch S3 is used to select current and voltage outputs for output signals.

SWITCH		DIP switch S3	
ON ● ↑ OFF ○ ↓		1	2
Output signal			
0 to 20 mA			
20 to 0 mA		●	○
4 to 20 mA			
20 to 4 mA			
0 to 10 V			
10 to 0 V		○	●
0 to 5 V			
1 to 5 V			



## DIP Switch S2

DIP switch S2 is used to select the measurement range end value and output status for errors.

SWITCH		DIP Switch S2							
		1	2	3	4	5	6	7	8
ON ● OFF ○		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
End temperature									
°C	°F								
0	32	○	○	○	○	○	○		
5	41	●	○	○	○	○	○		
10	50	○	●	○	○	○	○		
15	59	●	●	○	○	○	○		
20	68	○	○	●	○	○	○		
25	77	●	○	●	○	○	○		
30	86	○	●	●	○	○	○		
35	95	●	●	●	○	○	○		
40	104	○	○	○	●	○	○		
45	113	●	○	○	●	○	○		
50	122	○	●	○	●	○	○		
55	131	●	●	○	●	○	○		
60	140	○	○	●	●	○	○		
65	149	●	○	●	●	○	○		
70	158	○	●	●	●	○	○		
75	167	●	●	●	●	○	○		
80	176	○	○	○	○	●	○		
85	185	●	○	○	○	●	○		
90	194	○	●	○	○	●	○		
95	203	●	●	○	○	●	○		
100	212	○	○	●	○	●	○		
110	230	●	○	●	○	●	○		
120	248	○	●	●	○	●	○		
130	266	●	●	●	○	●	○		
140	284	○	○	○	●	●	○		
150	302	●	○	○	●	●	○		
160	320	○	●	○	●	●	○		
170	338	●	●	○	●	●	○		
180	356	○	○	●	●	●	○		
190	374	●	○	●	●	●	○		
200	392	○	●	●	●	●	○		
210	410	●	●	●	●	●	○		
Output status for errors									
A								○	○
B								●	○
C								○	●
D								●	●

SWITCH		DIP Switch S2							
		1	2	3	4	5	6	7	8
ON ● OFF ○		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
End temperature									
°C	°F								
220	428	○	○	○	○	○	●		
230	446	●	○	○	○	○	●		
240	464	○	●	○	○	○	●		
250	482	●	●	○	○	○	●		
260	500	○	○	●	○	○	●		
270	518	●	○	●	○	○	●		
280	536	○	●	●	○	○	●		
290	554	●	●	●	○	○	●		
300	572	○	○	○	●	○	●		
320	608	●	○	○	●	○	●		
340	644	○	●	○	●	○	●		
360	680	●	●	○	●	○	●		
380	716	○	○	●	●	○	●		
400	752	●	○	●	●	○	●		
420	788	○	●	●	●	○	●		
440	824	●	●	●	●	○	●		
460	860	○	○	○	○	●	●		
480	896	●	○	○	○	●	●		
500	932	○	●	○	○	●	●		
520	968	●	●	○	○	●	●		
540	1004	○	○	●	○	●	●		
560	1040	●	○	●	○	●	●		
580	1076	○	●	●	○	●	●		
600	1112	●	●	●	○	●	●		
620	1148	○	○	○	●	●	●		
640	1184	●	○	○	●	●	●		
660	1220	○	●	○	●	●	●		
680	1256	●	●	○	●	●	●		
700	1292	○	○	●	●	●	●		
750	1382	●	○	●	●	●	●		
800	1472	○	●	●	●	●	●		
850	1562	●	●	●	●	●	●		
Output status for errors									
A								○	○
B								●	○
C								○	●
D								●	●

## Output Status for Errors

SWITCH	DIP switch S2		When disconnected on platinum resistance thermometer side	Above measurement range	Below measurement range	When short-circuited on platinum resistance thermometer side
	7	8				
ON ● ↑ OFF ○ ↓						
Output status for errors						
A	○	○	Held at 5% of maximum rated output.	Held at 2.5% of maximum rated output.	Held at minimum rated output.	Held at minimum rated output.
B	●	○	Held at 5% of maximum rated output.	Held at 2.5% of maximum rated output.	Held at –12.5% of minimum rated output.	Held at –25% of minimum rated output.
C	○	●	Held at 5% of maximum rated output.	Held at maximum rated output.	Held at minimum rated output.	Held at 5% of maximum rated output.
D	●	●	Held at minimum rated output.	Held at maximum rated output.	Held at minimum rated output.	Held at minimum rated output.

## Relationship between Output Signal Range Selection and Output Status for Errors

### Output Signal Ranges 0 to 20 mA or 20 to 0 mA

Output status for errors	DIP switch S2		When disconnected on platinum resistance thermometer side	Above measurement range	Below measurement range	When short-circuited on platinum resistance thermometer side
	7	8				
A	○	○	21 mA	20.5 mA	0 mA	0 mA
B	●	○	21 mA	20.5 mA	0 mA	0 mA
C	○	●	21 mA	20 mA	0 mA	21 mA
D	●	●	0 mA	20 mA	0 mA	0 mA

### Output Signal Ranges 4 to 20 mA or 20 to 4 mA

Output status for errors	DIP switch S2		When disconnected on platinum resistance thermometer side	Above measurement range	Below measurement range	When short-circuited on platinum resistance thermometer side
	7	8				
A	○	○	21 mA	20.5 mA	4 mA	4 mA
B	●	○	21 mA	20.5 mA	3.5 mA	3mA
C	○	●	21 mA	20 mA	4 mA	21 mA
D	●	●	4 mA	20 mA	4 mA	4 mA

### Output Signal Ranges 0 to 10 V or 10 to 0 V

Output status for errors	DIP switch S2		When disconnected on platinum resistance thermometer side	Above measurement range	Below measurement range	When short-circuited on platinum resistance thermometer side
	7	8				
A	○	○	10.5 V	10.25 V	0 V	0 V
B	●	○	10.5 V	10.25 V	0 V	0 V
C	○	●	10.5 V	10 V	0 V	10.5 V
D	●	●	0 V	10 V	0 V	0 V

### Output Signal Range 0 to 5 V


Output status for errors	DIP switch S2		When disconnected on platinum resistance thermometer side	Above measurement range	Below measurement range	When short-circuited on platinum resistance thermometer side
	7	8				
A	○	○	5.25 V	5.125 V	0 V	0 V
B	●	○	5.25 V	5.125 V	0 V	0 V
C	○	●	5.25 V	5 V	0 V	5.25 V
D	●	●	0 V	5 V	0 V	0 V

### Output Signal Range 1 to 5 V

Output status for errors	DIP switch S2		When disconnected on platinum resistance thermometer side	Above measurement range	Below measurement range	When short-circuited on platinum resistance thermometer side
	7	8				
A	○	○	5.25 V	5.125 V	1 V	1 V
B	●	○	5.25 V	5.125 V	0.875 V	0.75 V
C	○	●	5.25 V	5 V	1 V	5.25 V
D	●	●	1 V	5 V	1 V	1 V

## Connections



### Internal Block Diagram

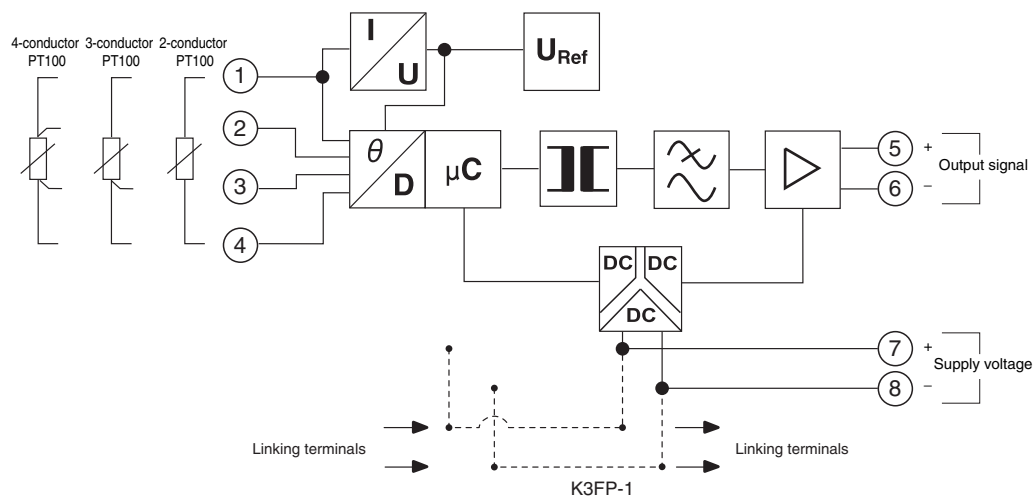


## Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

### K3FP-RS-UI

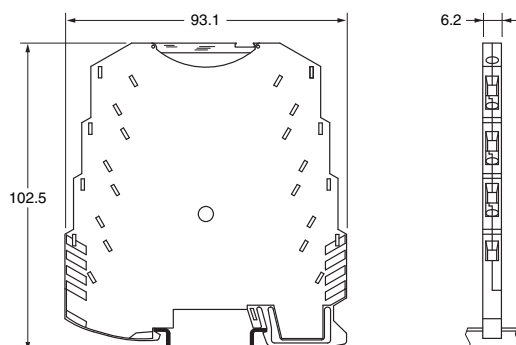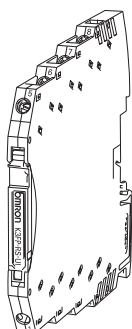

**Note: 1.** Use solid wire with a diameter of 2.5 mm<sup>2</sup> max. or bar terminals with insulation sleeves for terminal connections. To preserve dielectric strength after connection, the length of the exposed conductive part inserted into the terminal must be 12 mm max.



**2. Screw Tightening Torque**  
Recommended torque:  
0.5 N·m

# Safety Precautions

Refer to *Safety Precautions for the K3FP Series*.

## ■ Precautions for Correct Use

### Diagnostics Indicator


The diagnostics indicator (LED) inside the translucent cover shows the error status, as outlined in the following table.

Indicator status	Error details
Flashing	Measuring range span less than 50 K
Lit	Disconnection on the platinum resistance thermometer side
	Short circuit on the platinum resistance thermometer side
	Above measurement range
	Below measurement range

### Connections


#### 2-conductor Connection

- For short distances (less than 10 m)
- Cable resistances  $R_{L1}$  and  $R_{L2}$  are incorporated in the measurement result directly and falsify the result accordingly.

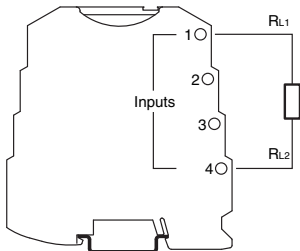


#### 3-conductor Connection

- For long distances between PT100 platinum resistance thermometers and K3FP-RS-UI RTD Transducers.
- The value of all cable resistances must be exactly the same to balance out the PT100 platinum resistance thermometer cable resistances ( $R_{L1} = R_{L2} = R_{L3}$ ).

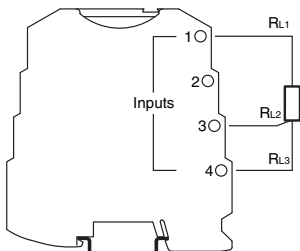

#### 4-conductor Connections

- For long distances between the PT100 platinum resistance thermometer and the K3FP-RS-UI and different cable resistances ( $R_{L1} \neq R_{L2} \neq R_{L3} \neq R_{L4}$ ).

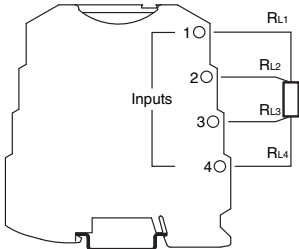

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

# Safety Precautions for the K3FP Series

Refer to *Precautions* in each product information sheet for specific precautions for individual products.

## ⚠ CAUTION

Do not touch terminals while power is supplied. Doing so may occasionally result in minor or moderate injury.



Do not allow pieces of metal, wire clippings, or fine metallic shavings or filings to enter the product. Doing so may occasionally result in minor or moderate injury or in property damage due to electric shock, fire, or malfunction caused by internal short circuiting.



Do not use the product in locations where flammable or explosive gases are present. Doing so may occasionally result in minor or moderate explosion, causing minor or moderate injury, or property damage.



Tighten the screws on the terminal block and the connector locking screws securely using the recommended tightening torque of 0.5 N·m. Loose screws may occasionally cause fire, resulting in minor or moderate injury, or damage to the equipment.



Product failure may occasionally prevent operation of comparative outputs, resulting in damage to the connected facilities and equipment. Ensure safety in the event of product failure by taking safety measures, such as installing a separate monitoring system.



Do not attempt to disassemble, repair, or modify the product. Doing so may occasionally result in minor or moderate injury due to electric shock.



## ■ Precautions for Safe Use


- Do not use or store the product in the following locations.
  - Locations subject to direct radiant heat from heating equipment
  - Locations where the product may come into contact with water, oil, or salt water
  - Locations subject to direct sunlight
  - Locations where dust or corrosive gases (in particular, sulfuric or ammonia gas) are present
  - Locations subject to extreme temperature changes
  - Locations where icing or condensation may occur
  - Locations subject to excessive shocks or vibration
  - Locations subject to temperatures outside the specified range
  - Locations outdoors or exposed to wind or rain
  - Locations subject to static electricity or noise
- Do not use the product in locations subject to temperatures outside the specified ranges or in locations subject to condensation. If the product is installed in a panel, be sure that the temperature around the product (not the temperature around the panel) does not go outside the specified range. The life of components is dependent on the temperature. The life of components shortens when the temperature rises, and it lengthens when the temperature falls. The life of components can be lengthened by lowering the temperature inside the product.
- In order to prevent inductive noise, wire the lines connected to the product separately from power lines carrying high voltages or currents. Do not wire in parallel with or in the same cable as power lines. Other measures for reducing noise include running lines along separate ducts and using shield lines.
- Do not install the product near devices generating strong high-frequency waves or surges. When using a noise filter, check the voltage and current and install it as close to the product as possible.
- Do not use organic solvents (e.g., thinners or benzene), strong alkaline, or strong acidic material on the outside of the product. Doing so will damage the outer cover of the product.
- Dispose of the product as industrial waste.

## ■ Precautions for Correct Use

### Wiring

- Do not touch terminals or perform wiring while power is supplied to the product. Doing so may result in injury or malfunction.
- The K3FP contains components that may be damaged or destroyed by electrostatic discharge. When handling the K3FP, observe the necessary safety precautions against electrostatic discharge (ESD) in accordance with EN 61340-5-1 and EN 61340-5-2 as well as IEC 61340-5-1 and IEC 61340-5-2.
- Wire to the correct terminal number. Incorrect wiring may result in damage to or burning of components.

### Screw Connections

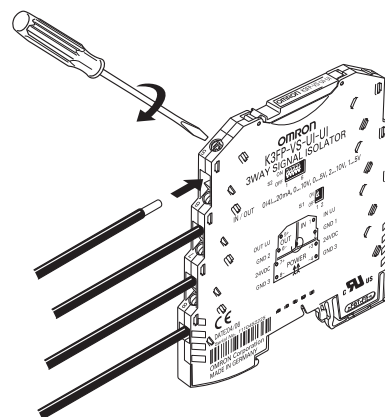


## Mounting


- The K3FP can be mounted on to all 35-mm DIN rail corresponding to EN 60715. When connecting the K3FP to a DIN rail bus connector, take particular care with the direction of both the K3FP and the Power Bridge.
- When connecting to a DIN rail bus connector, mount the DIN rail bus connector to the DIN rail before connecting the K3FP to the DIN rail bus connector.

### Mounting DIN Rail Bus Connectors


1. Connect the DIN rail bus connectors together.

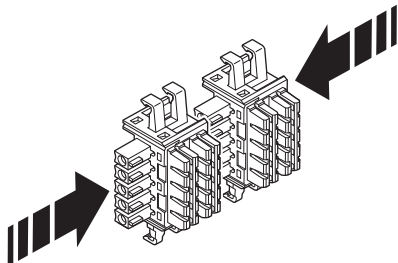


2. Mount the connectors to the DIN rail.

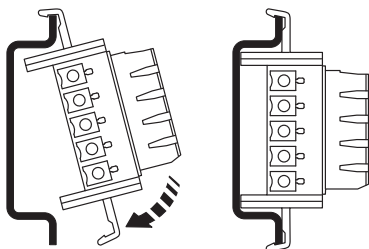


3. Check the mounting direction.

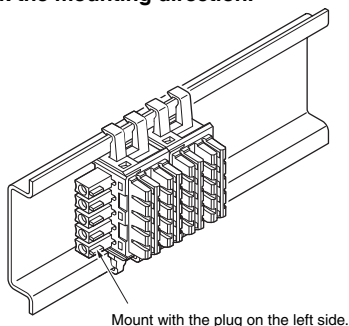

### Mounting the K3FP

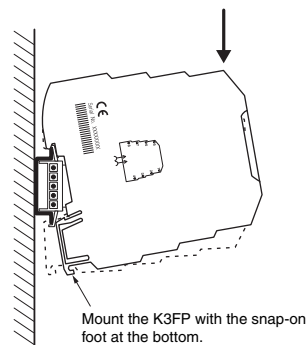

### Removing the K3FP

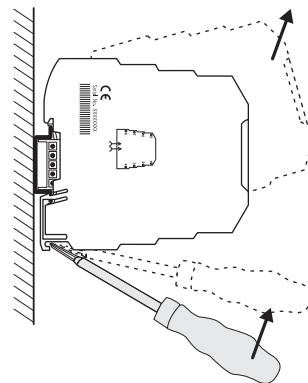

- A DIN rail bus connector supplies the active devices. No DIN rail bus connector is necessary to operate the K3FP-SN1-1-1 or K3FP-SN2-1-1 Passive Loop-powered Isolators. It is, however, possible to snap the passive loop-powered isolators onto a DIN rail bus connector. An electrically conductive connection is not established so no existing DIN rail bus connection needs to be disconnected.
- Refer to the *Internal Block Diagram* for each product for block diagrams.
- Be sure that the DIN rail is mounted securely with no loose screws. If the screws are loose, vibration or shock may cause the product or wiring to become disconnected.

## Power Supply Voltage

- Never connect power supply voltage directly to the DIN rail bus connector.
- Do not draw power from the DIN rail bus connector or from individual K3FP Units.
- When the total current consumption of the aligned K3FP Units does not exceed 400 mA, the power can be fed in directly at the connecting terminal blocks of a K3FP. It is recommended that a 400-mA fuse is connected upstream.
- Be sure power supplies and power lines for control power supply and inputs have appropriate specifications. Not using power supplies and power lines with appropriate specifications may result in malfunction, burning, or electric shock.

## Recommended Drivers

Manufactured by Phoenix Contact

SZS 0.6 × 3.5 (insulated)

SZF 1-0.6 × 3.5 (non-insulated)

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.