

Motor Condition Monitoring Devices

K6CM series

Stay alert to motor failures with 24/7 motor condition monitoring

Load abnormality


CI Comprehensive current diagnosis [Ver.UP] **NEW**

Bearing wear

VB Vibration & temperature monitoring

Insulation degradation

IS Insulation resistance monitoring

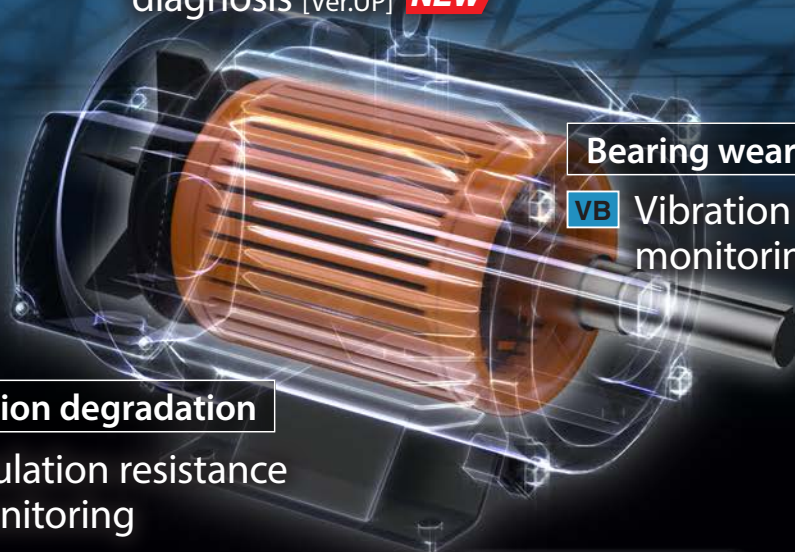

- Applicable in environment with inverters
- Prioritize maintenance inspections
- Monitor up to 10 motors remotely using the included PC monitoring software
- Clamp-type CT which is easy to install on existing equipment

EtherNet/IP[®]
Modbus



Reduce the amount of required manual inspections

K6CM informs you when your motor requires

[Problems]


It's difficult to prevent motor issues caused by degradation.

The conventional motor condition check had several check items. Therefore a skilled maintenance engineer was required to judge the motor's maintenance timing. Additionally, inspection was time-consuming because there were many motors.

Example of patrol inspection items



Phenomenon Symptoms	Vibration	Heat generation	Decreased electrical resistance	Overcurrent
Bearing wear	✓	✓		✓
Insulation degradation			✓	
Overload	✓	✓		✓
Open phase		✓		

Motor failure mode

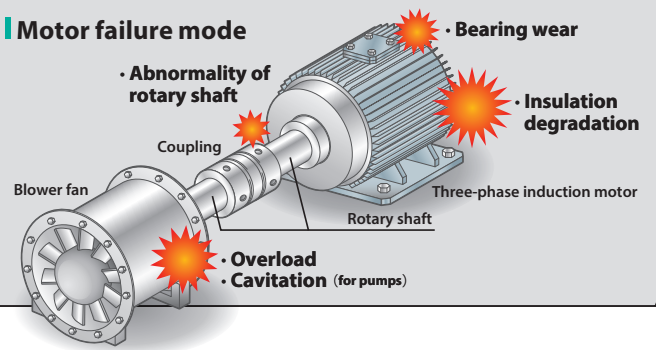

Monitors the 3-phase induction motor which is critical to facility operations


Ventilation fans in odorous gas treatment facilities

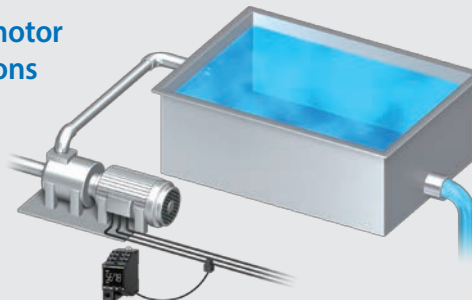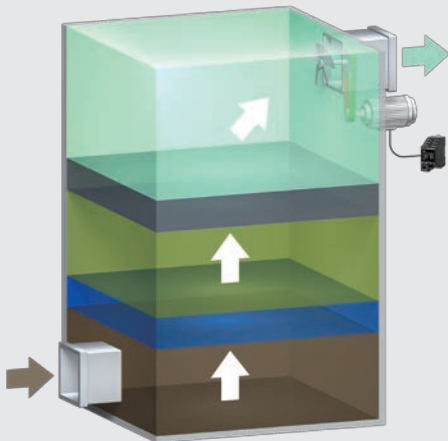

Washing pumps for automotive components



Dryers (for spray-drying powders)

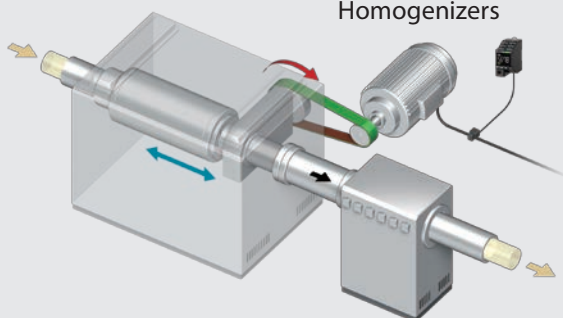

Homogenizers

Notify the factory floor with stack light




maintenance

[Solution from OMRON]

Motors can be maintained in advance of failure due to degradation.

K6CM (comprehensive current diagnosis type) can consistently monitor the degradation tendency of the motor by observing the current waveform of the motor and processing complex analysis such as the frequency analysis, instead of a skilled maintenance engineer. Additionally, you can understand the motor's maintenance timing without depending on an engineer, because K6CM provides threshold value setting.

What is comprehensive current diagnosis?

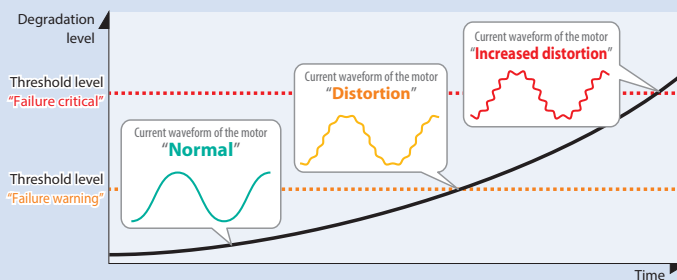

When an abnormality occurs in the load such as bearing, rotary shaft, or reducer, the motor does not rotate smoothly and a distortion occurs in its current waveform. K6CM measures its distortion as a degradation level.

K6CM Motor Condition Monitoring Devices



- ◆ Development Award of the TPM Award for Excellent Products 2018
- ◆ GOOD DESIGN AWARD 2018

Monitor up to 10 motors with PC software

With the accessory software "Motor Condition Monitoring Tool", you can monitor motor conditions remotely.

* The screen is a sample image.




EtherNet/IP™
Modbus

Motor Condition Monitoring Device Lineup

Note. Applicable motor type: three-phase induction motor

type 01 Comprehensively monitors motor and load abnormalities through degradation level

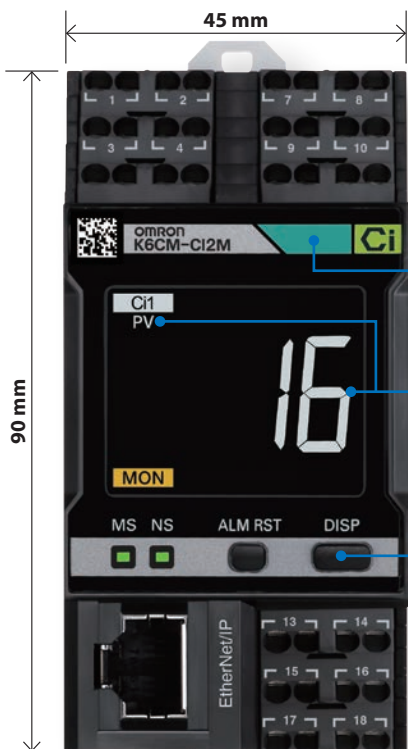

K6CM-CI



Comprehensive current diagnosis type

Alarm bar display

- Green : Status normal
- Yellow : Failure warning
- Red : Failure critical

Display

- [PV] : Present value
- [MIN] : Minimum value
- [MAX] : Maximum value

Switches the units of the measured value displayed

- [Ci1] : Degradation level 1
- [Ci2] : Degradation level 2
- [A] : Current

<Actual size>



special CT
K6CM-CICB


Easy setup!

To perform monitoring, simply clamp the CT to the power line connected to the three-phase induction motor.
The maximum of measurement range of 600A.



Also detects load abnormalities

When a load abnormality occurs, the current waveform of the motor changes, which allows the load abnormality to be detected.

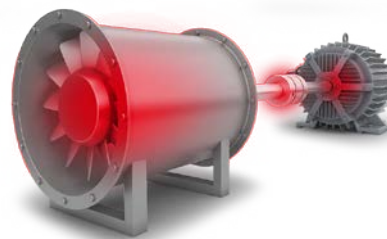

Multiply to monitor the abnormalities by measuring degradation level 1 and degradation level 2, that are measured with different algorithms

Degradation level 1

Degradation level 1 is suited to monitoring abnormalities that have an irregular affect on the shaft of the motor because it can quantify the degree of deviation between the smooth sine wave of the ideal state and the entire current waveform as obtained during the sampling period.

[Abnormality detection]

Cavitation, Air contamination, etc.

Degradation level 2 **NEW**


Degradation level 2 is suited to monitoring abnormalities which occurs periodically because certain frequency components among the frequency components affecting the rotating shaft of the motor are clearly captured and quantified. Even in environment with inverter noise, a motor or load abnormality can be captured with excellent sensitivity.

[Abnormality detection]

Misalignment, Load imbalance, Foreign matter adhesion, etc.


Comprehensive current diagnosis parameters are applicable for a wide range of motor abnormalities.

Normal state when inverters are used

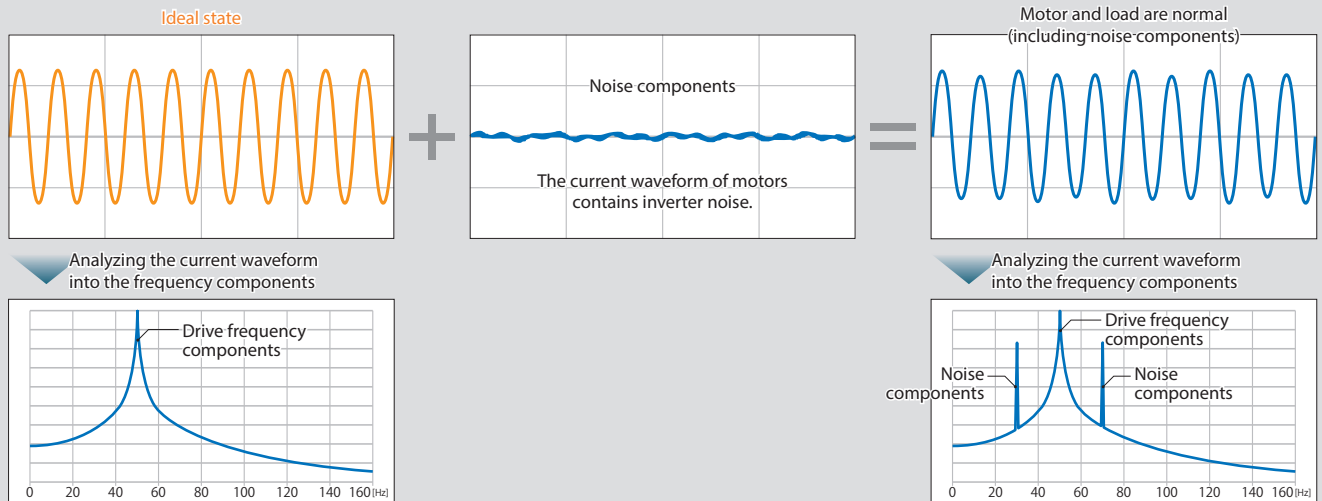


Irregular change Degradation level 1

In the case of the abnormality with higher sensitivity of degradation level 1.

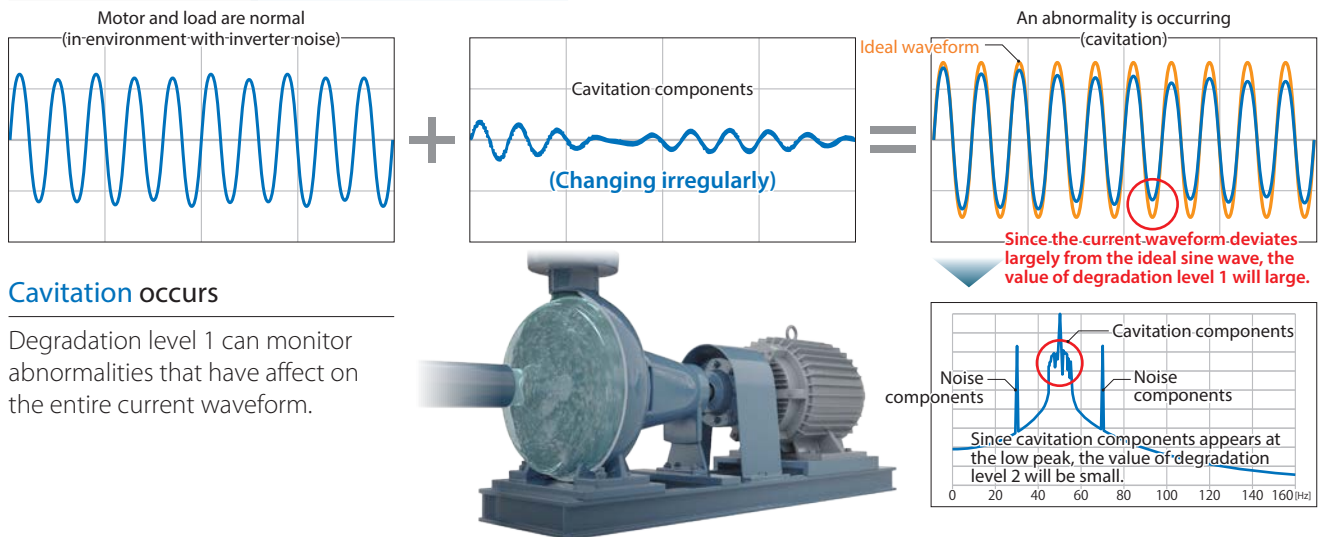

Periodic change Degradation level 2

In the case of the abnormality with higher sensitivity of degradation level 2.

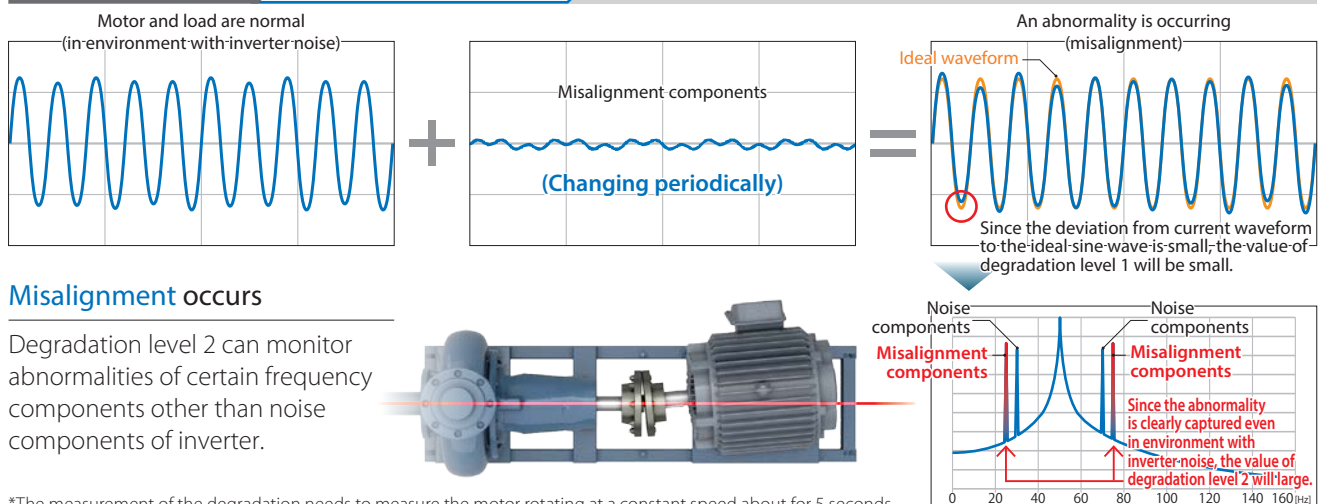

*The measurement of the degradation needs to measure the motor rotating at a constant speed about for 5 seconds.

Motor Condition Monitoring Device Lineup

Note. Applicable motor type: three-phase induction motor

type **02** Monitors bearing abnormalities through vibration and temperature



K6CM-VB



Vibration & temperature monitoring type


Detects abnormalities in bearings

By constantly monitoring for vibrations, it can detect signs of abnormalities in bearings and the like as soon as possible.

Constantly monitors temperature






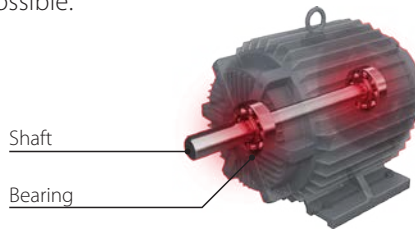






The surface temperature of the routinely inspected motor can be measured at the same time as vibrations.

Pre-amplifier and Vibration & temperature sensor K6CM-VBS



*Use K6CM-VBSAT1, the adhesive attachment if the motor cannot be tapped.

Measuring vibration detection frequency up to 10 kHz can detect motor abnormalities at the earlier stage.

Bearing condition	 New	 Grease degraded	 Damages	 Breakdown
Motor condition	 Working smoothly	 Working smoothly	 Abnormal noise occurs	 Overheating/shaking
Motor vibration			 The values change shortly and rapidly when motors are shaking by damages. Monitored by acceleration.	 The values change largely and slowly when motors are shaking by breakdown. Monitored by velocity.
Measurement range by sensor	No vibration Out of range of measurement by sensor		High frequency Amplitude: small Acceleration 1 to 10 kHz Amplitude: medium Within range of measurement by acceleration	0.01 to 1 kHz Amplitude: large Velocity Within range of measurement by velocity

type 03 Constantly monitors the insulation resistance




K6CM-IS




Insulation resistance monitoring type

Measures insulation resistance


With conventional products, measurement with a Megger Tester was necessary to check for insulation degradation. K6CM-IS can be used to perform this inspection during operation, making it possible to constantly monitor degradation trends while reducing the burden on the maintenance personnel.

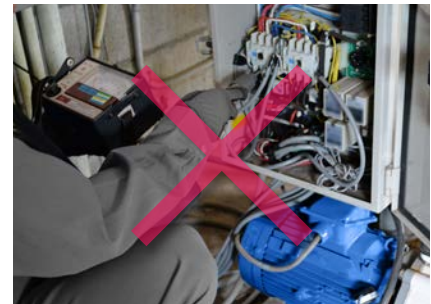


This eliminates the need for complicated insulation resistance measurements.

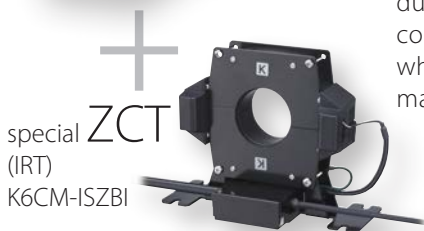

The insulation resistance at the secondary side of an inverter can be measured.

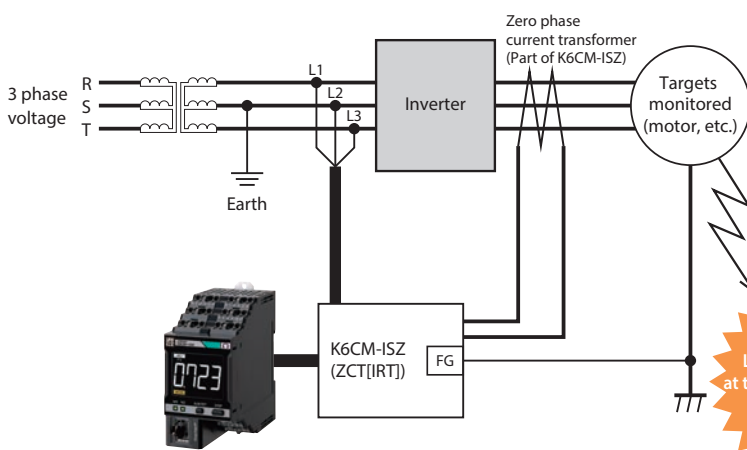

Previously, measuring insulation resistance has been difficult because the leakage current at the secondary side of an inverter repeatedly increase and decrease due to the gap between commercial current and inverter current. K6CM-IS can measure the leakage current at the secondary side of an inverter by OMRON's unique technology.

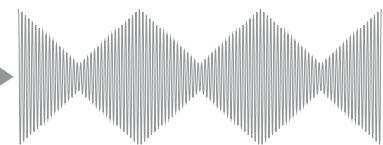

The image of the leakage current waveform at the secondary side of an inverter.

The current value increase and decrease repeatedly.


*The measurement of insulation resistance needs about 10 seconds while driving the motor by direct connection to commercial power supply and about 60 seconds by the inverter.

Features Three functions for monitoring motor condition

1 Visual inspection through alarm bar display and two-step output

Alarm bar and output function


The K6CM series is equipped with an "alarm bar display" on the front of the product. The condition of motor is displayed by color-coding as green, yellow, or red. This shows the degree of abnormality and is helpful for visual inspection near the motor. Accordingly "failure warning" and "failure critical" statuses are also output. In addition, by using "display auto switching mode", you can see the measurement value in each without operation.

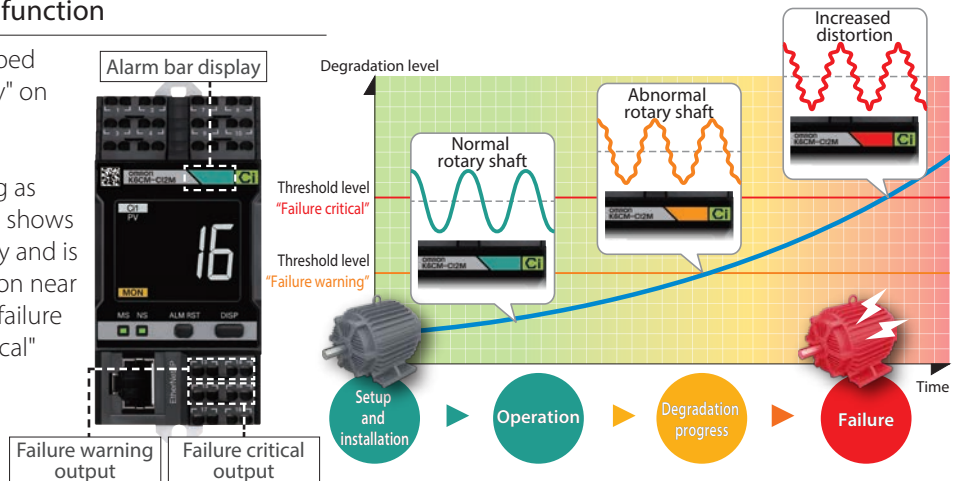

2 Monitors stable values even when load fluctuates

Trigger input function

Equipped with a "trigger input function" that measures the measurement timing according to the motor operation in order to accurately diagnose the condition of motors that are repeatedly started and stopped. The motor condition is determined from the operation signals (auxiliary output of the contactor and the PLC control signal), and measurement is only performed when the motor operation is stabilized, enabling fixed point observation on a daily or monthly basis under the same conditions. And the monitoring delay time function can be used to wait for the measurement values to stabilize. This function can delay the start of monitoring after the trigger input.

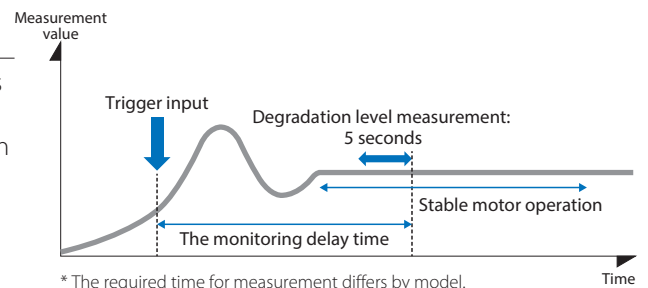

* The required time for measurement differs by model.

3 Self-diagnosis function that improves system reliability

Self-diagnosis function

When constantly monitoring for a long period of time, unexpected failures and other problems of measuring devices must be taken into consideration. The K6CM series is equipped with a self-diagnosis function as standard. The reliability of the system is improved by monitoring the service life of the device to be measured.



Status display "AGE"

Lights up when the guideline for the replacement time is reached.

Motor Condition Monitoring Tool

The setting and monitoring tool software "Motor Condition Monitoring Tool" and the K6CM series are linked. Both allow the motor condition to be monitored visually with green, yellow, and red color-coding.
 (Motor Condition Monitoring Tool is stored on the CD shipped with the K6CM device.)




Motor condition list display



The conditions of up to 10 motors are displayed as a list through the K6CM series connected to the network. The data of up to 30 K6CM units can be viewed. (Three types of K6CM can be installed to one motor)

Displays condition list at same time as device displays

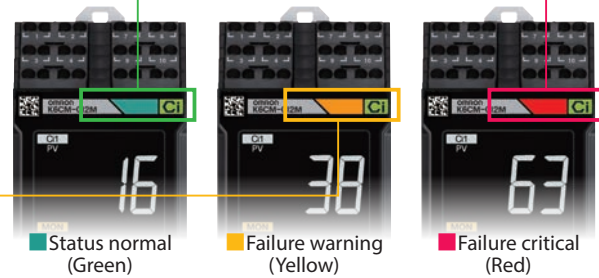

Error history display



- Vibration/temperature monitoring type
- Insulation resistance monitoring type
- Comprehensive current diagnosis type

Displays the alarm statuses of multiple motors. Allows changes in the motor condition to be checked as a time series.

Initial setting

Initial settings of the K6CM series such as trigger input settings, motor information registration, network settings, and threshold adjustment can be made from a PC.



Enter the shaft diameter, rotation speed and capacity, and you can automatically set the K6CM-VB threshold.

Trend graph display



Allows the measured value trends to be checked on graphs.


Data can be output as a CSV file


Measured and accumulated data can be output in CSV format. This is useful for creating reports and statistical materials.





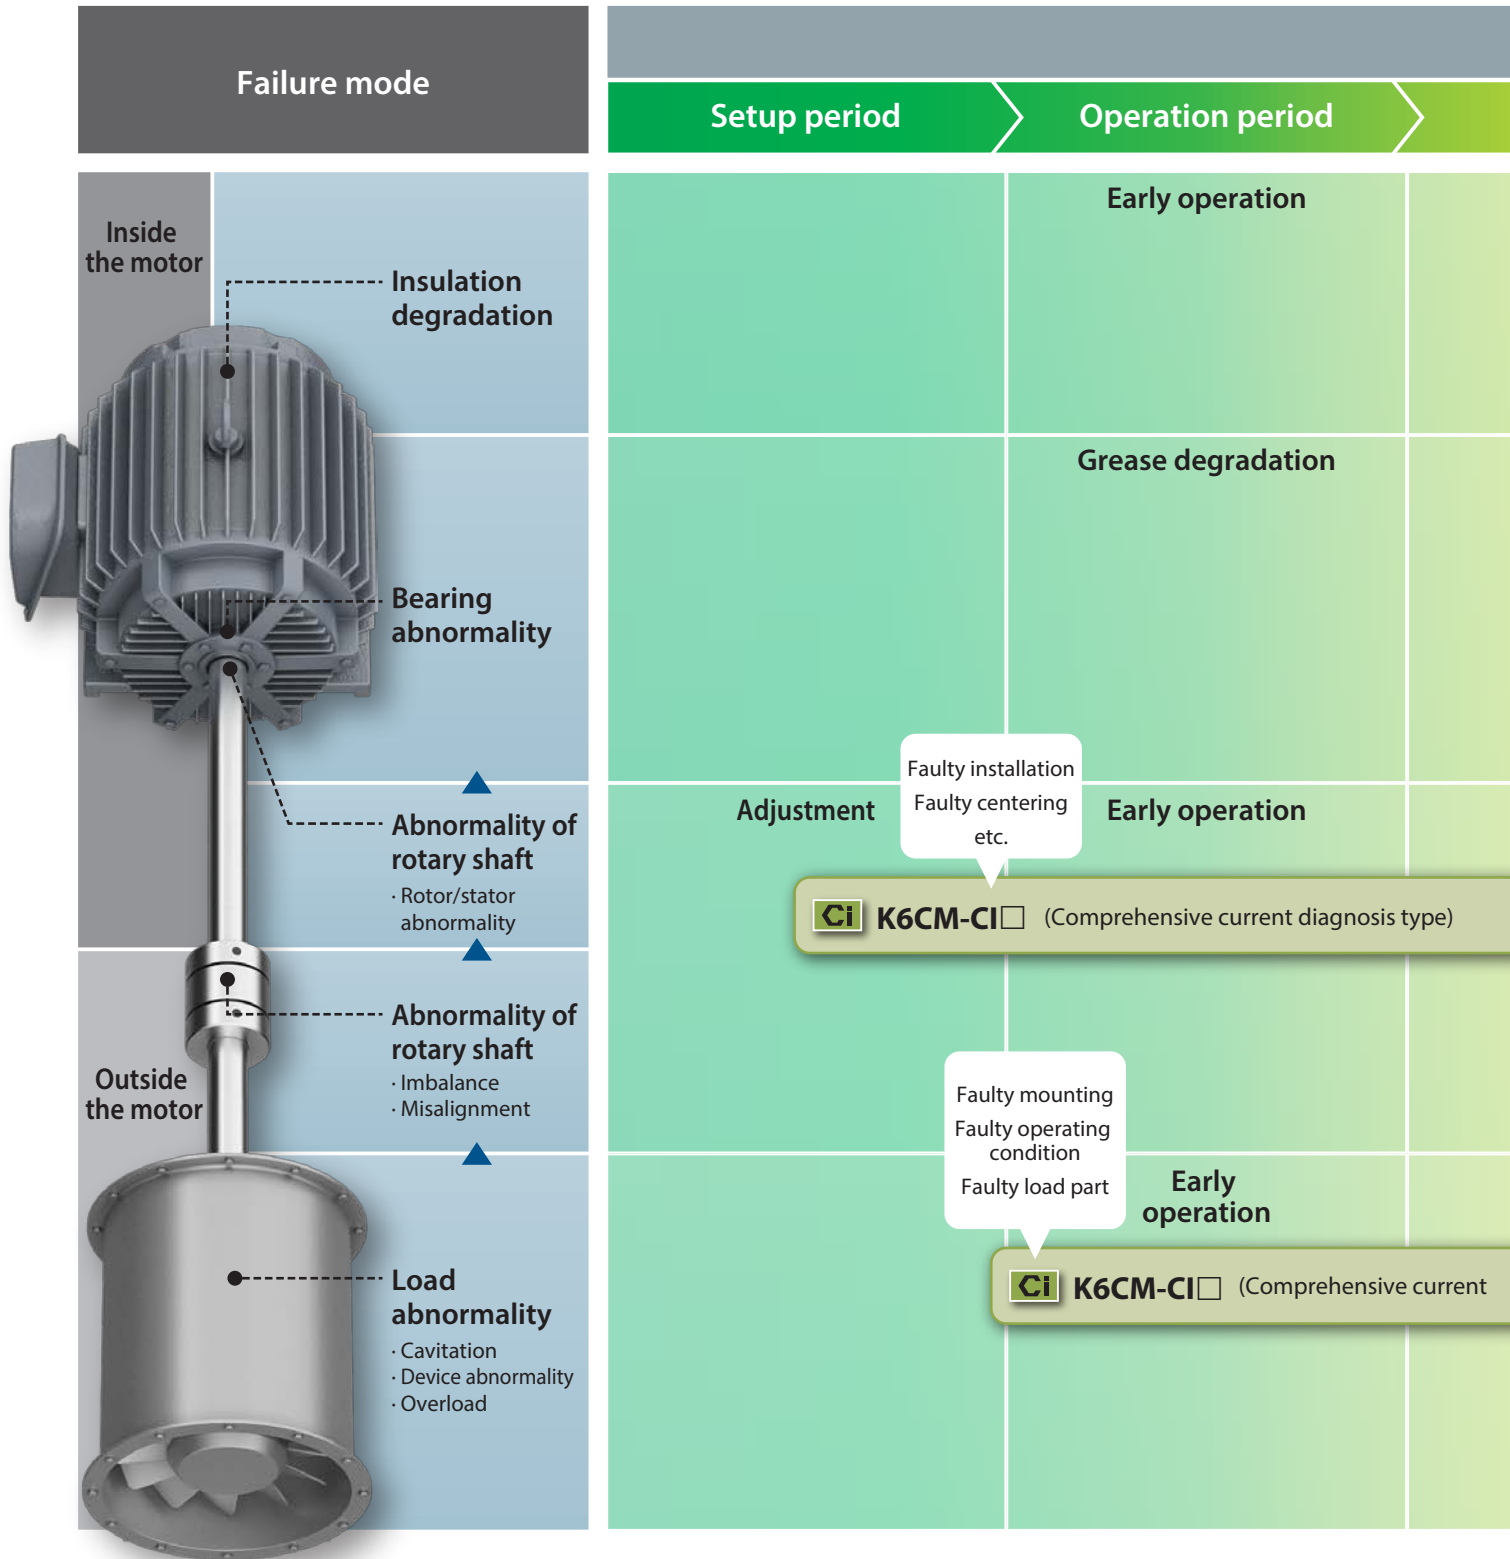

Degradation progress/failure mode correspondence table

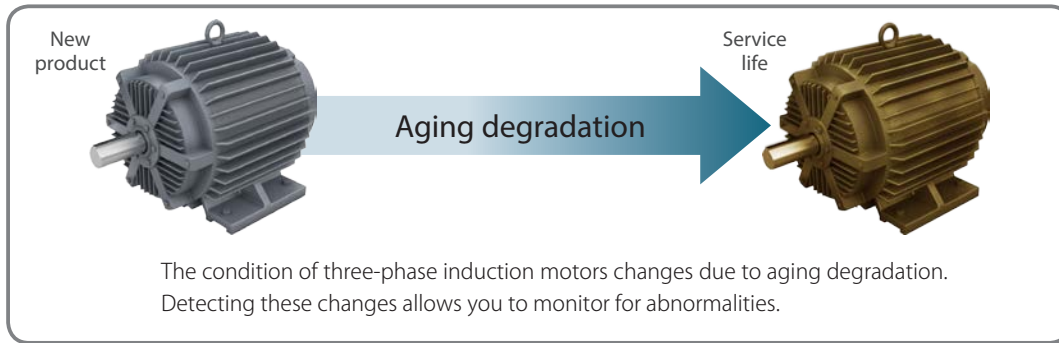After installing a three-phase induction motor, performing proper maintenance by monitoring the motor condition will prolong its service life.


Please select the optimal model for the type of abnormality you want to detect.





Motor and load condition	
Degradation progress period	Breakdown period
Insulation degradation 	Insulation breakdown <div style="border: 1px solid black; padding: 5px; background-color: #f0e6f0;">  K6CM-IS (Insulation resistance monitoring type) [Insulation degradation] </div>
Bearing damage 	Bearing breakdown <div style="border: 1px solid black; padding: 5px; background-color: #e0f0e0;">  K6CM-CI (Comprehensive current diagnosis type) [Degradation level] </div>
Degradation progress of motor [Degradation level]	<div style="border: 1px solid black; padding: 5px; background-color: #e0f0f0;">  K6CM-VB (Vibration & temperature monitoring type) [Velocity] </div>
Degradation progress of load diagnosis type) [Degradation level]	<div style="border: 1px solid black; padding: 5px; background-color: #e0f0f0;">  K6CM-VB (Vibration & temperature monitoring type) [Velocity] </div>

 **K6CM-CI** (Comprehensive current diagnosis type) [Overcurrent]

 **K6CM-VB** (Vibration/temperature monitoring type) [Temperature]

The measurement value in each model is a typical example.

- Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
- EtherNet/IP™ is a trademark of ODVA.
- Modbus is a registered trademark or trademark of Schneider Electric USA, Inc. in Japan, the United States or other countries.
- TPM trademarks and logos are registered trademarks or trademarks of the Japan Institute of Plant Maintenance in Japan and other countries.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- Some images are used under license from Shutterstock.com.
- Before you place an order, please read and understand "Terms and Conditions Agreement" on K6CM Datasheet (Cat. No. N218).

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2017-2020 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_8

Cat. No. N220-E1-07

0320(1117)