


# OMRON

## Mark Sensor with Stainless Steel Housing

Compact, Photoelectric Sensor with Built-in Amplifier and Teaching Function

**E3ZM-V**

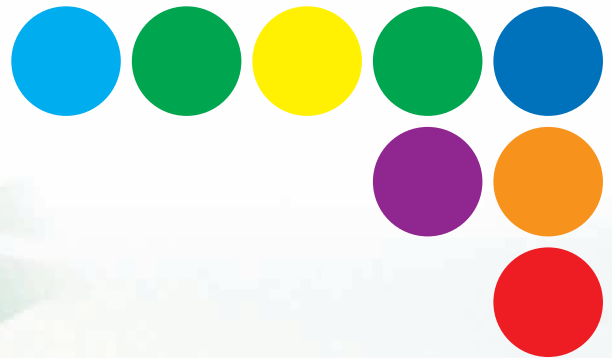

**Color Mark Detection in a World-standard Size (11 × 21 × 32 mm),  
with High-speed Response (50 μs) and Accuracy in Spite of  
Sensing Object Movement**

**realizing**

Another Advance for the E3ZM Series in the Food and Packaging Industries.

# World's Smallest\* Color-mark Sensor with Built-in Amplifier

The E3ZM-V provides superior optical performance and yet is the same size as the E3Z. This compact, high-speed Mark Sensor remains accurate in spite of sensing object movement.

\*According to OMRON investigation.

## Color Mark Sensors Now Join the E3ZM Series of Photoelectric Sensors for the Food Industry

### ■ Space-saving Design with an SUS316L Housing

E3ZM  
Standard Size

The compact design reduces volume by 90% compared with previous OMRON models.

And the world-standard dimensions contribute to standardized installation specifications.

Previous OMRON model  
(E3M-V)




### ■ Coaxial Optical System in a Compact Design


Although the E3ZM-V is only 11 × 21 × 32 mm, it uses a coaxial optical system.

Even if the sensing object is inclined, reflected light is captured with the coaxial optical system to provide stable detection.

#### Straight Sensing Object

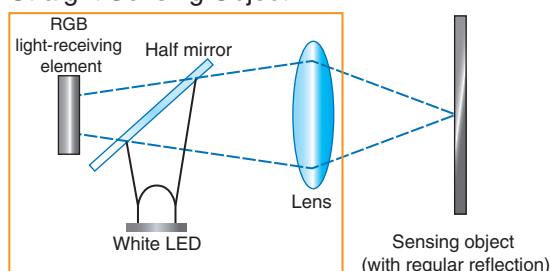


#### Inclined Sensing Object

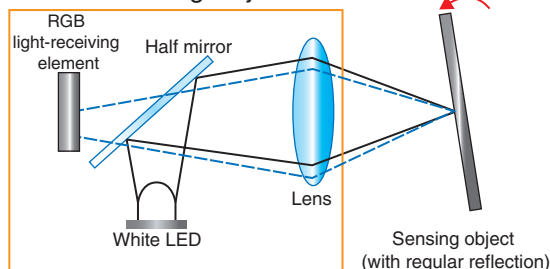

### ■ IP69K Degree of Protection with an SUS316L Housing

Same Durability  
as the E3ZM

The housing is constructed of corrosion-resistant SUS316L, and the display cover is PES (polyethersulfone). Both materials are highly resistant to the effects of detergents and disinfectants. IP69K degree of protection also allows the E3ZM-V to withstand washing with high-temperature, high-pressure water. This makes the E3ZM-V well suited to use in sites requiring a high level of hygiene.



## Cutting-edge Technologies Give This Color Mark Sensor Its Compact Size and Superior Performance.


### ■ Improved Color-difference Discrimination, RGB Signal Processing

Discriminates fine color differences which was difficult for previous OMRON models.

Teaching enables automatic selection of ideal colors.

Plus, response is a fast 50  $\mu$ s for both ON and OFF operation.

**Patent pending**

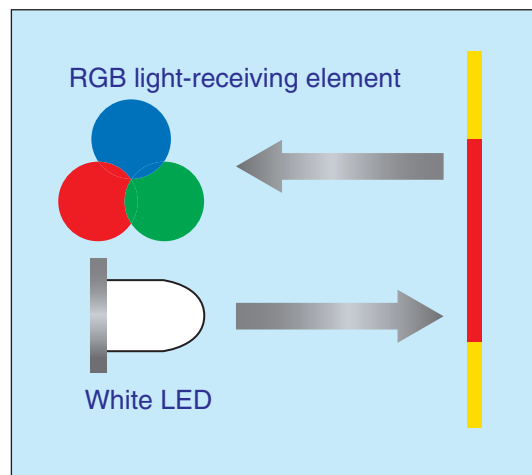

### ■ Easy Setting with 2-point and Automatic Teaching

#### ● 2-point Teaching (Manual)


Simply aim the beam spot at the mark portion and background portion, and press the teaching button.



#### ● Automatic Teaching (Remote)

Send a pulse to the remote control input and have the mark pass by seven times for automatic teaching.

(Note: There is no answer-back output.)

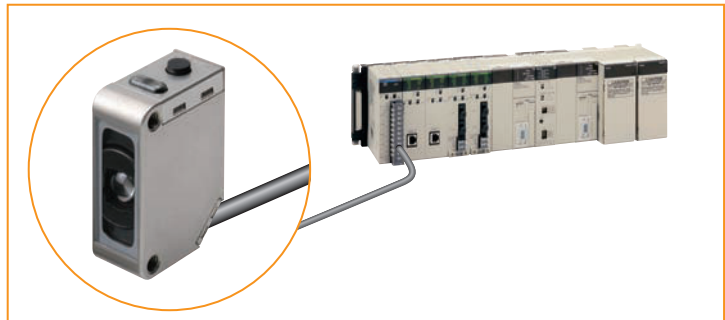

# E3ZM-V

## Industry's Smallest Color Mark Sensor



- Excellent space savings. (Reduced by 90% compared with previous OMRON models.)
- Improved color-difference discrimination with white LED and RGB signal processing.
- Equipped with two types of teaching: 2-point teaching and automatic teaching.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

## Ordering Information

**Sensor** [Refer to *Dimensions* on page 13.]

White light

| Sensing method                      | Appearance | Connection method      | Sensing distance | Model              |                    |
|-------------------------------------|------------|------------------------|------------------|--------------------|--------------------|
|                                     |            |                        |                  | NPN output         | PNP output         |
| Mark Sensor<br>(Diffuse reflective) |            | Pre-wired (2 m)        | 12±2 mm*         | <b>E3ZM-V61 2M</b> | <b>E3ZM-V81 2M</b> |
|                                     |            | Connector (M8, 4 pins) |                  | <b>E3ZM-V66</b>    | <b>E3ZM-V86</b>    |

\* A deviation of ±2 mm (typical value) can be handled for combinations of white, yellow, and black. Refer to page 7 for the detection capability for other color combinations.

## Accessories

### Sensor I/O Connectors (Sockets on One Cable End)

(Models for Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.)

[Refer to *Dimensions* on XS3.]

| Size        | Cable    | Appearance    | Cable type | Model                  |
|-------------|----------|---------------|------------|------------------------|
| M8 (4 pins) | Standard | Straight *1   | 2 m        | <b>XS3F-E421-402-A</b> |
|             |          |               | 5 m        | <b>XS3F-E421-405-A</b> |
|             |          | L-shaped *1*2 | 2 m        | <b>XS3F-E422-402-A</b> |
|             |          |               | 5 m        | <b>XS3F-E422-405-A</b> |










**Note:** The outer cover of the cable is made of PVC (polyvinyl chloride), the nut is SUS316L, and the degree of protection is IP67. When high-pressure washing will be used, select an I/O Connector that has IP69K degree of protection.

\*1. The connector will not rotate after connecting.

\*2. The cable is fixed at an angle of 180° from the sensor emitter/receiver surface.

**Mounting Brackets** A Mounting Bracket is not provided with the Sensor. Order a Mounting Bracket separately if required.

[Refer to *Dimensions* on *E39-L/E39-S/E39-R.*]

| Appearance   | Model<br>(Material)                      | Quantity | Remarks                                | Appearance   | Model<br>(Metal<br>material)             | Quantity | Remarks  |
|--|--|----------|--|--|--|----------|--|
|   | <b>E39-L153</b><br>(SUS304)<br><i>*1</i> | 1        | Mounting Brackets                      |   | <b>E39-L98</b><br>(SUS304)<br><i>*2</i>  | 1        | Protective Cover Bracket   |
|   | <b>E39-L104</b><br>(SUS304)<br><i>*1</i> | 1        |  |   | <b>E39-L150</b><br>(SUS304)              | 1        | (Sensor adjuster)<br>Easily mounted to the<br>aluminum frame rails of<br>conveyors and easily<br>adjusted.<br>For vertical angle<br>adjustment |
|   | <b>E39-L43</b><br>(SUS304)<br><i>*2</i>  | 1        | Horizontal Mounting<br>Bracket         |   | <b>E39-L151</b><br>(SUS304)              | 1        |  |
|   | <b>E39-L142</b><br>(SUS304)<br><i>*2</i> | 1        | Horizontal Protective<br>Cover Bracket |  |  |          |  |
|  | <b>E39-L44</b><br>(SUS304)               | 1        | Rear Mounting Bracket                  |  | <b>E39-L144</b><br>(SUS304)<br><i>*2</i> | 1        | Compact Protective Cover<br>Bracket  |

**Note:** When using Through-beam models, order one bracket for the Receiver and one for the Emitter.

\*1. Cannot be used for Standard Connector models with mounting surface on the bottom. In that case, use Pre-wired Connector models.

\*2. Cannot be used for Standard Connector models.

# E3ZM-V

## Ratings and Specifications


| Sensing method                     |            | Diffuse reflective (mark detection)   |
|------------------------------------|------------|---|
| Model                              | NPN output | E3ZM-V61/-V66   |
| Item                               | PNP output | E3ZM-V81/-V86   |
| Sensing distance                   |            | 12±2 mm *1  |
| Sensing range                      |            | Depends on the combination of colors. Refer to <i>Engineering Data</i> on page 7 for details.   |
| Spot diameter                      |            | 2-mm dia. max.  |
| Light source (wavelength)          |            | White LED (450 to 700 nm)   |
| Power supply voltage               |            | 10 to 30 VDC, including 10% ripple (p-p)  |
| Power consumption                  |            | 750 mW max. (current consumption for a 30-V power supply voltage: 25 mA max.)   |
| Control output                     |            | Load power supply voltage: 30 VDC max., Load current: 100 mA max. (Residual voltage: 2 V max.)<br>Open-collector output (NPN/PNP output depending on model)   |
| Remote control input               |            | NPN output ON: Short-circuit to 0 V, or 1.5 V max. (source current: 1 mA max.)<br>NPN output OFF: Open or Vcc –1.5 V to Vcc (leakage current: 0.1 mA max.)<br>PNP output ON: Vcc –1.5 V to Vcc (sink current: 1 mA max.)<br>PNP output OFF: Open or 1.5 V max. (leakage current: 0.1 mA max.) |
| Operating modes                    |            | Set in the order of the teaching operation. *2  |
| Protection circuits                |            | Reversed power supply polarity, Load short-circuit protection, and Reversed output polarity protection  |
| Response time                      |            | Operate or reset: 50 µs max.  |
| Sensitivity adjustment             |            | Teaching method   |
| Ambient illumination               |            | (Receiver side) Incandescent lamp: 3,000 lx max., Sunlight: 10,000 lx max.  |
| Ambient temperature range          |            | Operating: –40 to 60°C (*3), Storage: –40 to 70°C (with no icing or condensation)   |
| Ambient humidity range             |            | Operating: 35% to 85%, Storage: 35% to 95% (with no condensation)   |
| Insulation resistance              |            | 20 MΩ min. (at 500 VDC)   |
| Dielectric strength                |            | 1,000 VAC at 50/60 Hz for 1 min   |
| Vibration resistance (destruction) |            | 10 to 55 Hz, 1.5-mm double amplitude for 2 h each in X, Y, and Z directions   |
| Shock resistance (destruction)     |            | 500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions   |
| Degree of protection *4            |            | IEC 60529: IP67, DIN 40050-9: IP69K   |
| Connection method                  |            | Pre-wired cable (standard length: 2 m) or M8 4-pin connector  |
| Indicator                          |            | Operating indicator (yellow), Stability indicator (green), and Teaching indicator (red)   |
| Weight (packed state)              |            | Pre-wired models (2-m cable): Approx. 85 g<br>Connector models: Approx. 35 g  |
| Materials                          | Housing    | SUS316L   |
|                                    | Lens       | PMMA (polymethylmethacrylate)   |
|                                    | Indication | PES (polyethersulfone)  |
|                                    | Buttons    | Fluoro rubber   |
|                                    | Cable      | PVC (polyvinyl chloride)  |
| Accessories                        |            | Instruction sheet <b>Note:</b> Mounting Brackets are purchased separately.  |

\*1. A deviation of ±2 mm (typical value) can be handled for combinations of white, yellow, and black. Refer to page 7 for the detection capabilities for other colors.

\*2. Mark Sensor output switching:  
When teaching, specify the ON color first and the OFF color second.

\*3. Do not bend the cable in temperatures of –25°C or lower.

\*4. IP69K Degree of Protection Specification  
IP69K is a protection standard against high temperature and high-pressure water defined in the German standard DIN 40050, Part 9. The test piece is sprayed with water at 80°C at a water pressure of 80 to 100 BAR using a specified nozzle shape at a rate of 14 to 16 liters/min. The distance between the test piece and nozzle is 10 to 15 cm, and water is sprayed horizontally for 30 seconds each at 0°, 30°, 60°, and 90° while rotating the test piece on a horizontal plane.



Standard Sensing Object for the Mark Sensor

| Color        | Munsell color notation |
|--------------|------------------------|
| White        | N9.5                   |
| Red          | 4R 4.5/12.0            |
| Yellow-red   | 4YR 6.0/11.5           |
| Yellow       | 5Y 8.5/11.0            |
| Yellow-green | 3GY 6.5/10.0           |
| Green        | 3G 6.5/9.0             |
| Blue-green   | 5BG 4.5/10.0           |
| Blue         | 3PB 5.0/10.0           |
| (Black)      | (N2.0)                 |

Engineering Data (Reference Value)

● Color vs. Detection Capability

E3ZM-V□□


Teaching Capabilities

|              | White | Red | Yellow-red | Yellow | Yellow-green | Green | Blue-green | Blue | Black |
|--------------|-------|-----|------------|--------|--------------|-------|------------|------|-------|
| White        |       | ○   | ○          | ○      | ○            | ○     | ○          | ○    | ○     |
| Red          | ○     |     | ○          | ○      | ○            | ○     | ○          | ○    | ○     |
| Yellow-red   | ○     | ○   |            | ○      | ○            | ○     | ○          | ○    | ○     |
| Yellow       | ○     | ○   | ○          |        | ○            | ○     | ○          | ○    | ○     |
| Yellow-green | ○     | ○   | ○          | ○      |              | ○     | ○          | ○    | ○     |
| Green        | ○     | ○   | ○          | ○      | ○            |       | ○          | ○    | ○     |
| Blue-green   | ○     | ○   | ○          | ○      | ○            | ○     |            | ○    | ○     |
| Blue         | ○     | ○   | ○          | ○      | ○            | ○     | ○          |      | ○     |
| Black        | ○     | ○   | ○          | ○      | ○            | ○     | ○          | ○    |       |

\* The above chart shows the combinations of colors for which teaching is possible at a sensing distance of 12 mm.

● Detectable Ranges

E3ZM-V□□

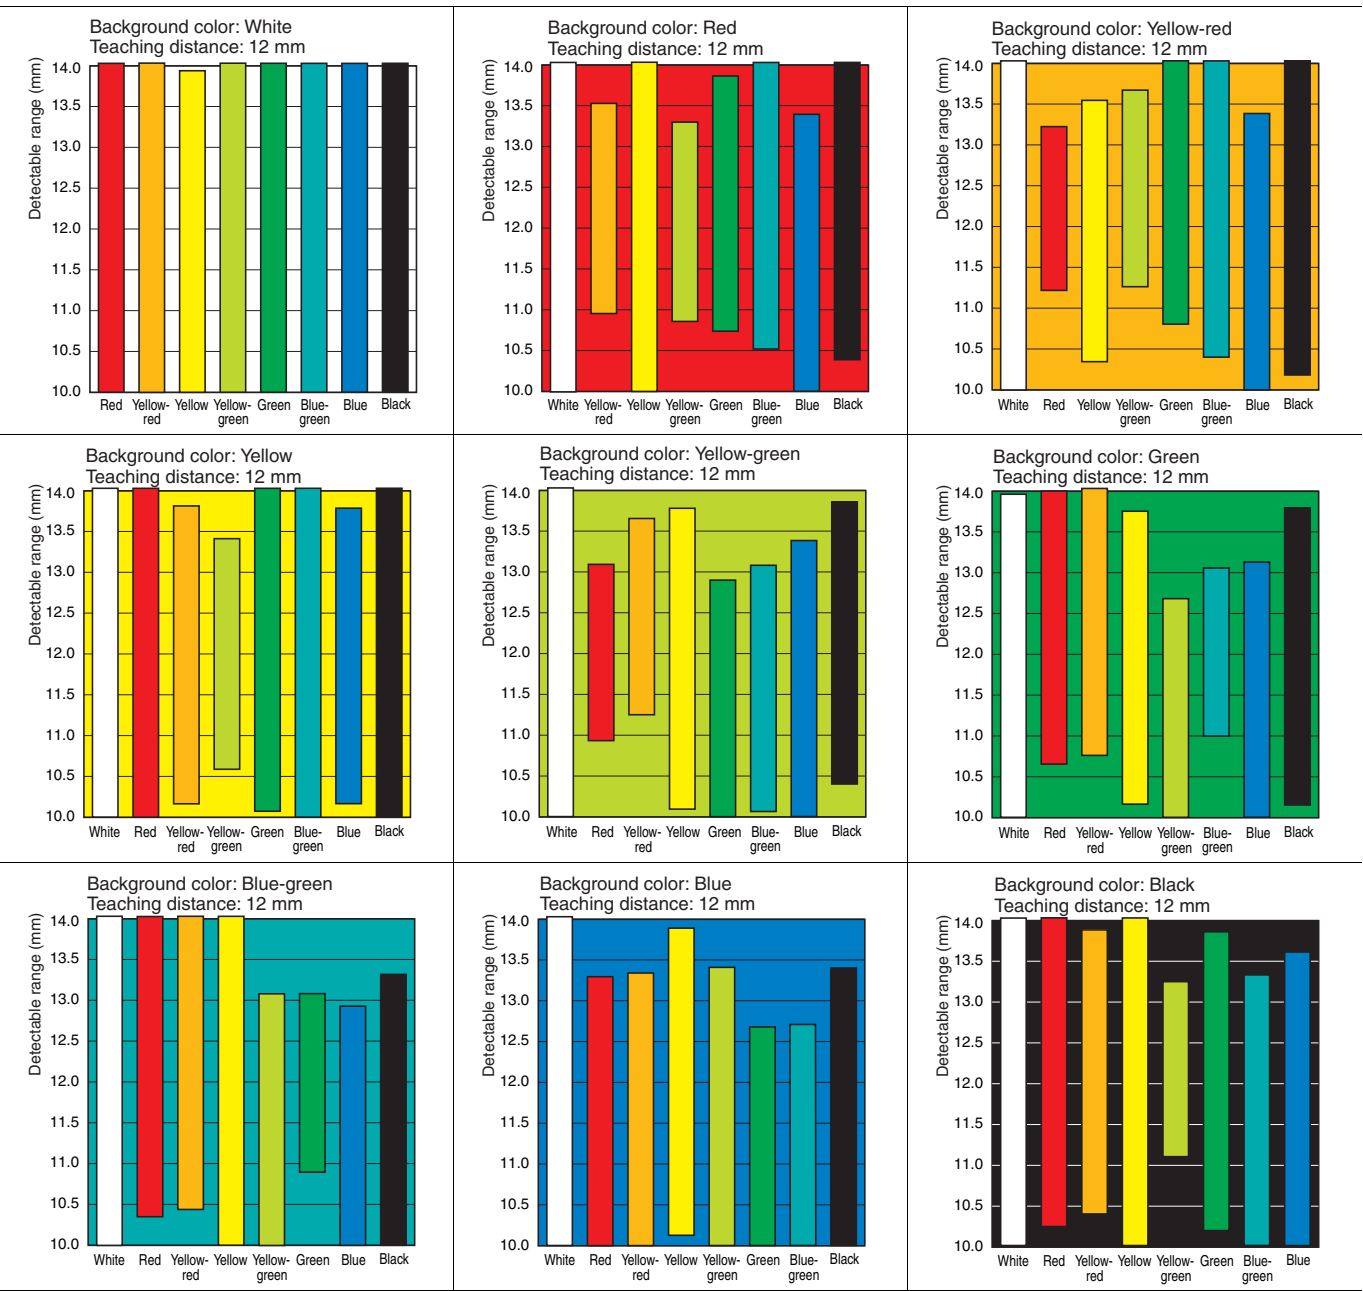




E3ZM-V


● Excess Gain vs. Distance

E3ZM-V□□

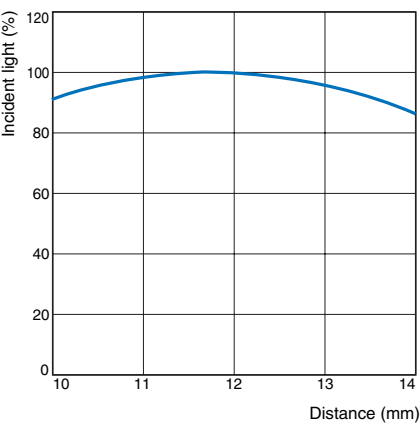


● Angle vs. Incident Characteristics

E3ZM-V□□

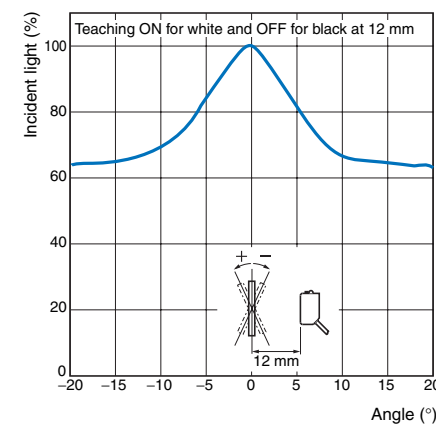


E3ZM-V□□

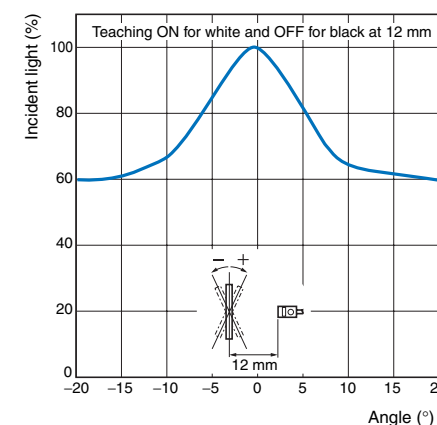


I/O Circuit Diagrams

NPN Output

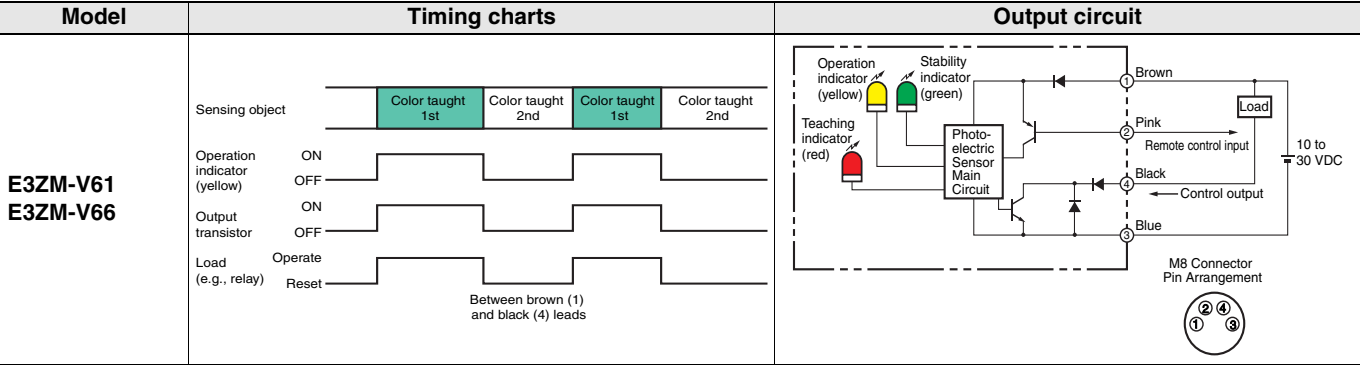


PNP Output

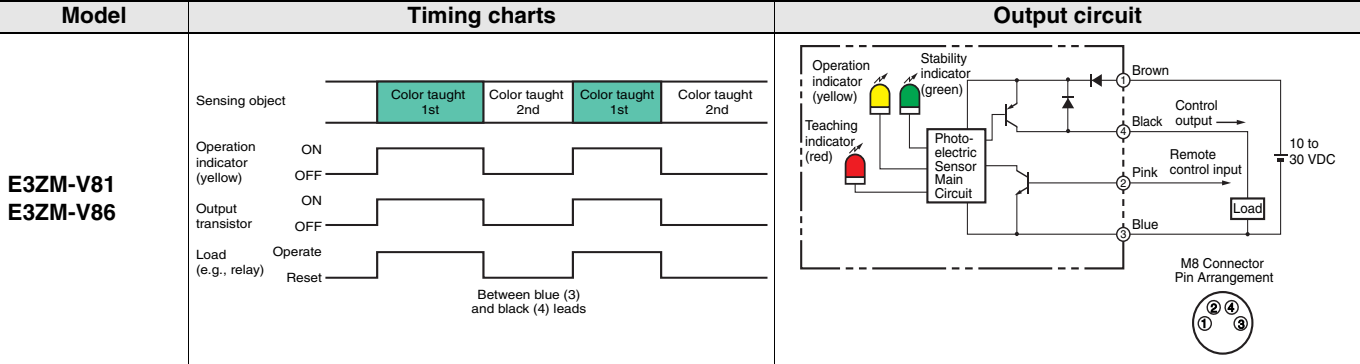

Plugs (Sensor I/O Connectors)

M8 4-pin Connectors

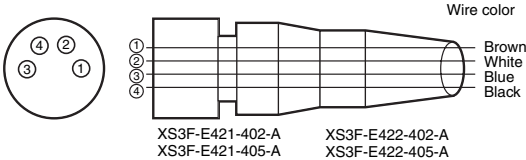


| Classification | Wire color | Connector pin No. | Application          |
|----------------|------------|-------------------|----------------------|
| DC             | Brown      | 1                 | Power supply (+V)    |
|                | White      | 2                 | Remote control input |
|                | Blue       | 3                 | Power supply (0 V)   |
|                | Black      | 4                 | Output               |

**Note:** The above M8 Connectors made by OMRON are IP67.  
Do not use them in an environment where IP69K is required.



## Nomenclature

### Teaching Models

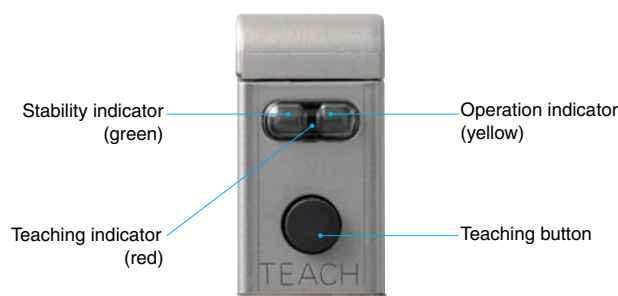

## Safety Precautions

Refer to *Warranty and Limitations of Liability* on page 15.

### WARNING

This product is not designed or rated for directly or indirectly ensuring safety of persons. Do not use it for such a purpose.



### CAUTION

Do not use the product with voltage in excess of the rated voltage. Excess voltage may result in malfunction or fire.



Never use the product with an AC power supply. Otherwise, explosion may result.



When cleaning the product, do not apply a high-pressure spray of water to one part of the product. Otherwise, parts may become damaged and the degree of protection may be degraded.



### Precautions for Safe Use

The following precautions must be observed to ensure safe operation of the Sensor.

#### Operating Environment

Do not use the Sensor in an environment where explosive or flammable gas is present.

#### Connecting Connectors

Be sure to hold the connector cover when inserting or removing the connector.

When using an XS3F Connector, be sure to tighten the connector lock by hand; do not use pliers or other tools. If the tightening is insufficient, the degree of protection will not be maintained and the Sensor may become loose due to vibration. The appropriate tightening torque is 0.3 to 0.4 N·m. When using another, commercially available connector, follow the usage and tightening torque instructions provided by the manufacturer.

#### Load

Do not use a load that exceeds the rated load.

#### Low-temperature Environments

Do not touch the metal surface with your bare hands when the temperature is low. Touching the surface may result in a cold burn.

#### Oily Environments

Do not use the Sensor in oily environments. They may damage parts and reduce the degree of protection.

#### Modifications

Do not attempt to disassemble, repair, or modify the Sensor.

#### Outdoor Use

Do not use the Sensor in locations subject to direct sunlight.

#### Cleaning

Do not use thinner, alcohol, or other organic solvents. Otherwise, the optical properties and degree of protection may be degraded.

#### Cleaning

Do not use highly concentrated cleaning agents. Otherwise, malfunction may result. Also, do not use high-pressure water with a level of pressure that exceeds the stipulated level. Otherwise, the degree of protection may be reduced.

#### Surface Temperature

Burn injury may occur. The Sensor surface temperature rises depending on application conditions, such as the ambient temperature and the power supply voltage. Use caution when operating or performing maintenance on the Sensor.

#### Cable Bending

Do not bend the cable in temperatures of  $-25^{\circ}\text{C}$  or below. Otherwise, the cable may be damaged.

Precautions for Correct Use

Do not use the Sensor in any atmosphere or environment that exceeds the ratings.

Do not install the Sensor in the following locations.

- (1)Locations subject to direct sunlight
- (2)Locations subject to condensation due to high humidity
- (3)Locations subject to corrosive gas
- (4)Locations where the Sensor may receive direct vibration or shock

Connecting and Mounting

- (1)The maximum power supply voltage is 30 VDC. Before turning the power ON, make sure that the power supply voltage does not exceed the maximum voltage.
- (2)Laying Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in malfunction or damage due to induction. As a general rule, wire the Sensor in a separate conduit or use shielded cable.
- (3)Use an extension cable with a minimum thickness of 0.3 mm<sup>2</sup> and less than 50 m long.
- (4)Do not pull on the cable with excessive force.
- (5)Pounding the Photoelectric Sensor with a hammer or other tool during mounting will impair water resistance. Also, use M3 screws.
- (6)Mount the Sensor either using the bracket (sold separately) or on a flat surface.
- (7)Be sure to turn OFF the power supply before inserting or removing the connector.

Power Supply

If a commercial switching regulator is used, ground the FG (frame ground) terminal.

Power Supply Reset Time

The Sensor will be able to detect objects 100 ms after the power supply is tuned ON. Start using the Sensor 100 ms or more after turning ON the power supply. If the load and the Sensor are connected to separate power supplies, be sure to turn ON the Sensor first.

Turning OFF the Power Supply

Output pulses may be generated even when the power supply is OFF.

Therefore, it is recommended to first turn OFF the power supply for the load or the load line.

Load Short-circuit Protection


This Sensor is equipped with load short-circuit protection, but be sure to not short circuit the load. Be sure to not use an output current flow that exceeds the rated current. If a load short circuit occurs, the output will turn OFF, so check the wiring before turning ON the power supply again. The short-circuit protection circuit will be reset. The load shortcircuit protection will operate when the current flow reaches 1.8 times the rated load current. When using a capacitive load, use an inrush current of 1.8 times the rated load current or lower.

Water Resistance

Do not use the Sensor in water, rainfall, or outdoors.

When disposing of the Sensor, treat it as industrial waste.

Mounting Diagram

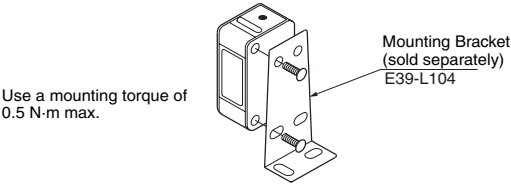

Resistance to Detergents, Disinfectants, and Chemicals

- The Sensor will maintain sufficient performance in typical detergents and disinfectants, but performance may suffer in some types of detergents, disinfectants, and chemicals. Refer to the following table prior to use.
- The E3ZM has passed detergent and disinfectant resistance testing for the substances listed in the following table. Use this table as a guide when considering detergents and disinfectants.

| Type                          | Product name                                     | Con-<br>centra-<br>tion | Tem-<br>pera-<br>ture | Time  |
|-------------------------------|--|-------------------------|-----------------------|-------|
| Chemicals                     | Sodium hydroxide, NaOH                           | 1.5%                    | 70°C                  | 240 h |
|                               | Potassium hydroxide, KOH                         | 1.5%                    | 70°C                  | 240 h |
|                               | Phosphoric acid, H <sub>3</sub> PO <sub>4</sub>  | 2.5%                    | 70°C                  | 240 h |
|                               | Sodium hypochlorite, NaClO                       | 0.3%                    | 25°C                  | 240 h |
|                               | Hydrogen peroxide, H <sub>2</sub> O <sub>2</sub> | 6.5%                    | 25°C                  | 240 h |
| Alkaline foaming<br>cleansers | Topax 66s (Ecolab)                               | 3.0%                    | 70°C                  | 240 h |
| Acidic foaming<br>cleansers   | Topax 56 (Ecolab)                                | 5.0%                    | 70°C                  | 240 h |
| Disinfectants                 | Oxonia Active 90 (Ecolab)                        | 1.0%                    | 25°C                  | 240 h |
|                               | TEK121 (ABC Compounding)                         | 1.1%                    | 25°C                  | 240 h |


**Note:** The Sensor was immersed in the above chemicals, detergents, and disinfectants for 240 h at the temperatures given, and then passed an insulation resistance test at 100 MΩ min.

Restrictions on Sensing Objects

Do not use this Sensor if the color and pattern of the background are similar to those of the mark.


Detection of Glossy Objects

Mount the Sensor at an angle of 5° to 15°, as shown in the following diagram. This will improve the mark detection capability.

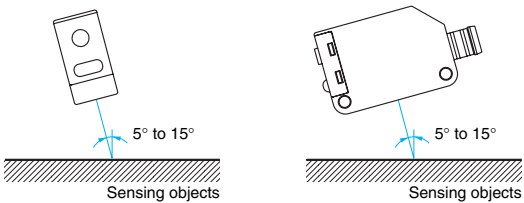

Operating Procedure


Two-point Teaching Using Teaching Button

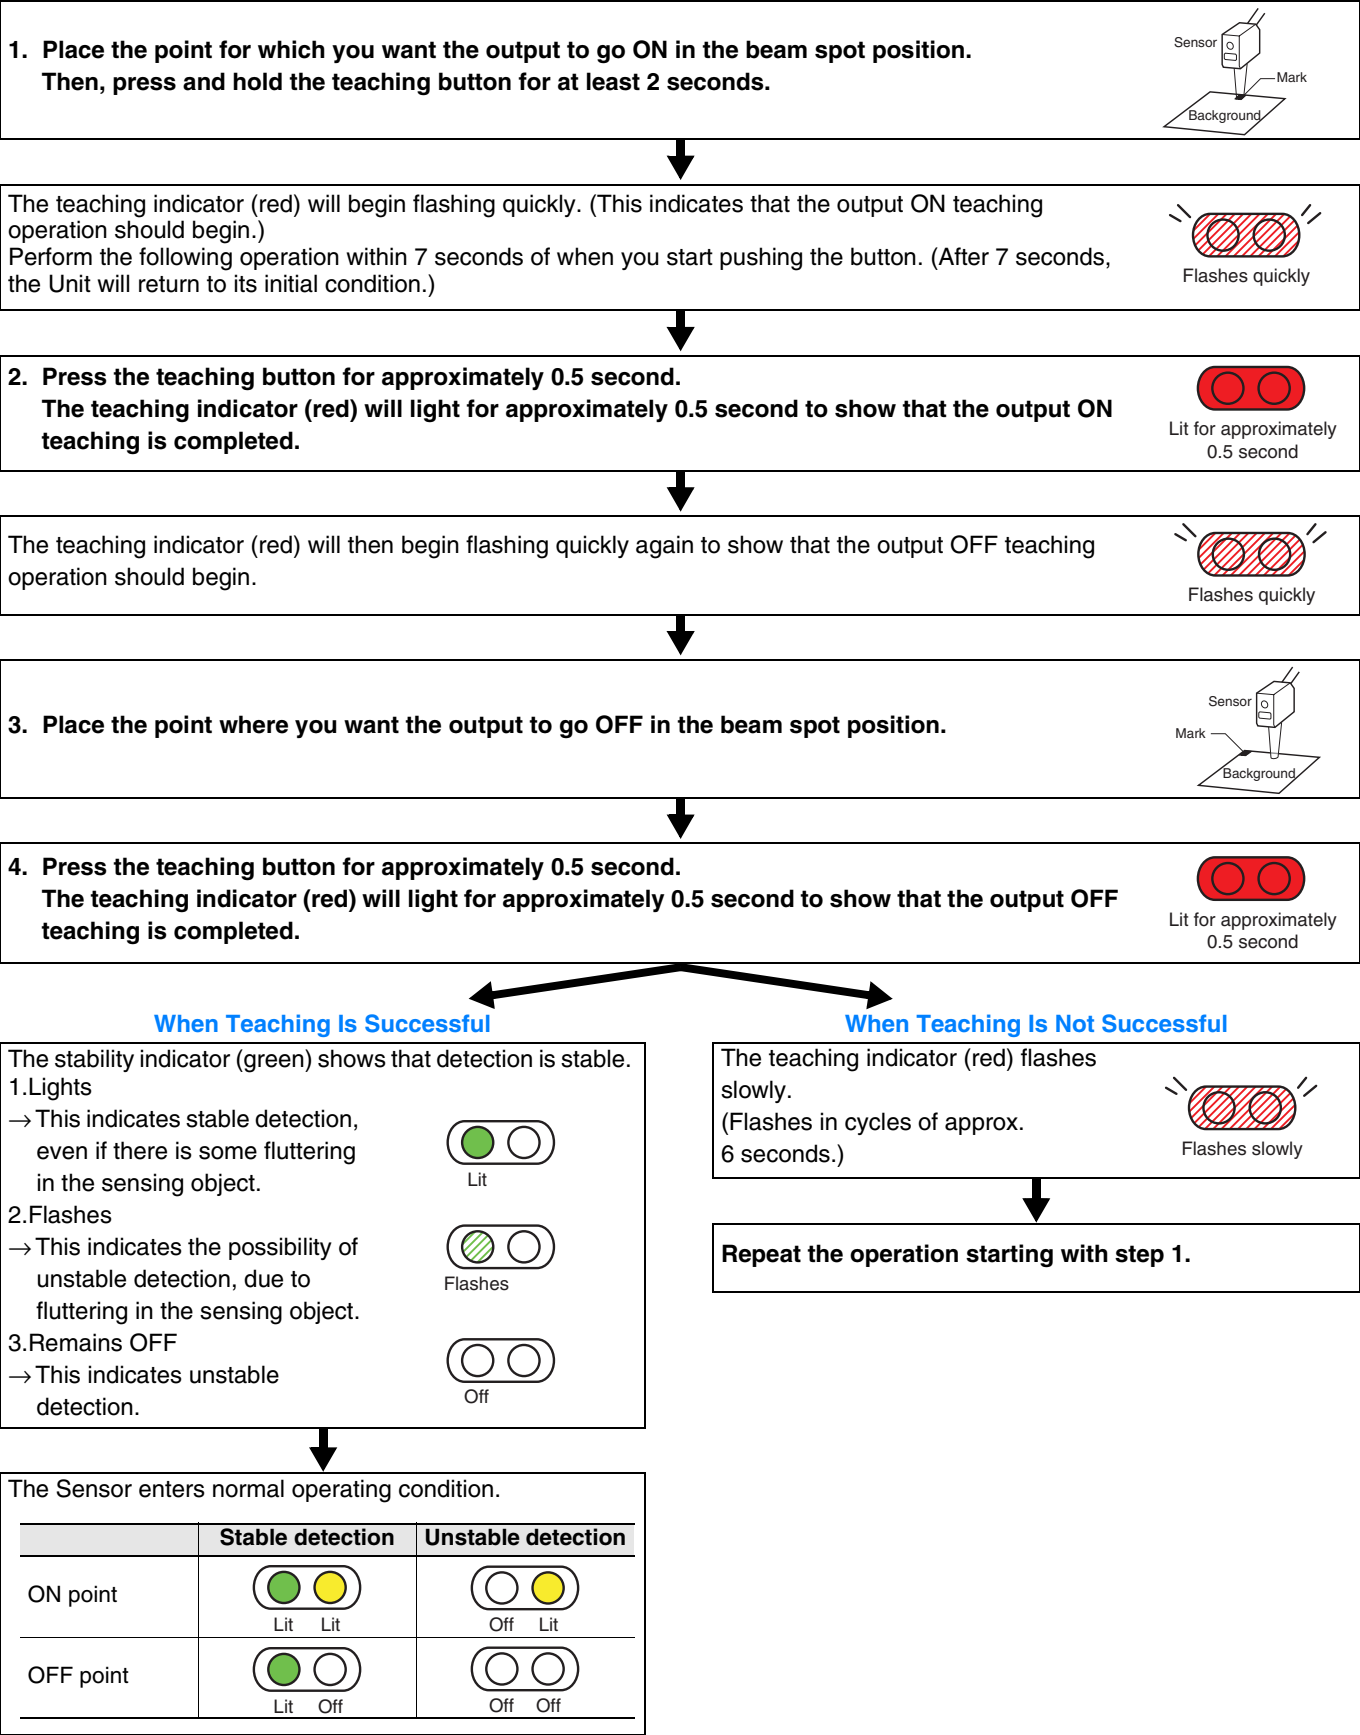

## Automatic teaching (Remote)

1. Send a pulse with a duration of at least 2 s but less than 10 s min. to the remote control input (pink).
2. Teaching will be performed automatically when the mark (the light level with the shorter detection time) passes through the beam spot.
  - Make sure the mark passes through the beam spot for at least 1.5 ms.
  - Pass the mark through the beam spot at least seven times to complete the teaching process.
  - There must be a difference in light intensity between the mark and the background for teaching to be successful.
3. Detection will begin and the output will turn ON when the mark (the light level with the shorter detection time) is detected.

**Note:** Determine when teaching has been completed by confirming that the output turns ON for the mark and OFF for the background. If the output does not turn ON for the mark and OFF for the background within one minute after the remote control input is applied, teaching has not been successful. Apply the remote control input again.

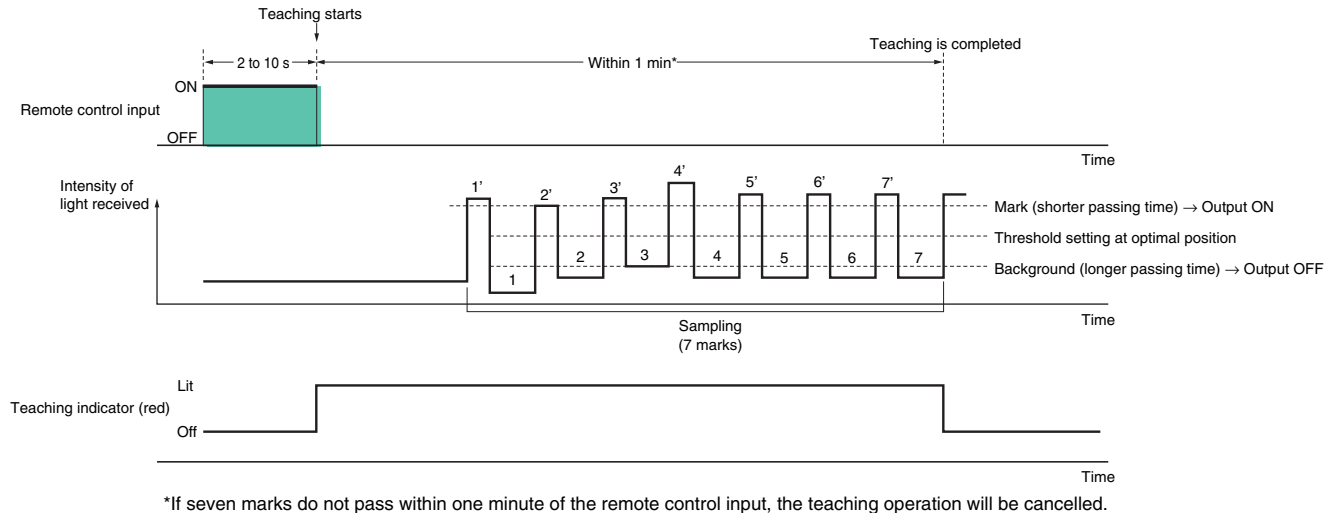


### Precautions for Using Automatic Teaching (Remote)

- With automatic teaching (remote), the output is always turned ON for the light level with the shorter detection time. Use 2-point teaching (manual) to turn OFF the output for the light level with the shorter detection time.
- Faulty detection is possible when using automatic teaching (remote) if there is considerable movement in the sensing object or if the surface of the object is stepped or contains protrusions. In cases such as these, use 2-point teaching.
- Do not use automatic teaching for backgrounds that are not monochrome.


Dimensions

Sensors

Mark Sensor  
(Diffuse reflective)  
Pre-wired Models  
E3ZM-V61  
E3ZM-V81

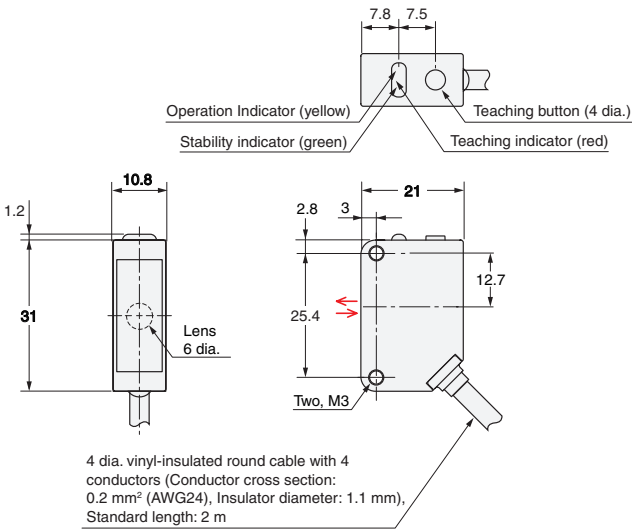

Mark Sensor  
(Diffuse reflective)  
M8 Connector  
E3ZM-V66  
E3ZM-V86

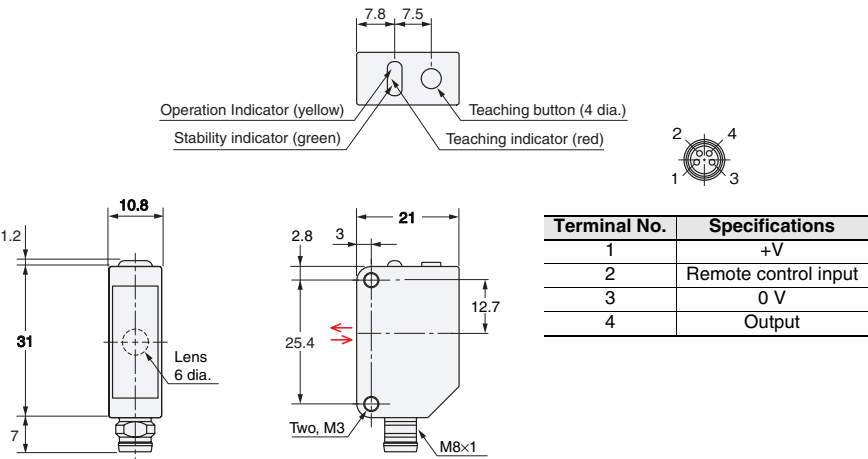

# E3ZM-V

## Introducing the E3ZM Series

E3ZM Standard Models (E3ZM-T/-R/-D/-LS) Ideal for the Food Industry, and Models for PET Bottle Detection (E3ZM-B).

## Ratings and Specifications

| Sensing method                                   |            | Through-beam  |                        | Retro-reflective with MSR function  | Diffuse-reflective Models         |
|--|------------|---|------------------------|---|-----------------------------------|
| Model  | NPN output | E3ZM-T61<br>E3ZM-T66  | E3ZM-T63<br>E3ZM-T68   | E3ZM-R61<br>E3ZM-R66  | E3ZM-D62<br>E3ZM-D67              |
| Item   | PNP output | E3ZM-T81<br>E3ZM-T86  | E3ZM-T83<br>E3ZM-T88   | E3ZM-R81<br>E3ZM-R86  | E3ZM-D82<br>E3ZM-D87              |
| Sensing distance                                 |            | 15 m  | 0.8 m                  | 4 m [100 mm] * (Using E39-R1S)<br>3 m [100 mm] * (Using E39-R1)   | 1 m<br>(White paper 300 X 300 mm) |
| Spot diameter                                    |            | ---   |                        |   |                                   |
| Standard sensing object                          |            | Opaque: 12-mm dia. min.   | Opaque: 2-mm dia. min. | Opaque: 75-mm dia. min.   | ---                               |
| Differential travel                              |            | ---   |                        |   | 20% of sensing distance max.      |
| Reflectivity characteristics (black/white error) |            | ---   |                        |   |                                   |
| Directional angle                                |            | Emitter, Receiver: 3° to 15°  |                        | Sensor: 3° to 10°<br>Reflector: 30°   | ---                               |
| Light source (wavelength)                        |            | Infrared LED (870 nm)   |                        | Red LED (660 nm)  | Infrared LED (860 nm)             |
| Power supply voltage                             |            | 10 to 30 VDC, including 10% ripple (p-p)  |                        |   |                                   |
| Current consumption                              |            | 40 mA max. (Emitter, Receiver: 20 mA max. each)   |                        | 25 mA max.  |                                   |
| Control output                                   |            | Load power supply voltage: 30 VDC max., Load current: 100 mA max. (Residual voltage: 2 V max.)<br>Open-collector output (NPN/PNP output depending on model)<br>Light-ON/Dark-ON switch selectable |                        |   |                                   |
| Protection circuits                              |            | Reversed power supply polarity protection, Output short-circuit protection, and Reversed output polarity protection   |                        | Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection |                                   |
| Response time                                    |            | Operate or reset: 1 ms max.   |                        |   |                                   |
| Sensitivity adjustment                           |            | One-turn adjuster   |                        |   |                                   |
| Ambient illumination                             |            | (Receiver side) Incandescent lamp: 3,000 lx max., Sunlight: 10,000 lx max.  |                        |   |                                   |
| Ambient temperature range                        |            | Operating: -25°C to 55°C, Storage: -40°C to 70°C (with no icing or condensation)  |                        |   |                                   |

\* Values in brackets are the minimum required distance between the Sensor and Reflector.

| Sensing method                                   |            | BGS Reflective Models   |  |  | Models for PET Bottle Detection Retro-reflective (P-opaque and MSR Function) |
|--|------------|---|--|--|--|
| Model  | NPN output | E3ZM-LS61H<br>E3ZM-LS66H  | E3ZM-LS62H<br>E3ZM-LS67H                 | E3ZM-LS64H<br>E3ZM-LS69H                 | E3ZM-B61<br>E3ZM-B66   |
| Item   | PNP output | E3ZM-LS81H<br>E3ZM-LS86H  | E3ZM-LS82H<br>E3ZM-LS87H                 | E3ZM-LS84H<br>E3ZM-LS89H                 | E3ZM-B81<br>E3ZM-B86   |
| Sensing distance                                 |            | 10 to 100 mm (White paper 100 × 100 mm)   | 10 to 150 mm (White paper 100 × 100 mm)  | 10 to 200 mm (White paper 100 × 100 mm)  | 100 to 500 mm<br>(Using E39-RP1)   |
| Spot diameter                                    |            | 4-mm dia. at sensing distance of 100 mm   | 12-mm dia. at sensing distance of 150 mm | 18-mm dia. at sensing distance of 200 mm | ---  |
| Standard sensing object                          |            | ---   |  |  |  |
| Differential travel                              |            | 3% of sensing distance max.   | 15% of sensing distance max.             | 20% of sensing distance max.             | ---  |
| Reflectivity characteristics (black/white error) |            | 5% of sensing distance max.   | 10% of sensing distance max.             | 20% of sensing distance max.             | ---  |
| Directional angle                                |            | ---   |  |  |  |
| Light source (wavelength)                        |            | Red LED (650 nm)  | Red LED (660 nm)                         |  | Red LED (650 nm)   |
| Power supply voltage                             |            | 10 to 30 VDC, including 10% ripple (p-p)  |  |  |  |
| Current consumption/ power consumption           |            | 25 mA max.  |  |  |  |
| Control output                                   |            | Load power supply voltage: 30 VDC max., Load current: 100 mA max. (Residual voltage: 2 V max.)<br>Open-collector output (NPN/PNP output depending on model)<br>Light-ON/Dark-ON cable connection selectable |  |  |  |
| Protection circuits                              |            | Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection   |  |  |  |
| Response time                                    |            | Operate or reset: 1 ms max.   |  |  |  |
| Sensitivity adjustment                           |            | ---   |  |  |  |
| Ambient illumination                             |            | (Receiver side) Incandescent lamp: 3,000 lx max., Sunlight: 10,000 lx max.  |  |  |  |
| Ambient temperature range                        |            | Operating: -25°C to 55°C, Storage: -40°C to 70°C (with no icing or condensation)  |  |  |  |

## **READ AND UNDERSTAND THIS DOCUMENT**

Please read and understand this document before using the products. Please consult your OMRON representative if you have any questions or comments.

## **WARRANTY**

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

## **LIMITATIONS OF LIABILITY**

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## **SUITABILITY FOR USE**

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## **PERFORMANCE DATA**

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

## **CHANGE IN SPECIFICATIONS**

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

## **DIMENSIONS AND WEIGHTS**

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

## **ERRORS AND OMISSIONS**

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

## **PROGRAMMABLE PRODUCTS**

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## **COPYRIGHT AND COPY PERMISSION**

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.





This document provides information mainly for selecting suitable models. Please read the Instruction sheet carefully for information that the user must understand and accept before purchase, including information on warranty, limitations of liability, and precautions.

**OMRON Corporation** Industrial Automation Company  
Tokyo, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

**Regional Headquarters**

**OMRON EUROPE B.V.**

**Sensor Business Unit**

Carl-Benz-Str. 4, D-71154 Nufringen, Germany  
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

**OMRON ELECTRONICS LLC**

One Commerce Drive Schaumburg,  
IL 60173-5302 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON ASIA PACIFIC PTE. LTD.**

No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON (CHINA) CO., LTD.**

Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**Authorized Distributor:**

© OMRON Corporation 2009 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

**CSM\_6\_1\_0317**

**Cat. No. E389-E1-01A**

0308 (0507)