


R88L-EC-FW/GW-□

Accurax linear motor

New linear motors with optimised efficiency

Iron-core motors for high speed and high duty cycle operations and Ironless motors for cogging-free and high dynamic applications. Both motor and families deliver unparalleled accuracy and performance benefits.

- Ironless and iron-core types available
- High dynamic and precise positioning
- Compact and flat design iron-core motors
- Excellent force-to-weight ratio ironless motors
- Weight-optimised magnet track
- Optional digital hall-sensor and connectors
- Temperature sensors included

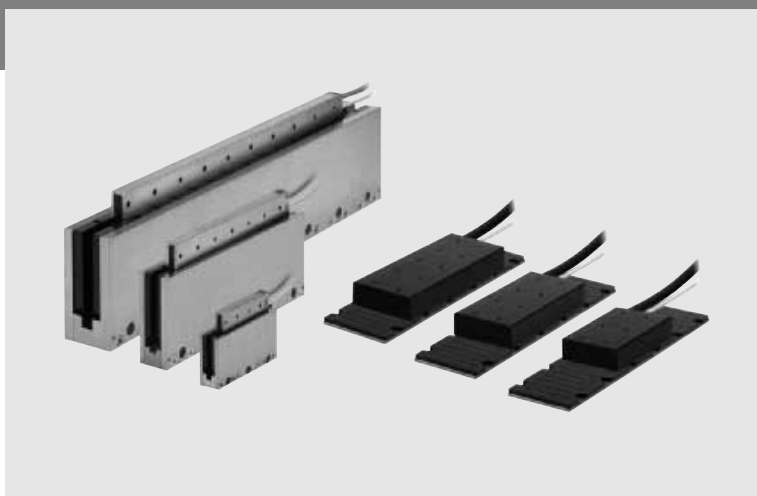


Ratings



- Iron-core motors - 48 to 760 N (2000 N peak force)
- Ironless motor - 26.5 to 348 N (2100 N peak force)

System configuration


(Refer to servo drive chapter)



Accurax G5 servo drive
Analogue/ Pulse and EtherCAT models

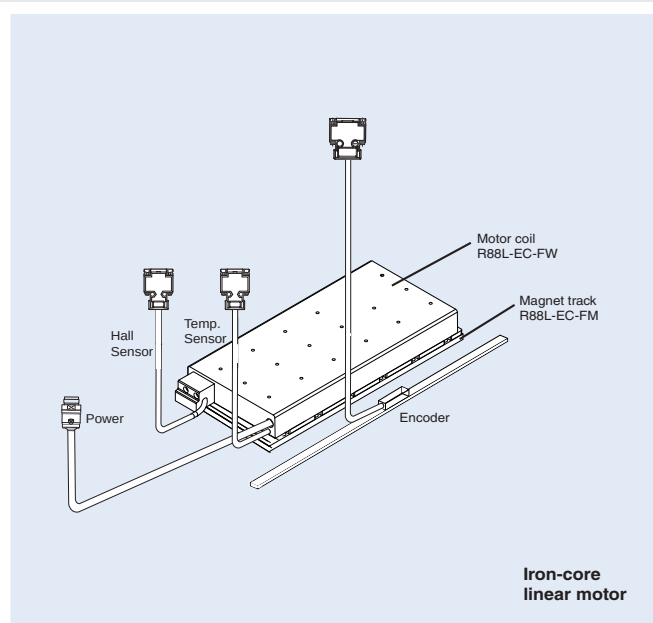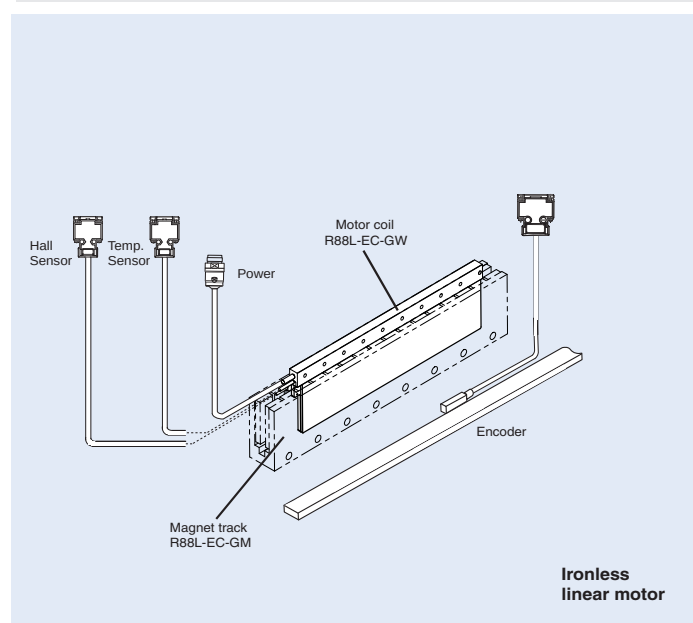


Linear Motor / Servo Drive combination


Linear motor coil				Linear Servo drive				
				Accurax G5 EtherCAT model		Accurax G5 Analog/pulse model		
Type	Rated force	Peak force	Model		230V	400V	230V	400V
R88L-EC-FW-□ Iron-core motors 	48 N	105 N	Coil without connectors	R88L-EC-FW-0303-ANPC	R88D-KN02H-ECT-L	R88D-KN06F-ECT-L	R88D-KT02H-L	R88D-KT06F-L
	96 N	210 N		R88L-EC-FW-0306-ANPC	R88D-KN04H-ECT-L	R88D-KN10F-ECT-L	R88D-KT04H-L	R88D-KT10F-L
	160 N	400 N		R88L-EC-FW-0606-ANPC	R88D-KN08H-ECT-L	R88D-KN15F-ECT-L	R88D-KT08H-L	R88D-KT15F-L
	240 N	600 N		R88L-EC-FW-0609-ANPC	R88D-KN10H-ECT-L	R88D-KN20F-ECT-L	R88D-KT10H-L	R88D-KT20F-L
	320 N	800 N		R88L-EC-FW-0612-ANPC	R88D-KN15H-ECT-L	R88D-KN30F-ECT-L	R88D-KT15H-L	R88D-KT30F-L
	608 N	1600 N		R88L-EC-FW-1112-ANPC	R88D-KN15H-ECT-L	R88D-KN30F-ECT-L	R88D-KT15H-L	R88D-KT30F-L
	760 N	2000 N		R88L-EC-FW-1115-ANPC	R88D-KN15H-ECT-L	R88D-KN30F-ECT-L	R88D-KT15H-L	R88D-KT30F-L
	48 N	105 N	Coil with connectors	R88L-EC-FW-0303-APLC	R88D-KN02H-ECT-L	R88D-KN06F-ECT-L	R88D-KT02H-L	R88D-KT06F-L
	96 N	210 N		R88L-EC-FW-0306-APLC	R88D-KN04H-ECT-L	R88D-KN10F-ECT-L	R88D-KT04H-L	R88D-KT10F-L
	160 N	400 N		R88L-EC-FW-0606-APLC	R88D-KN08H-ECT-L	R88D-KN15F-ECT-L	R88D-KT08H-L	R88D-KT15F-L
	240 N	600 N		R88L-EC-FW-0609-APLC	R88D-KN10H-ECT-L	R88D-KN20F-ECT-L	R88D-KT10H-L	R88D-KT20F-L
	320 N	800 N		R88L-EC-FW-0612-APLC	R88D-KN15H-ECT-L	R88D-KN30F-ECT-L	R88D-KT15H-L	R88D-KT30F-L
	608 N	1600 N		R88L-EC-FW-1112-APLC	R88D-KN15H-ECT-L	R88D-KN30F-ECT-L	R88D-KT15H-L	R88D-KT30F-L
	760 N	2000 N		R88L-EC-FW-1115-APLC	R88D-KN15H-ECT-L	R88D-KN30F-ECT-L	R88D-KT15H-L	R88D-KT30F-L
	R88L-EC-GW-□ Ironless motors 	26.5N	100 N	Coil without connectors	R88L-EC-GW-0303-ANPS	R88D-KN02H-ECT-L	-	R88D-KT02H-L
53 N		200 N	R88L-EC-GW-0306-ANPS		R88D-KN08H-ECT-L	-	R88D-KT08H-L	-
80 N		300 N	R88L-EC-GW-0309-ANPS		R88D-KN10H-ECT-L	-	R88D-KT10H-L	-
58 N		240 N	R88L-EC-GW-0503-ANPS		R88D-KN02H-ECT-L	-	R88D-KT02H-L	-
117 N		480 N	R88L-EC-GW-0506-ANPS		R88D-KN04H-ECT-L	-	R88D-KT04H-L	-
175 N		720 N	R88L-EC-GW-0509-ANPS		R88D-KN08H-ECT-L	-	R88D-KT08H-L	-
117 N		700 N	R88L-EC-GW-0703-ANPS		R88D-KN04H-ECT-L	-	R88D-KT04H-L	-
232 N		1400 N	R88L-EC-GW-0706-ANPS		R88D-KN08H-ECT-L	-	R88D-KT08H-L	-
348 N		2100 N	R88L-EC-GW-0709-ANPS		R88D-KN10H-ECT-L	-	R88D-KT10H-L	-
26.5N		100 N	Coil with connectors	R88L-EC-GW-0303-APLS	R88D-KN02H-ECT-L	-	R88D-KT02H-L	-
53 N		200 N		R88L-EC-GW-0306-APLS	R88D-KN08H-ECT-L	-	R88D-KT08H-L	-
80 N		300 N		R88L-EC-GW-0309-APLS	R88D-KN10H-ECT-L	-	R88D-KT10H-L	-
58 N		240 N		R88L-EC-GW-0503-APLS	R88D-KN02H-ECT-L	-	R88D-KT02H-L	-
117 N		480 N		R88L-EC-GW-0506-APLS	R88D-KN04H-ECT-L	-	R88D-KT04H-L	-
175 N		720 N		R88L-EC-GW-0509-APLS	R88D-KN08H-ECT-L	-	R88D-KT08H-L	-
117 N		700 N		R88L-EC-GW-0703-APLS	R88D-KN04H-ECT-L	-	R88D-KT04H-L	-
232 N		1400 N		R88L-EC-GW-0706-APLS	R88D-KN08H-ECT-L	-	R88D-KT08H-L	-
348 N	2100 N	R88L-EC-GW-0709-APLS		R88D-KN10H-ECT-L	-	R88D-KT10H-L	-	

Type designation


Linear motor coil

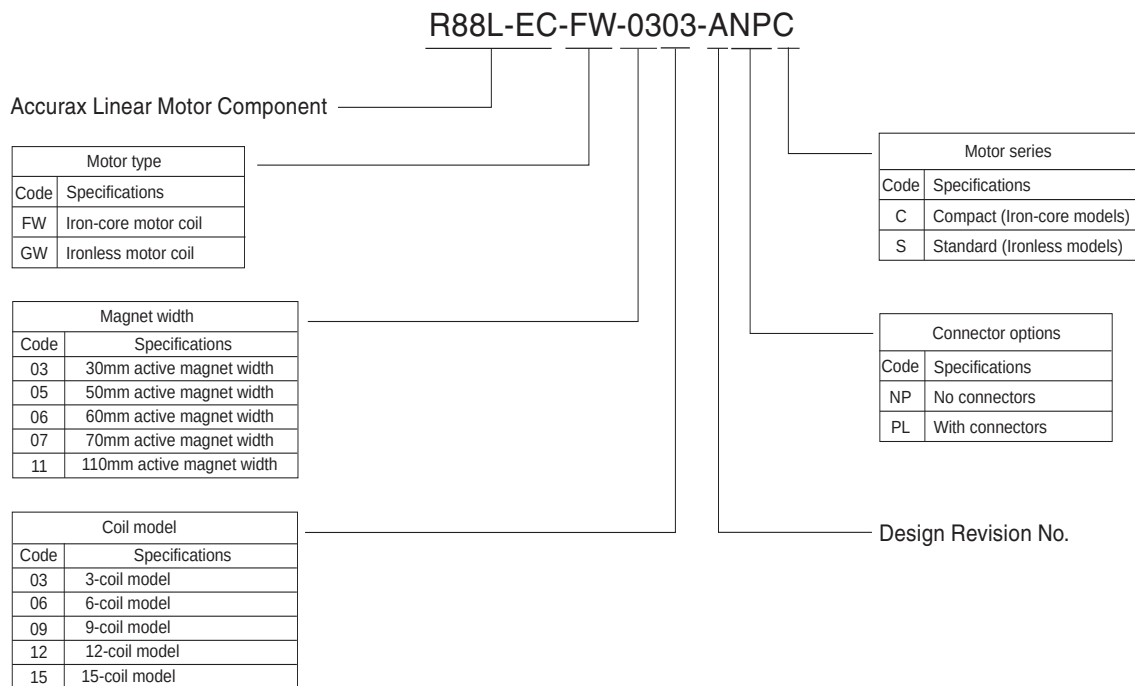

Magnet track

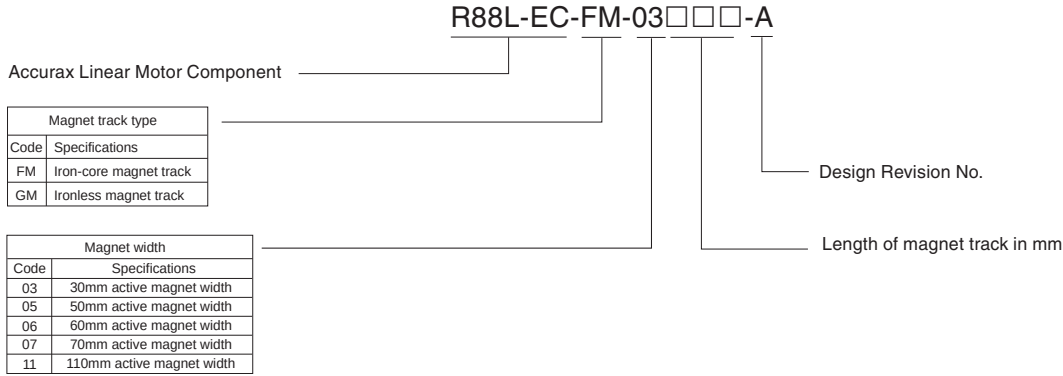

Hall Sensor

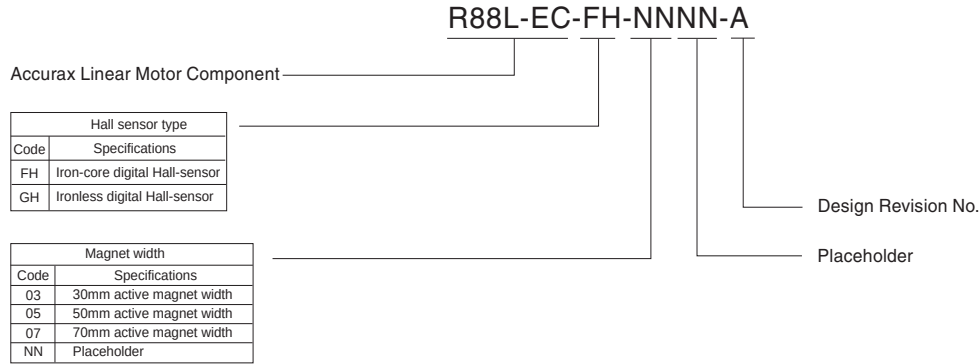

Linear servo motor specifications

Iron-core motors R88L-EC-FW-□ (230/400 VAC)

Voltage		230/400V						
Linear motor model	R88L-EC-FW-□	0303-□	0306-□	0606-□	0609-□	0612-□	1112-□	1115-□
Maximum speed (100V)	m/s	2,5		2			1	
Maximum speed (200V)	m/s	5		4			2	
Maximum speed (400V)	m/s	10		8			4	
Peak force* ¹	N	105	210	400	600	800	1600	2000
Peak current* ¹	Arms	3.1	6.1	10	15	20	20	25
Continuous force* ²	N	48	96	160	240	320	608	760
Continuous current* ²	Arms	1.24	2.4	3.4	5.2	6.9	6.5	8.2
Motor force constant	N / A _{rms}	39.7		46.5			93	
BEMF	VDC/m/s	32		38			76	
Motor constant	N / √W	9.75	13.78	19.49	23.87	27.57	41.47	46.37
Phase resistance	Ω	5.34	2.68	1.83	1.23	0.92	1.6	1.29
Phase Inductance	mH	34.7	17.4	13.7	9.2	6.9	12.8	10.3
Electrical time constant	ms	6,5		7,5			8	
Max. cont. power disipation (all coils)	W	32	63	88	131	175	279	349
Thermal resistance	K/W	2.20	1.10	0.78	0.52	0.39	0.23	0.18
Thermal time constant	s	110		124			126	
Magnetic attraction force	N	300	500	1020	1420	1820	3640	4440
Magnet pole pitch	mm	24						
Weight coil unit* ³	Kg	0.48	0.78	1.31	1.84	2.37	4.45	5.45
Weight magnet track	Kg/m	2.1		3.8			10.5	
Dimension cooling plate (l x w x h)	mm	238 x 220 x10		250 x 287 x 12			371 x 330 x14	
Protection methods* ⁴	Temperature sensors (KTY-83/121 & PTC 110C), self cooling							
Hall sensor	Digital (optional)							
Insulation class	Class B							
Max. bus voltage	560 VDC							
Insulation resistance	500 VDC							
Di-electric strength	2750V for 1sec							
Max. allowable coil temperature	130°C							
Ambient humidity	20 bis to 80% (non-condensing)							
Max. allowable magnet temperature	70°C							

^{*1} Coil temperature rising by 6K/s.








^{*2} Values at 100°C coil temperature and magnets at 25°C. Coil unit must be attached to the given cooling plate sizes in the table and an airstream of 2.5 m/s (25°C) has to be applied.

^{*3} Weight without connector and cable.

^{*4} I²t has to be set properly for high current applications.

All other values at 25°C (+/-10%).

Force-speed characteristics

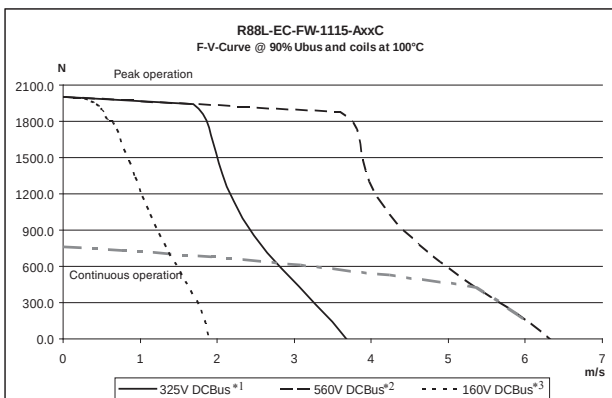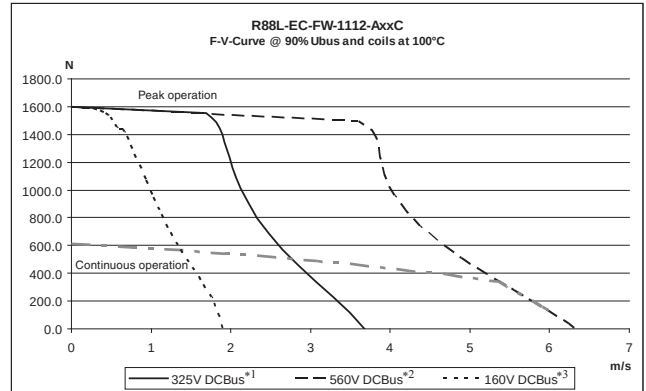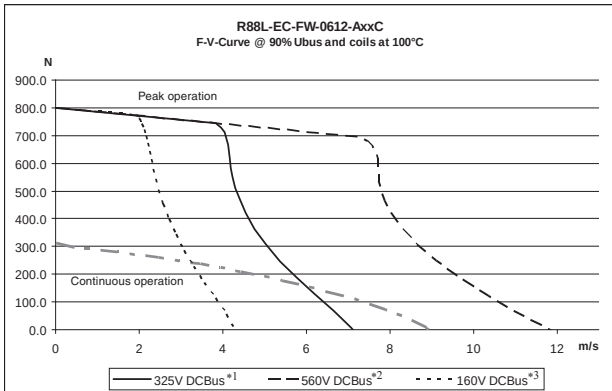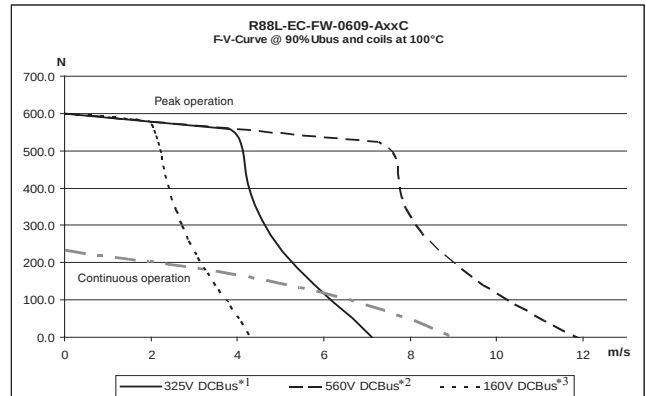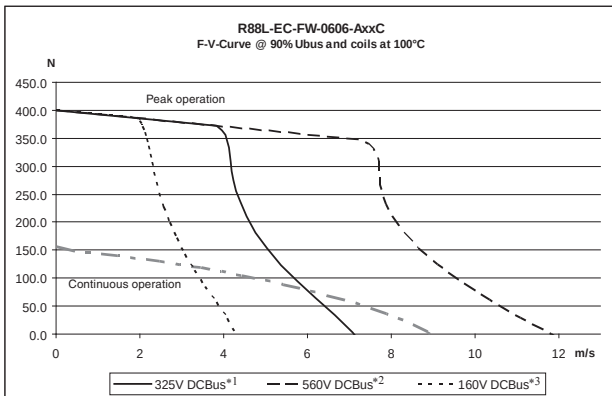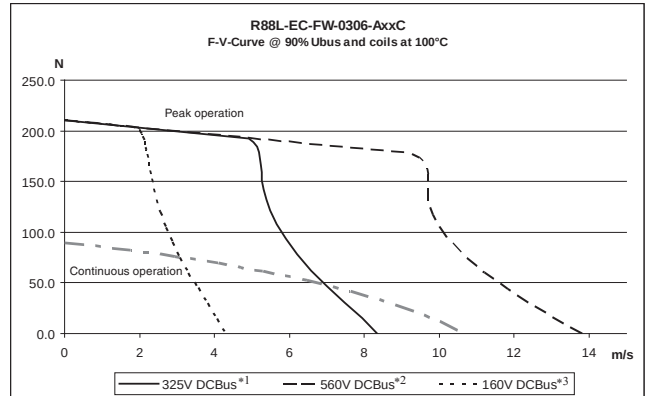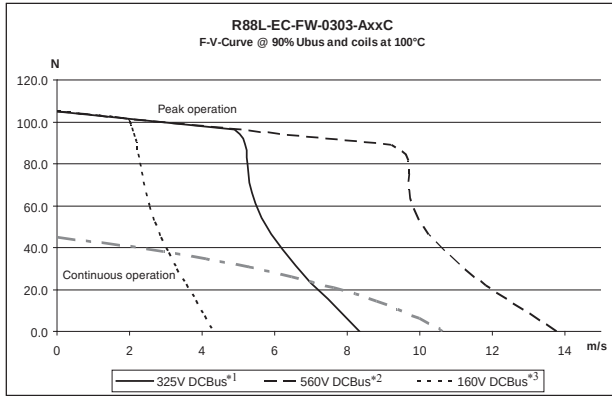

*1 The DCBus voltage corresponds to an AC voltage input (V_{ACIN}) of 235V or more.

*2 The DCBus voltage corresponds to an AC voltage input (V_{ACIN}) of 400V or more.

*3 The DCBus voltage corresponds to an AC voltage input (V_{ACIN}) of 115V or more.

Note: The DCBus value is calculated from the below formula (where is the AV voltage drop in the DC Bus):

$$DCBuS = V_{ACIN} \times \sqrt{2} - \Delta V$$

Ironless motors R88L-EC-GW-□ (230 VAC)

Voltage		230V								
Linear motor model	R88L-EC-GW-□	0303-□	0306-□	0309-□	0503-□	0506-□	0509-□	0703-□	0706-□	0709-□
Maximum speed (100V)	m/s	8			2.2			1.2		
Maximum speed (200V)	m/s	16			4.4			2.4		
Peak force ^{*1}	N	100	200	300	240	480	720	700	1400	2100
Peak current ^{*1}	Arms	5	10	15	3.5	7.1	10.6	5.6	11.3	16.9
Continuous force ^{*2}	N	26.5	53	80	58	117	175	117	232	348
Continuous current ^{*2}	Arms	1.33	2.66	4	0.87	1.76	2.6	0.94	1.87	2.81
Motor force constant	N / A _{rms}	19.9			68			124		
BEMF	VDC/m/s	16			55.5			101		
Motor constant	N / √W	4.9	6.93	8.43	9.85	13.96	17.03	17.97	25.44	31.14
Phase resistance	Ω	5.5	2.8	1.8	15.9	8	5.3	15.8	7.9	5.3
Phase Inductance	mH	1.8	0.9	0.6	13	6.5	4.2	28	14	9
Electrical time constant	ms	0.35			0.8			1.8		
Max. cont. power disipation (all coils)	W	47	95	142	67	134	200	82	165	247
Thermal resistance	K/W	2.1	1.06	0.71	1.7	0.85	0.65	1.56	1.04	0.52
Thermal time constant	s	36			72			96		
Magnetic attraction force	N	0								
Magnet pole pitch	mm	30			42			57		
Weight coil unit ^{*3}	Kg	0.084	0.138	0.198	0.25	0.47	0.69	0.55	0.95	1.35
Weight magnet track	Kg/m	4.8			11.2			24		
Protection methods ^{*4}	Temperature sensors NTC10k, PTC110C, self cooling									
Hall sensor	Digital (optional)									
Insulation class	Class B									
Max. bus voltage	325 VDC									
Insulation resistance	500 VDC									
Di-electric strength	2250V for 1 sec									
Max. allowable coil temperature	110°C									
Ambient humidity	20-80% non-condensing									
Max. allowable magnet temperature	70°C									

^{*1} Coil temperature rising 03-series by 40K/s, 05-series by 20K/s and 07-series by 20K/s.





^{*2} Values at 110°C coil temperature and magnets at 25°C.






^{*3} Weight without connector and cable.

^{*4} I_{2t} has to be set properly for high current overload applications.

All other values at 25°C (+/-10%).

Force-speed characteristics

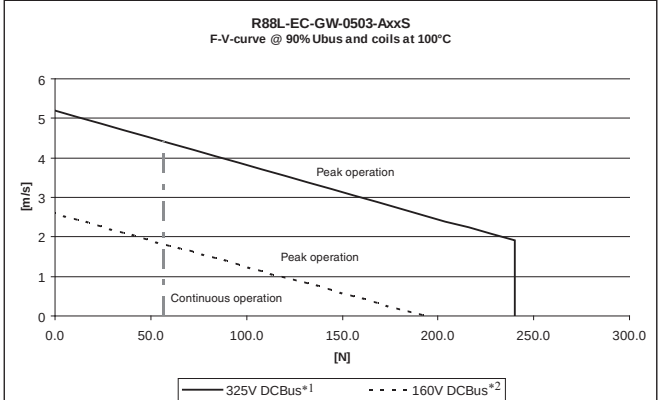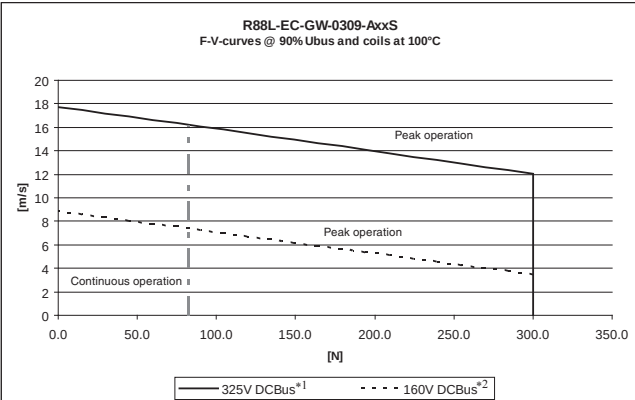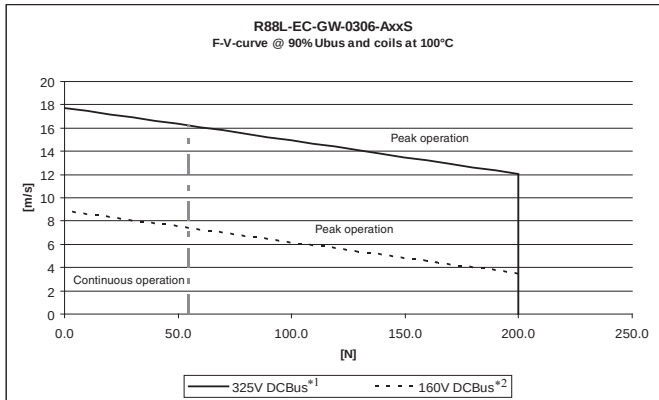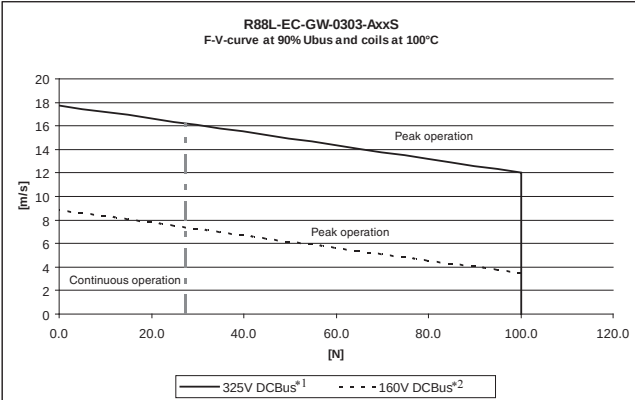

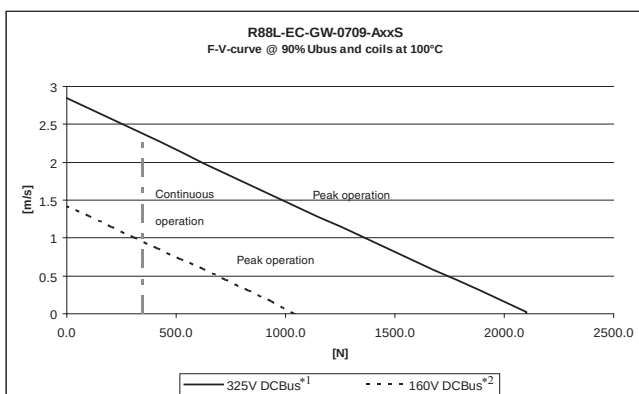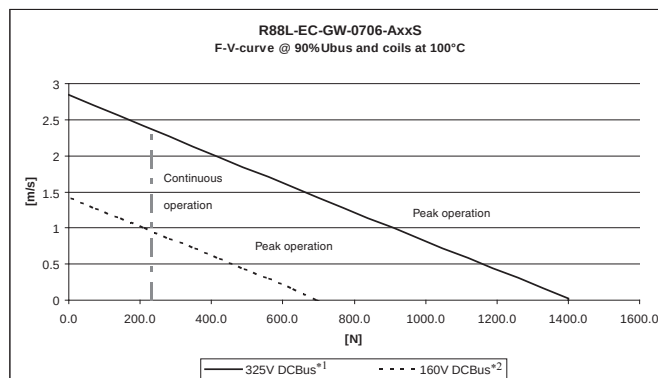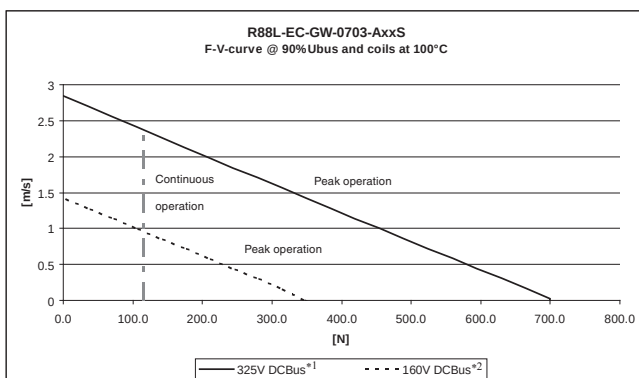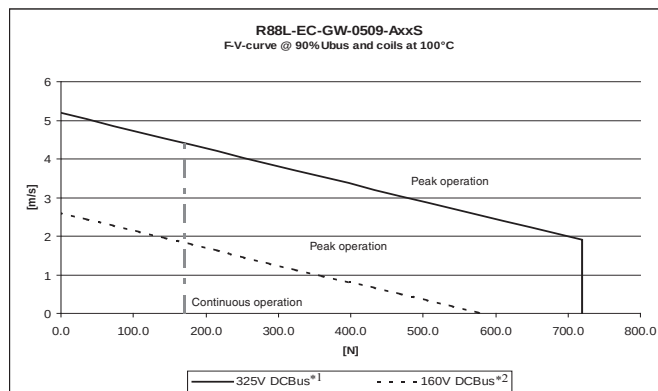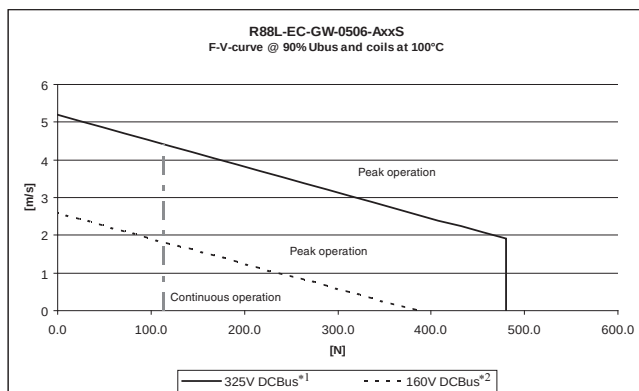

*1 The DCBus voltage corresponds to an AC voltage input (V_{ACIN}) of 235V or more.

*2 The DCBus voltage corresponds to an AC voltage input (V_{ACIN}) of 115V or more.

Note: The DCBus value is calculated from the below formula:

$$DCBus = V_{ACIN} \times \sqrt{2} - \Delta V$$


Dimensions

Iron-core R88L-EC-FW-03□

Motor coil




Model	L1 (mm)	L2 (mm)	n
R88L-EC-FW-0303-□	105 +/-0.5	79 +0.15/-0.35	1
R88L-EC-FW-0306-□	153 +/-0.5	127 +0.15/-0.35	2

Motor coil dimensions with magnet track and hall sensor (optional)

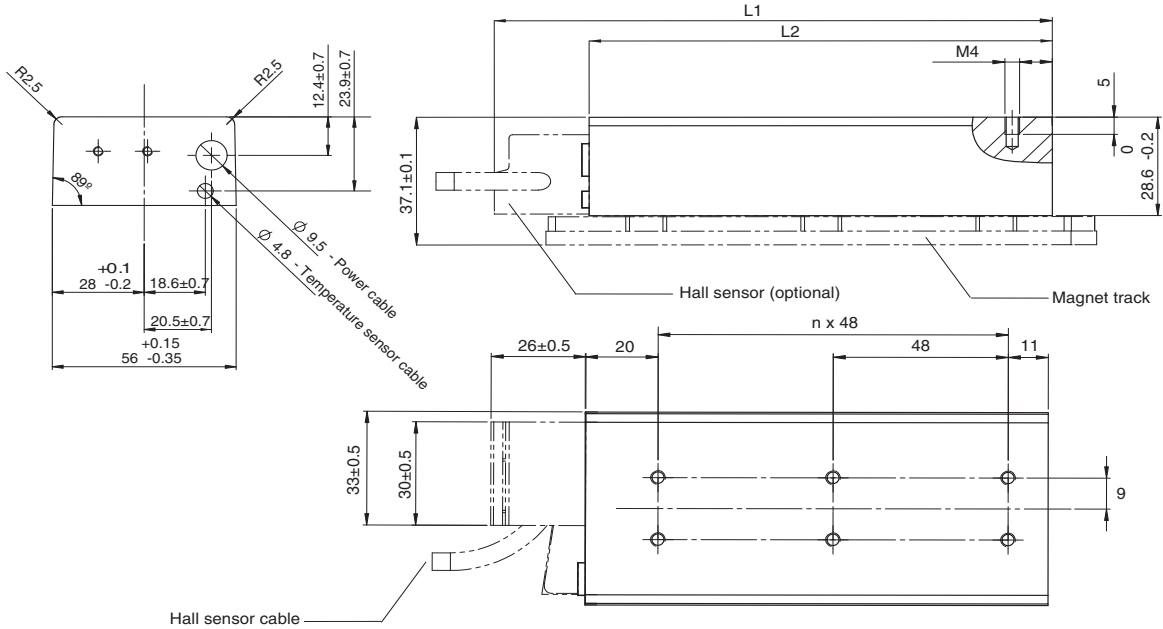


Wiring specifications for motor with connectors

Units: mm



Magnet track

Model	L1 (mm)	n	Approx. weight (Kg/m)
R88L-EC-FM-03096-A	96	1	2.1
R88L-EC-FM-03144-A	144	2	
R88L-EC-FM-03384-A	384	7	

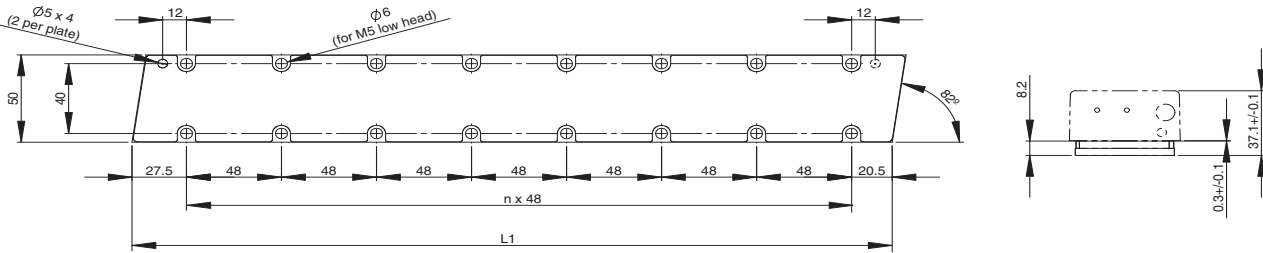


Iron-core R88L-EC-FW-06□

Motor coil

Model	L1 (mm)	L2 (mm)	n
R88L-EC-FW-0606-□	153 +/-0.5	127 +0.15/-0.35	2
R88L-EC-FW-0609-□	201 +/-0.5	175 +0.15/-0.35	3
R88L-EC-FW-0612-□	249 +/-0.5	223 +0.15/-0.35	4

Motor coil dimensions with magnet track and hall sensor (optional)

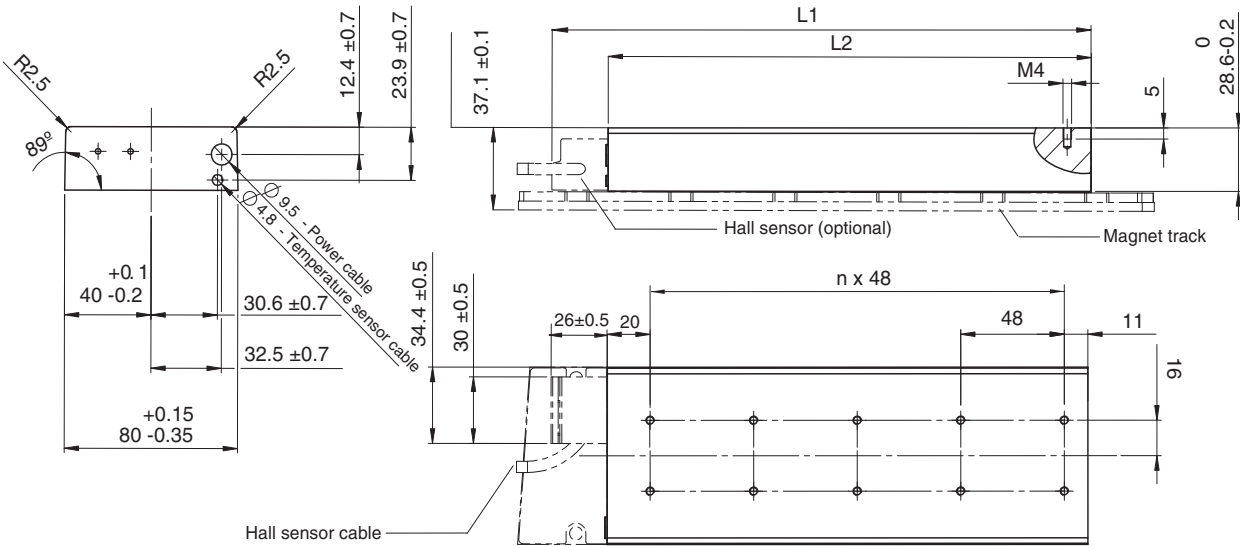

Wiring specifications for motor with connectors

Units: mm

Cable length 500±30
Connector optional
Made by Hypertac
LRR06AMRPN182 (MALE)
Pin article code: 021.279.1020

Power connector		
Pin No.	Wire	Function
1	Black-1	Phase U
2	Black-2	Phase V
3	Green/Yellow	Ground
4	Black-3	Phase W
5	Not used	-
6	Not used	-

Mating connector:
Plug type: LPRA06BFRBN170

Cable length 500±30
Connector optional
D-Sub 9-pin (MALE)


Temperature sensor connector		
Pin No.	Wire	Function
1	Not used	-
2	Not used	-
3	Not used	-
4	Not used	-
5	Not used	-
6	White	PTC
7	Brown	PTC
8	Green	KTY
9	Yellow	KTY
Case	Shield	-

Cable length 500±30
D-Sub 9-pin (MALE)

Hall sensor connector (optional)		
Pin No.	Wire	Function
1	Brown	5V
2	Grey	Hall U
3	Red	Hall V
4	Yellow	Hall W
5	White	GND
6	Not used	Not used
7	Not used	Not used
8	Not used	Not used
9	Not used	Not used
Case	Shield	-

Magnet track

Model	L1 (mm)	n	Approx. weight (Kg/m)
R88L-EC-FM-06192-A	192	3	3.8
R88L-EC-FM-06288-A	288	5	

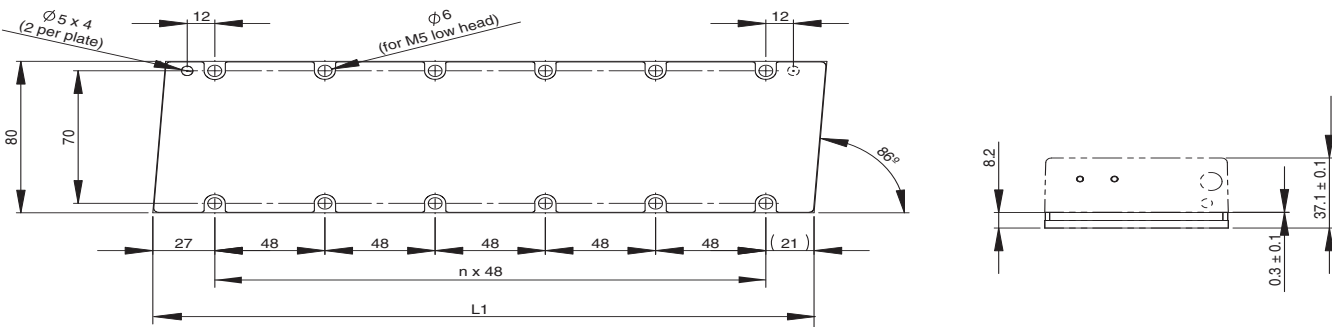


Iron-core R88L-EC-FW-11 ☐

Motor coil

Model	L1 (mm)	L2 (mm)	n
R88L-EC-FW-1112-□	249 +/-0.5	223 +0.15/-0.35	4
R88L-EC-FW-1115-□	297 +/-0.5	271 +0.15/-0.35	5

Motor coil dimensions with magnet track and hall sensor (optional)

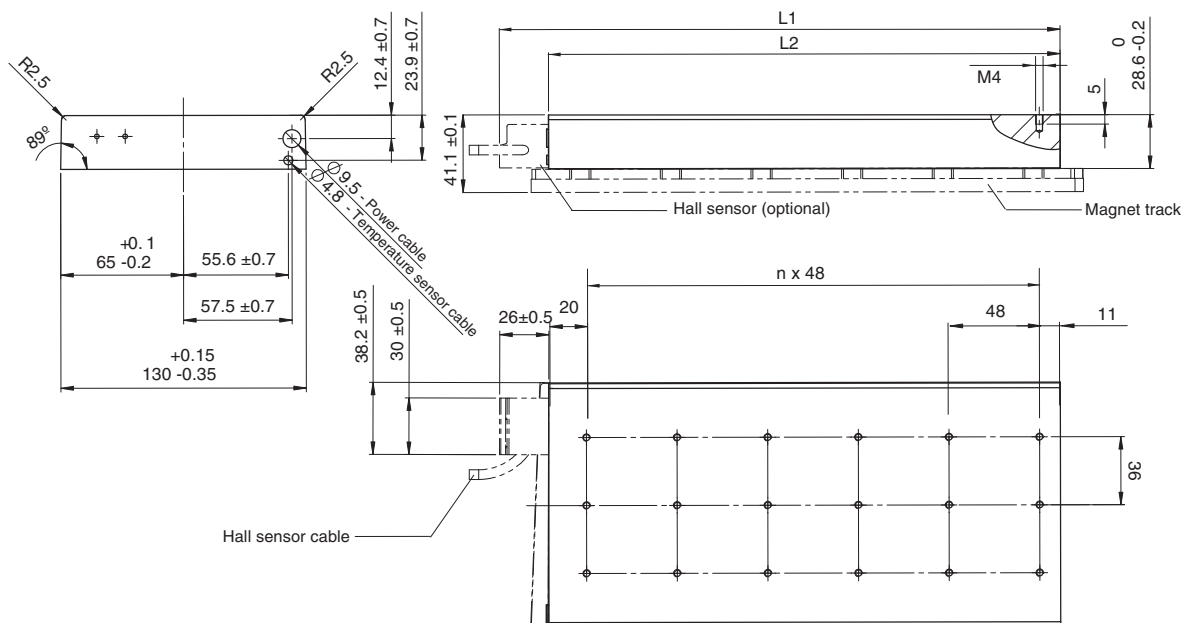

Wiring specifications for motor with connectors


Units: mm



Cable length 500±30
Connector optional
Made by Hypertac
LRR06AMRPN182 (MALE)
Pin article code: 021.279.1020


Power connector		
Pin No.	Wire	Function
1	Black-1	Phase U
2	Black-2	Phase V
3	Green/Yellow	Ground
4	Black-3	Phase W
5	Not used	-
6	Not used	-

Mating connector:
Plug type: LPRA06BFRBN170



Cable length 500±30
Connector optional
D-Sub 9-pin (MALE)

Temperature sensor connector		
Pin No.	Wire	Function
1	Not used	-
2	Not used	-
3	Not used	-
4	Not used	-
5	Not used	-
6	White	PTC
7	Brown	PTC
8	Green	KTY
9	Yellow	KTY
Case	Shield	-




Cable length 500±30
D-Sub 9-pin (MALE)

Hall sensor connector (optional)		
Pin No.	Wire	Function
1	Brown	5V
2	Grey	Hall U
3	Red	Hall V
4	Yellow	Hall W
5	White	GND
6	Not used	Not used
7	Not used	Not used
8	Not used	Not used
9	Not used	Not used
Case	Shield	-

Magnet track


Model	L1 (mm)	n	Approx. weight (Kg/m)
R88L-EC-FM-11192-A	192	3	10.5
R88L-EC-FM-11288-A	288	5	

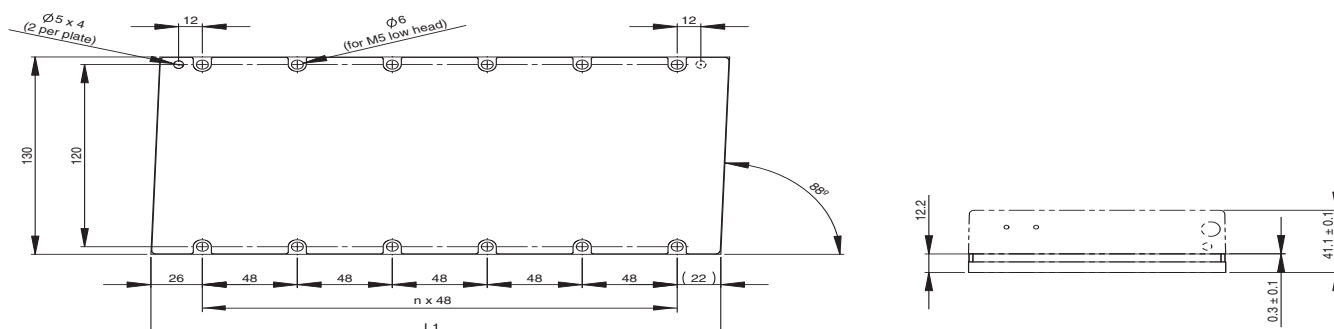

Ironless R88L-EC-GW-03

Motor coil


Model	L1 (mm)	L2 (mm)	n
R88L-EC-GW-0303	95.4	78	3
R88L-EC-GW-0306	155.4	138	6
R88L-EC-GW-0309	215.4	198	9

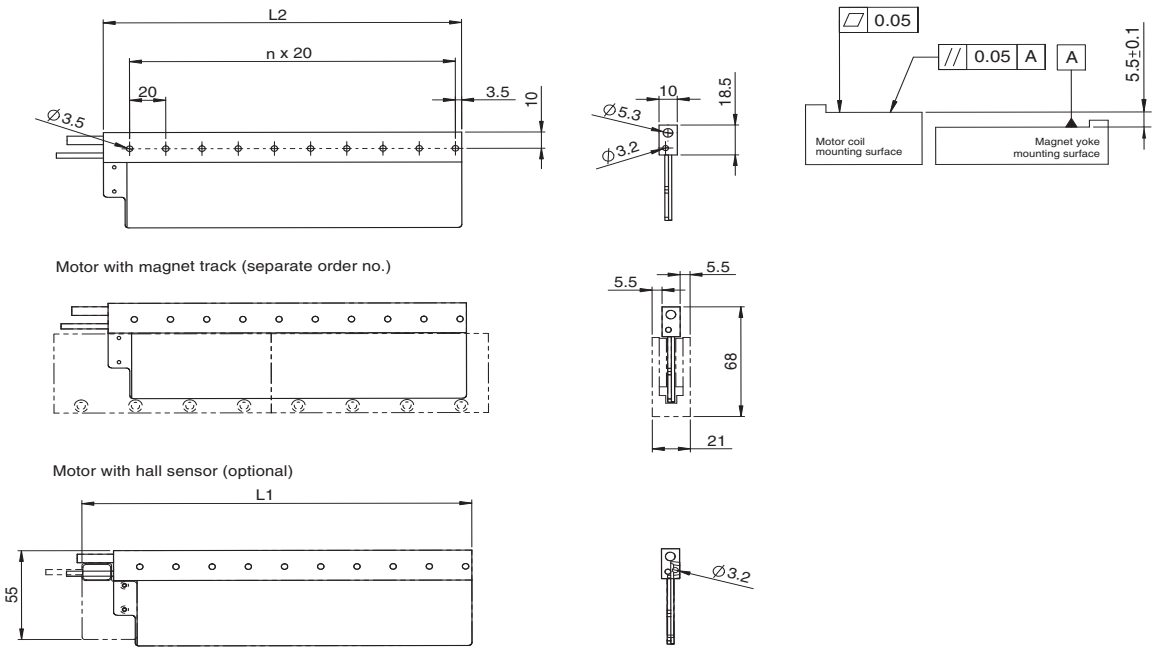

Motor with magnet track (separate order no.)


Motor with hall sensor (optional)

Wiring specifications for motor with connectors




Power connector		
Pin No.	Wire	Function
1	Black-1	Phase U
2	Black-2	Phase V
3	Black-3	Phase W
4	Not used	-
5	Not used	-
6	Green/Yellow	Ground

Mating connector:
Plug type: SPOC06KFSDN169



Temperature sensor connector		
Pin No.	Wire	Function
1	Not used	-
2	Not used	-
3	Not used	-
4	Not used	-
5	Not used	-
6	White	PTC
7	Brown	PTC
8	Green	NTC
9	Yellow	NTC
Case	Shield	-


Units: mm



Hall sensor connector (optional)		
Pin No.	Wire	Function
1	Brown	5V
2	Grey	Hall U
3	Red	Hall V
4	Yellow	Hall W
5	White	GND
6	Not used	Not used
7	Not used	Not used
8	Not used	Not used
9	Not used	Not used
Case	Shield	-

Magnet track


Model	L1 (mm)	n	Approx. weight (Kg/m)
R88L-EC-GM-03090-A	90	2	4.8
R88L-EC-GM-03120-A	120	3	
R88L-EC-GM-03390-A	390	12	

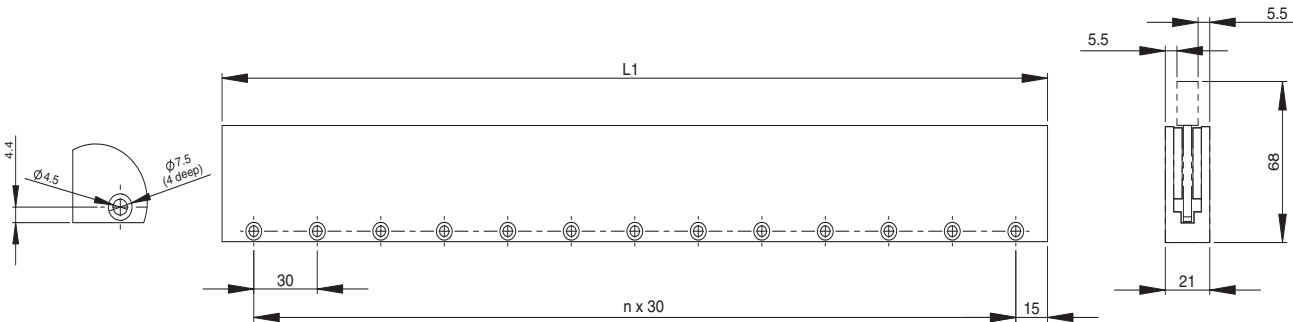


Ironless R88L-EC-GW-05□

Motor coil


Model	L1 (mm)	L2 (mm)	n
R88L-EC-GW-0503-□	123.4	106	3
R88L-EC-GW-0506-□	207.4	190	6
R88L-EC-GW-0509-□	291.4	274	9

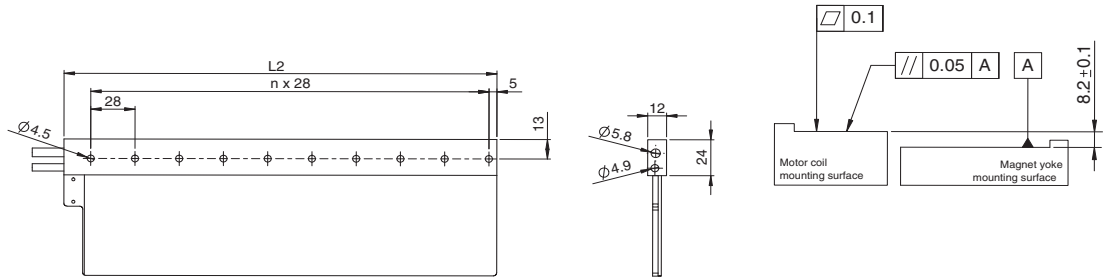


Motor with magnet track (separate order no.)

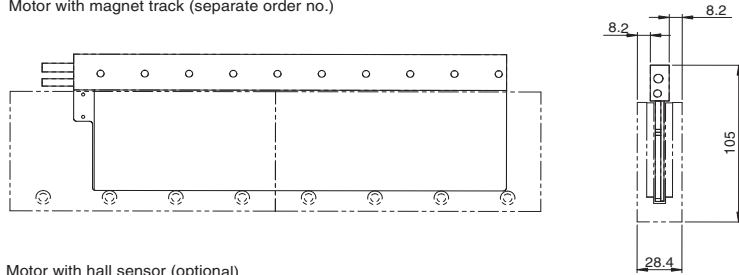

Motor with hall sensor (optional)

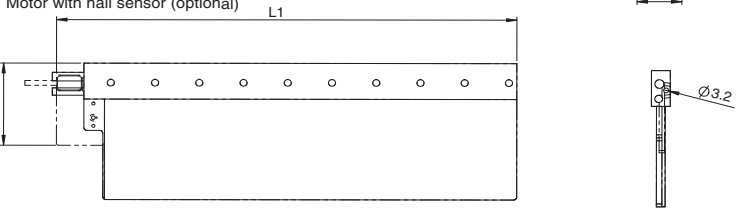


Wiring specifications for motor with connectors




Pin No.	Wire	Function
1	Black-1	Phase U
2	Black-2	Phase V
3	Black-3	Phase W
4	Not used	-
5	Not used	-
6	Green/Yellow	Ground

Mating connector:
Plug type: SPOC06KFSN169



Pin No.	Wire	Function
1	Not used	-
2	Not used	-
3	Not used	-
4	Not used	-
5	Not used	-
6	White	PTC
7	Brown	PTC
8	Green	NTC
9	Yellow	NTC
Case	Shield	-


Units: mm



Pin No.	Wire	Function
1	Brown	5V
2	Grey	Hall U
3	Red	Hall V
4	Yellow	Hall W
5	White	GND
6	Not used	Not used
7	Not used	Not used
8	Not used	Not used
9	Not used	Not used
Case	Shield	-

Magnet track


Model	L1 (mm)	n	Approx. weight (Kg/m)
R88L-EC-GM-05126-A	126	2	11.2
R88L-EC-GM-05168-A	168	3	
R88L-EC-GM-05210-A	210	4	
R88L-EC-GM-05546-A	546	12	

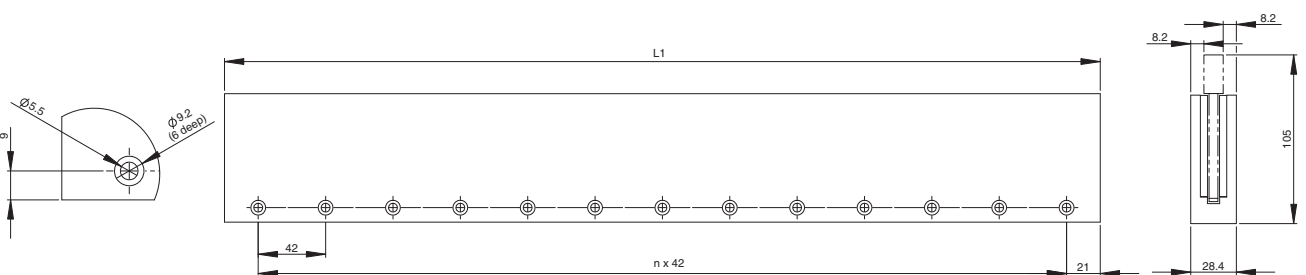


Ironless R88L-EC-GW-07□

Motor coil


Model	L1 (mm)	L2 (mm)	n
R88L-EC-GW-0703-□	151.4	134	3
R88L-EC-GW-0706-□	265.4	248	6
R88L-EC-GW-0709-□	379.4	362	9

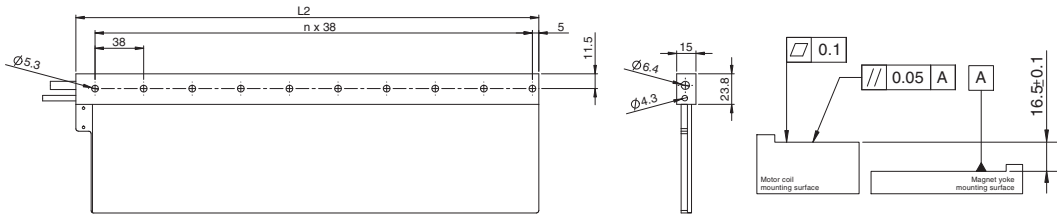


Motor with magnet track (separate order no.)

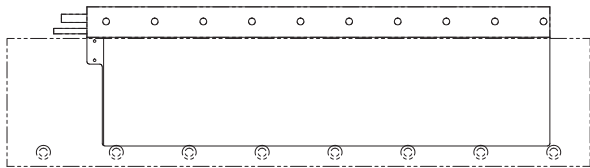

Motor with hall sensor (optional)

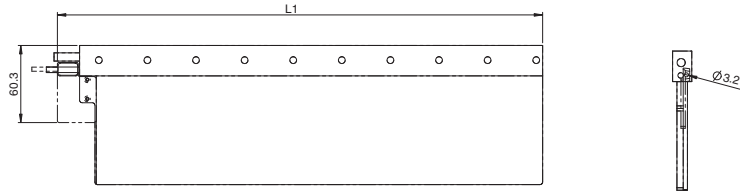


Wiring specifications for motor with connectors




Power connector		
Pin No.	Wire	Function
1	Black-1	Phase U
2	Black-2	Phase V
3	Black-3	Phase W
4	Not used	-
5	Not used	-
6	Green/Yellow	Ground

Mating connector:
Plug type: SPOC06KFSN169



Temperature sensor connector		
Pin No.	Wire	Function
1	Not used	-
2	Not used	-
3	Not used	-
4	Not used	-
5	Not used	-
6	White	PTC
7	Brown	PTC
8	Green	NTC
9	Yellow	NTC
Case	Shield	-


Units: mm



Hall sensor connector (optional)		
Pin No.	Wire	Function
1	Brown	5V
2	Grey	Hall U
3	Red	Hall V
4	Yellow	Hall W
5	White	GND
6	Not used	Not used
7	Not used	Not used
8	Not used	Not used
9	Not used	Not used
Case	Shield	-

Magnet track


Model	L1 (mm)	n	Approx. weight (Kg/m)
R88L-EC-GM-07114-A	114	1	25.5
R88L-EC-GM-07171-A	171	2	
R88L-EC-GM-07456-A	456	7	

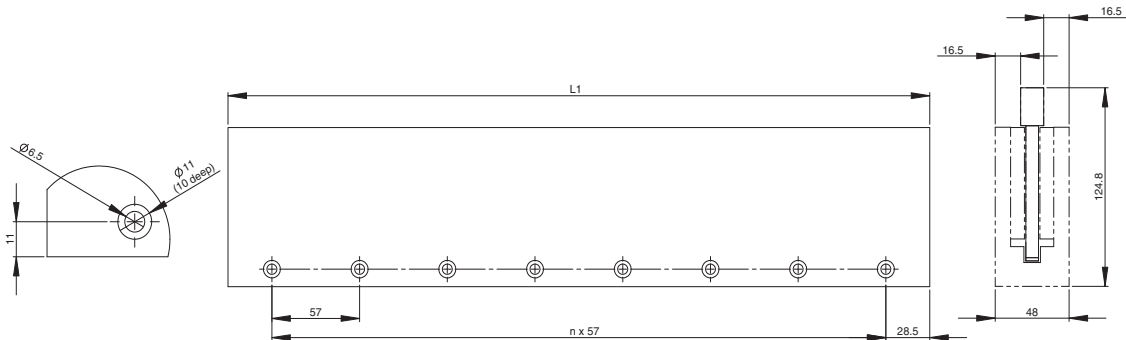


Optional serial Converter unit

Specifications

Serial converter model R88A-		SC01K-E	SC02K-E
Description		Serial converter from 1 Vpp to G5 serial data transmission and with hall sensor input	
Temperature sensor		KTY sensor detection of iron-core motor coil	NTC sensor detection of ironless motor coil
Electrical characteristics	Power supply voltage	5 VDC, max. 250 mA supplied by the drive	
	Standard resolution	Interpolation factor 100 plus quadrature count	
	Max. input frequency	400 kHz 1 Vpp	
	Analog input signals (cos, sin, Ref)	Differential input amplitude: 0.4 V to 1.2 V Input signal level: 1.5 V to 3.5 V	
	Output signals	Position data, hall & temperature sensor information, and alarms	
	Output method	Serial data transmission	
Mechanical characteristics	Transmission cycle	< 42 μ s	
	Vibration resistance	98 m/s ² max. (1 to 2500 Hz) in three directions	
	Shock resistance	980 m/s ² , (11 ms) two times in three directions	
Environmental conditions	Operating temperature	0 °C to 55 °C	
	Storage temperature	-20 °C to +80 °C	
	Humidity	20% to 90% relative humidity (without condensation)	

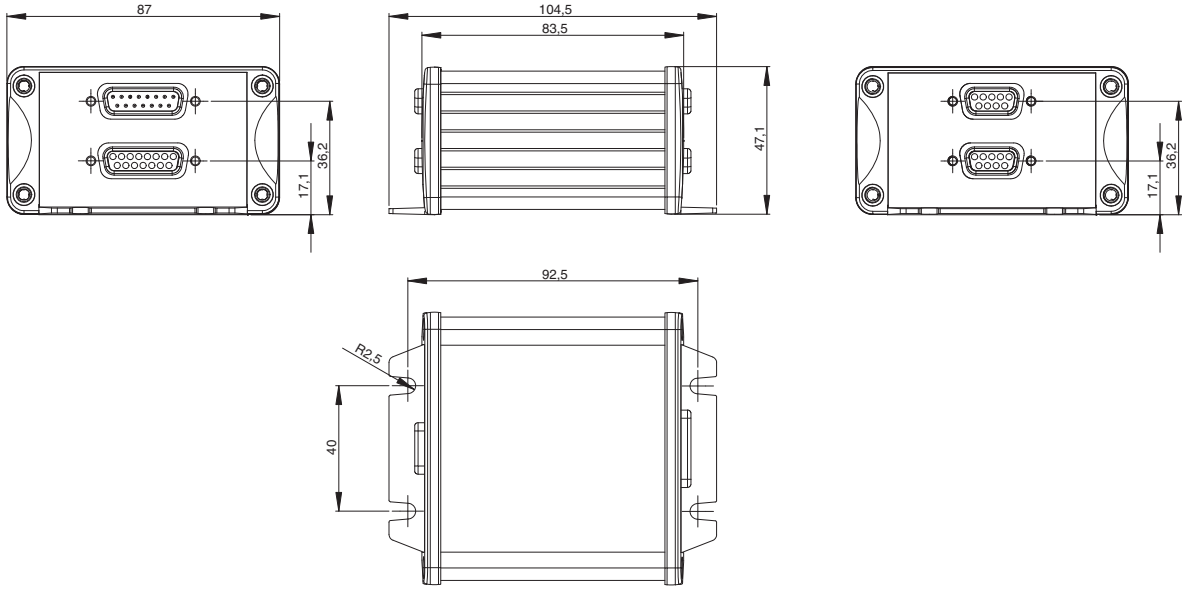

CN4
Serial data output to Linear Servo drive



Connector D-Sub 15-pin (male)

Pin No.	Signal
1	PS
2	/PS
3	Not used
4	Not used
5	Not used
6	Not used
7	Not used
8	5V
9	0V
10	Not used
11	Not used
12	Not used
13	Not used
14	Not used
15	Inner shield
Case	Shield


CN3
Temperature sensor interface without Hall sensor



Connector D-Sub 9-pin (female)

Pin No.	Signal
1	Not used
2	Not used
3	Not used
4	Not used
5	Not used
6	PTC
7	PTC
8	KTY/ NTC
9	KTY/NTC
Case	Shield

CN1
Encoder input 1Vpp with programmable lines NUMERIK JENA standard



Connector D-Sub 15-pin (female)

Pin No.	Signal
1	SDA*
2	SCL*
3	Not used
4	/Ref signal (U ₀ -)
5	/Cos signal (U ₂ -)
6	/Sin signal (U ₁ -)
7	Not used
8	5V
9	0V
10	Not used
11	Not used
12	Ref signal (U ₀)
13	Cos signal (U ₂)
14	Sin signal (U ₁)
15	Inner shield (IS)
Case	Shield

CN2
Hall & temperature sensors interface



Connector D-Sub 9-pin (female)


Pin No.	Signal
1	5V
2	Hall U
3	Hall V
4	Hall W
5	GND
6	PTC
7	PTC
8	KTY/NTC
9	KTY/NTC
Case	Shield

*Reserved. Please do not use

Note: As the 6,7,8,9 pins in the CN2 and CN3 connectors are internally wired, the Temperature sensor can be connected to both connectors. When the Hall sensor is also required, use the same cable for Hall & Temperature signals and the CN2 connector.

Ordering information

(Refer to servo drive chapter)

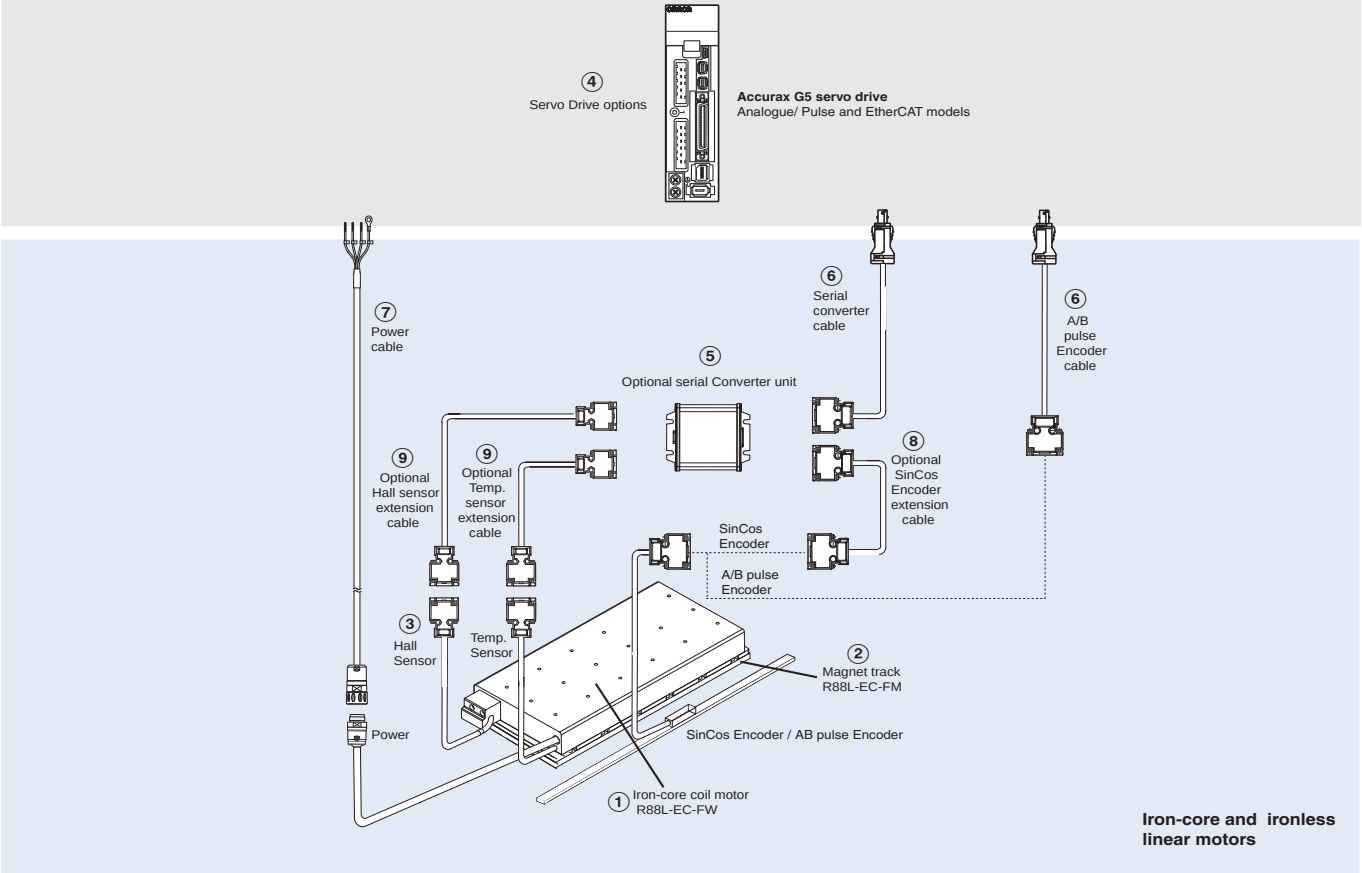

Note: The symbols ①②③... show the recommended sequence to select the linear motor, cables and serial converter for a linear motor system.

Linear motors

R88L-EC-FW-□ Iron-core type

230VAC single phase/three phase, 400VAC three phase

Linear motor parts							Linear Servo drive	
Symbol	Rated force	Peak force	①Iron-core motor coil		②Magnet track	③Hall Sensor	④Accurax G5 EtherCAT & Analog/pulse	
	48 N	105 N	Coil without connectors	R88L-EC-FW-0303-ANPC	R88L-EC-FM-03096-A	R88L-EC-FH-NNNN-A	R88D-K□02H-□□□-L	R88D-K□06F□□□-L
	96 N	210 N		R88L-EC-FW-0306-ANPC	R88L-EC-FM-03144-A R88L-EC-FM-03384-A		R88D-K□04H-□□□-L	R88D-K□10F□□□-L
	160 N	400 N		R88L-EC-FW-0606-ANPC	R88L-EC-FM-06192-A		R88D-K□08H-□□□-L	R88D-K□15F□□□-L
	240 N	600 N		R88L-EC-FW-0609-ANPC	R88L-EC-FM-06288-A		R88D-K□10H-□□□-L	R88D-K□20F□□□-L
	320 N	800 N		R88L-EC-FW-0612-ANPC	R88L-EC-FM-11192-A		R88D-K□15H-□□□-L	R88D-K□30F□□□-L
	608 N	1600 N		R88L-EC-FW-1112-ANPC	R88L-EC-FM-11288-A		R88D-K□15H-□□□-L	R88D-K□30F□□□-L
	760 N	2000 N		R88L-EC-FW-1115-ANPC	R88L-EC-FM-11288-A		R88D-K□15H-□□□-L	R88D-K□30F□□□-L
	48 N	105 N	Coil with connectors	R88L-EC-FW-0303-APLC	R88L-EC-FM-03096-A		R88D-K□02H-□□□-L	R88D-K□06F□□□-L
	96 N	210 N		R88L-EC-FW-0306-APLC	R88L-EC-FM-03144-A R88L-EC-FM-03384-A		R88D-K□04H-□□□-L	R88D-K□10F□□□-L
	160 N	400 N		R88L-EC-FW-0606-APLC	R88L-EC-FM-06192-A		R88D-K□08H-□□□-L	R88D-K□15F□□□-L
	240 N	600 N		R88L-EC-FW-0609-APLC	R88L-EC-FM-06288-A		R88D-K□10H-□□□-L	R88D-K□20F□□□-L
	320 N	800 N		R88L-EC-FW-0612-APLC	R88L-EC-FM-11192-A		R88D-K□15H-□□□-L	R88D-K□30F□□□-L
	608 N	1600 N		R88L-EC-FW-1112-APLC	R88L-EC-FM-11288-A		R88D-K□15H-□□□-L	R88D-K□30F□□□-L
	760 N	2000 N		R88L-EC-FW-1115-APLC	R88L-EC-FM-11288-A		R88D-K□15H-□□□-L	R88D-K□30F□□□-L

R88L-EC-GW-□ Ironless type

200VAC single phase/ three phase

Linear motor parts							Linear Servo drive	
							④Accurax G5	
Type	Rated force	Peak force	①Ironless motor coil		②Magnet track	③Hall Sensor	230V (EtherCAT)	230V (Analog/pulse)
①② ③④ 	26,5N	100 N	Coil without connectors	R88L-EC-GW-0303-ANPS	R88L-EC-GM-03090-A	R88L-EC-GH-03NN-A	R88D-KN02H-ECT-L	R88D-KT02H-L
	53 N	200 N		R88L-EC-GW-0306-ANPS	R88L-EC-GM-03120-A		R88D-KN08H-ECT-L	R88D-KT08H-L
	80 N	300 N		R88L-EC-GW-0309-ANPS	R88L-EC-GM-03390-A		R88D-KN10H-ECT-L	R88D-KT10H-L
	58 N	240 N		R88L-EC-GW-0503-ANPS	R88L-EC-GM-05126-A	R88L-EC-GH-05NN-A	R88D-KN02H-ECT-L	R88D-KT02H-L
	117 N	480 N		R88L-EC-GW-0506-ANPS	R88L-EC-GM-05546-A		R88D-KN04H-ECT-L	R88D-KT04H-L
	175 N	720 N		R88L-EC-GW-0509-ANPS	R88L-EC-GM-05168-A		R88D-KN08H-ECT-L	R88D-KT08H-L
	117 N	700 N		R88L-EC-GW-0703-ANPS	R88L-EC-GM-07114-A		R88D-KN04H-ECT-L	R88D-KT04H-L
	232 N	1400 N		R88L-EC-GW-0706-ANPS	R88L-EC-GM-07171-A	R88L-EC-GH-07NN-A	R88D-KN08H-ECT-L	R88D-KT08H-L
	348 N	2100 N		R88L-EC-GW-0709-ANPS	R88L-EC-GM-07456-A		R88D-KN10H-ECT-L	R88D-KT10H-L
	26,5N	100 N	Coil with connectors	R88L-EC-GW-0303-APLS	R88L-EC-GM-03090-A	R88L-EC-GH-03NN-A	R88D-KN02H-ECT-L	R88D-KT02H-L
	53 N	200 N		R88L-EC-GW-0306-APLS	R88L-EC-GM-03120-A		R88D-KN08H-ECT-L	R88D-KT08H-L
	80 N	300 N		R88L-EC-GW-0309-APLS	R88L-EC-GM-03390-A		R88D-KN10H-ECT-L	R88D-KT10H-L
	58 N	240 N		R88L-EC-GW-0503-APLS	R88L-EC-GM-05126-A	R88L-EC-GH-05NN-A	R88D-KN02H-ECT-L	R88D-KT02H-L
	117 N	480 N		R88L-EC-GW-0506-APLS	R88L-EC-GM-05546-A		R88D-KN04H-ECT-L	R88D-KT04H-L
	175 N	720 N		R88L-EC-GW-0509-APLS	R88L-EC-GM-05168-A		R88D-KN08H-ECT-L	R88D-KT08H-L
	117 N	700 N		R88L-EC-GW-0703-APLS	R88L-EC-GM-07114-A		R88D-KN04H-ECT-L	R88D-KT04H-L
	232 N	1400 N		R88L-EC-GW-0706-APLS	R88L-EC-GM-07171-A	R88L-EC-GH-07NN-A	R88D-KN08H-ECT-L	R88D-KT08H-L
	348 N	2100 N		R88L-EC-GW-0709-APLS	R88L-EC-GM-07456-A		R88D-KN10H-ECT-L	R88D-KT10H-L

Servo Drive


④ Refer to Accurax G5 Servo Drive chapter for detailed drive specifications and selection of drive accessories.

Serial Converter unit

Symbol	Specifications	Model
⑤	Serial converter unit from 1 Vpp to G5 serial data transmission (with KTY sensor detection of iron-core motor coil)	R88A-SC01K-E
	Serial converter unit from 1 Vpp to G5 serial data transmission (with NTC sensor detection of ironless motor coil)	R88A-SC02K-E


Note: If no temperature sensor is needed, then it does not matter which converter you use.

Serial Converter cable to Servo Drive


Symbol	Specifications	Model	Appearance
⑥	Accurax G5-Linear drive to Serial Converter cable. (Connectors R88A-CNK41L and DB-15)	1.5 m R88A-CRKN001-5CR-E 3 m R88A-CRKN003CR-E 5 m R88A-CRKN005CR-E 10 m R88A-CRKN010CR-E 15 m R88A-CRKN015CR-E 20 m R88A-CRKN020CR-E	

Note: This cable can be used also for A/B Pulse Encoder Numerik Jena standard pinout.


Power cable

Symbol	Specifications	Model	Appearance
⑦	For iron-core linear motors R88L-EC-FW-0303-□ R88L-EC-FW-0306-□	1.5 m R88A-CAWK001-5S-DE 3 m R88A-CAWK003S-DE 5 m R88A-CAWK005S-DE 10 m R88A-CAWK010S-DE 15 m R88A-CAWK015S-DE 20 m R88A-CAWK020S-DE	
	For iron-core linear motors R88L-EC-FW-0606-□ R88L-EC-FW-0609-□ R88L-EC-FW-0612-□ R88L-EC-FW-1112-□ R88L-EC-FW-1115-□	1.5 m R88A-CAWL001-5S-DE 3 m R88A-CAWL003S-DE 5 m R88A-CAWL005S-DE 10 m R88A-CAWL010S-DE 15 m R88A-CAWL015S-DE 20 m R88A-CAWL020S-DE	
	For ironless linear motors R88L-EC-GW-□	1.5 m R88A-CAWB001-5S-DE 3 m R88A-CAWB003S-DE 5 m R88A-CAWB005S-DE 10 m R88A-CAWB010S-DE 15 m R88A-CAWB015S-DE 20 m R88A-CAWB020S-DE	

Linear Encoder cable to Serial Converter

Symbol	Specifications	Model	Appearance
⑧	Extension cable for Numerik Jena Linear Encoder to R88A-SC0□K-E serial converter (Connector DB-15) (This extension cable is optional)	1.5 m R88A-CFKA001-5CR-E	
		3 m R88A-CFKA003CR-E	
		5 m R88A-CFKA005CR-E	
		10 m R88A-CFKA010CR-E	
		15 m R88A-CFKA015CR-E	
	Extension cable for Renishaw Linear Encoder to R88A-SC0□K-E serial converter (Connector DB-15) (This extension cable is optional)	1.5 m R88A-CFKC001-5CR-E	
		3 m R88A-CFKC003CR-E	
		5 m R88A-CFKC005CR-E	
		10 m R88A-CFKC010CR-E	
		15 m R88A-CFKC015CR-E	
	Extension cable for Heidenhain Linear Encoder to R88A-SC0□K-E serial converter (Connector DB-15) (This extension cable is optional)	1.5 m R88A-CFKD001-5CR-E	
		3 m R88A-CFKD003CR-E	
		5 m R88A-CFKD005CR-E	
		10 m R88A-CFKD010CR-E	
		15 m R88A-CFKD015CR-E	

Hall and Temperature sensors cable to Serial Converter

Symbol	Specifications	Model	Appearance
⑨	Extension cable from Hall and Temperature sensors to R88A-SC0□K-E serial converter. (Connector DB-9) (This extension cable is optional)	1.5 m R88A-CFKB001-5CR-E	
		3 m R88A-CFKB003CR-E	
		5 m R88A-CFKB005CR-E	
		10 m R88A-CFKB010CR-E	
		15 m R88A-CFKB015CR-E	

Connectors

Specification	Model
Accurax G5 servo drive encoder connector (for CN4)	R88A-CNK41L
Hypertac power cable connector IP67 for iron-core linear motors	LPRA-06B-FRBN170
Hypertac power cable connector IP67 for ironless linear motors	SPOC06KFSDN169

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.