

OMRON

Rapid response:  
50 ms



*DeviceNet*

High Resolution:  
0.01°C


**Advanced Digital Controller**  
Rapid Response & High Resolution

**E5□R Digital Controllers**

# Advanced Functions for Control


## High-speed Sampling at 50 ms

The E5□R features high-speed sampling at 50 ms per loop, making it ideal for ceramic heater, flowrate, and pressure control. A square root function for flowrate control is available.

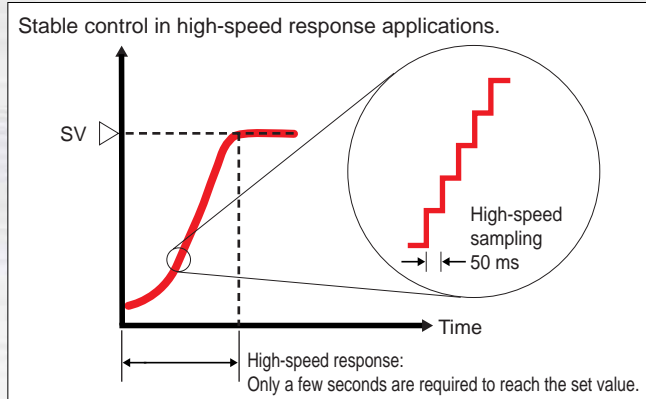

## Resolution of 0.01°C with Platinum Resistance Thermometers


Analog inputs have a high accuracy of  $\pm 0.1\%$ . The resolution when using platinum resistance thermometers is 0.01°C and is 1/43,000 for transfer and control outputs (between 4 and 20 mA). This allows measurements of temperature and humidity, fluctuation detection, and logging with environmental testing equipment to be performed at high resolution.

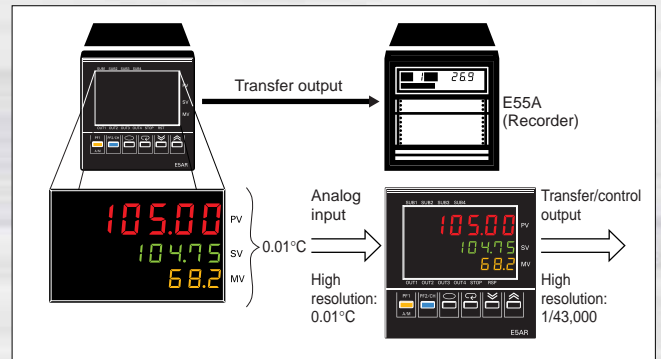

## 4 Loops in a Single Controller

The E5□R is available in 1-loop, 2-loop, and 4-loop analog input models. (See note.) The control mode can be selected from standard, heating/cooling, cascade, and proportional control with a single Controller using a software setting. (E5AR: 4 loops max.; E5ER: 2 loops max.) The ability to perform temperature, humidity, and pressure control for up to 4 loops contributes to cost reductions and panel downsizing.

Note: Models equipped with 4 analog inputs have dimensions of 96 x 96 mm (E5AR).

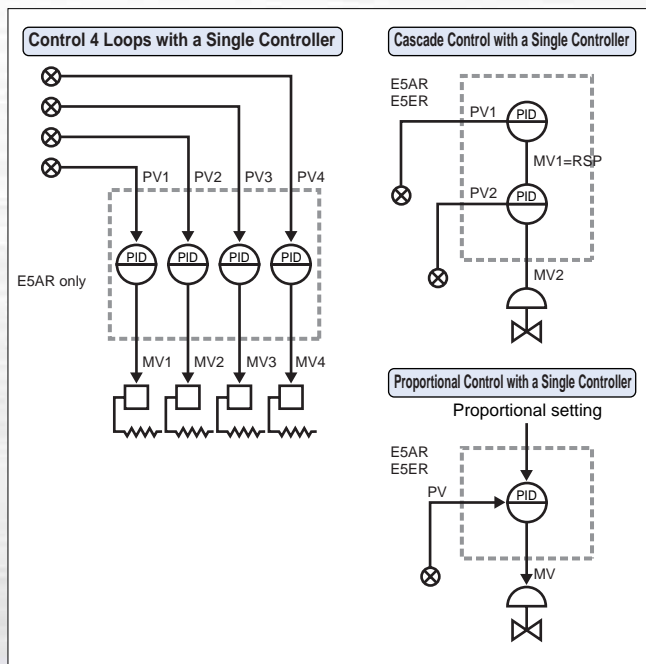

## A Variety of I/O to Control with PLCs

### Up to 6 Event Inputs

Event inputs allow the external control of bank selection (4 or 8), run/stop control, automatic/manual operation, the SV mode, and enabling/disabling writing via communications.

### Up to 2 Transfer Outputs


The PVs, SVs, MVs (manipulated variables), and SP ramp monitor values can be output to other devices.

### Up to 4 Auxiliary Outputs

Eleven types of alarms and input errors can be output to other devices.

### RS-485 Serial Communications

No programming is required to share PV and SV data with OMRON PLCs.

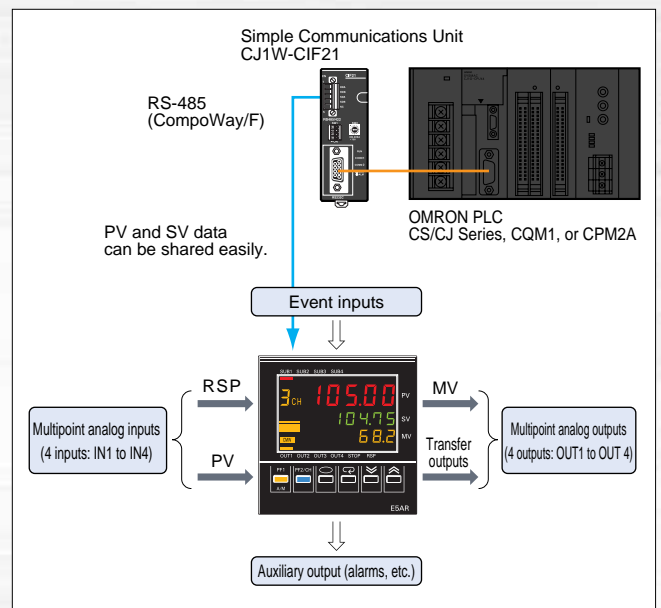

# E5□R

# Digital Controller for Control Applications Requiring Rapid Response and High Resolution.

The E5□R samples at 50 ms per loop for use with high-speed response equipment, such as ceramic heaters. Measurements, fluctuation detection, and logging for environmental testing equipment are performed at a high resolution of 0.01°C.

The R in E5□R represents the two areas where this Digital Controller excels - Rapid response and high Resolution.

Rapid response:

50 ms

High Resolution:

0.01°C



**E5ER**  
48 x 96 x 95mm  
(W x H x D)

**E5AR**  
96 x 96 x 95mm  
(W x H x D)

*Advanced & Sophisticated Digital Controller*



# Convenient Display Features, Visual Clarity, and Easy Operation

## LCD with 3 Lines of 5 Digits

In addition to the PV and SV, the MV (manipulated variable) is also displayed. You can watch the corresponding changes in the MV while making adjustments for PID control by changing the SV. An LCD is used for high visual clarity.



One-touch operation with user-allocated keys.

### Bank Number Display

The bank number (0 to 7) can be displayed instead of the MV. Up to 8 sets of settings, including SVs and PID constants, can be stored. You can switch between these settings using either event inputs or a front panel key.




Example of Bank Number Display

## Easy Setting with Thermo Tools Support Software

Initial settings can be performed easily from a computer (see note). In particular, when using more than one E5□R, downloading initial settings significantly reduces labor costs. You can mask unused parameters and settings can be exported as electronic documents (e.g., in CSV format) and printed if required.

Note: Only possible for Controllers with communications functions.

Easy Initial Setup

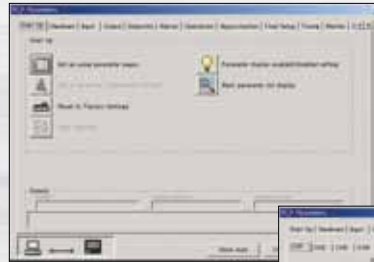

Select the E5□R from a list of OMRON components (e.g., Temperature Controllers, Digital Panel Meters, Timers, and Counters).



Make initial parameter settings from a computer screen.



### Parameter Mask Setting Window


Restrict parameter settings with the front panel keys with ON/OFF display settings.

Example: The display can be restricted only for the SV, alarm settings, and special parameters.



Data Logging

Serial communications RS-485

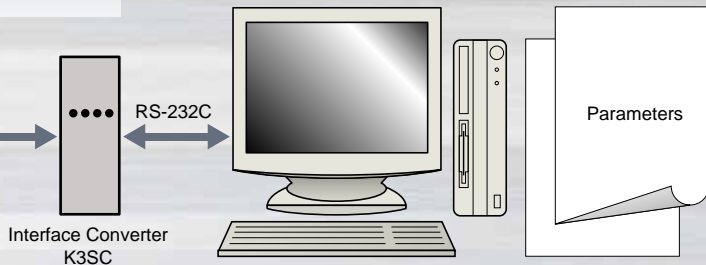

### Support Software for Easy Setting Thermo Tools (Sold Separately)

ESTT Support Software

*Digital Controllers That Deliver the R's*

# Solve Application Problems with the E5□R

## Rapid Response

### Problem

Temperature controllers for rapid response equipment, such as ceramic heaters are required.



### Solution

The E5□R improves control performance with high-speed sampling (50 ms).

50 ms

### Applications

- Bonding equipment
- Evaporation equipment
- Coil winding equipment

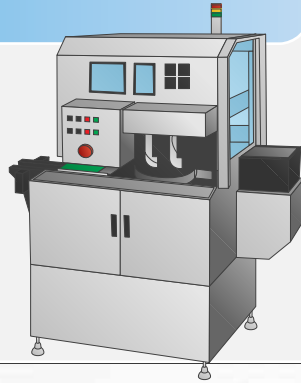

## High Resolution

### Problem

High-resolution temperature measurement/monitoring and fluctuation detection inside equipment are required.


### Solution

The input resolution of the E5□R is 0.01°C with a platinum resistance thermometer.

0.01°C

### Applications

- Semiconductor manufacturing equipment (exposure and air conditioning)
- Environmental testing equipment
- Vacuum furnaces
- Sterilization equipment
- Food processing equipment

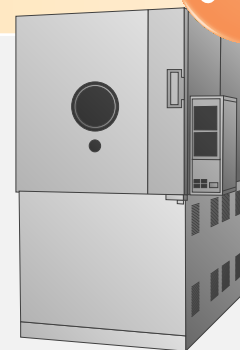

## Multi-loop

### Problem

In a process control system, single-loop controllers have to be changed to a simple instrumentation system.



### Solution

The E5□R supports 2- or 4-loop control, cascade control, or proportional control with a single controller.

Multi-loop

### Applications

- Sterilization equipment
- Food processing equipment

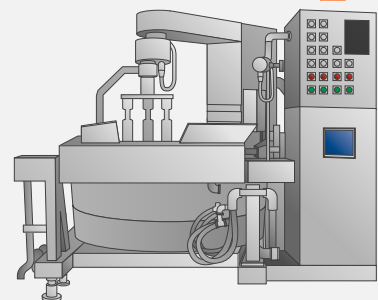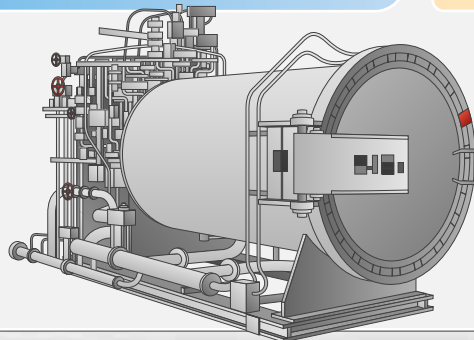


***- Rapid Response and High Resolution***

# Choose from 14 models with dimensions of 96 x 96 mm or 96 x 48 mm.

## E5□R Selection Guide

DeviceNet models are also available. (Refer to the E5□R datasheet (H122) for more information.)

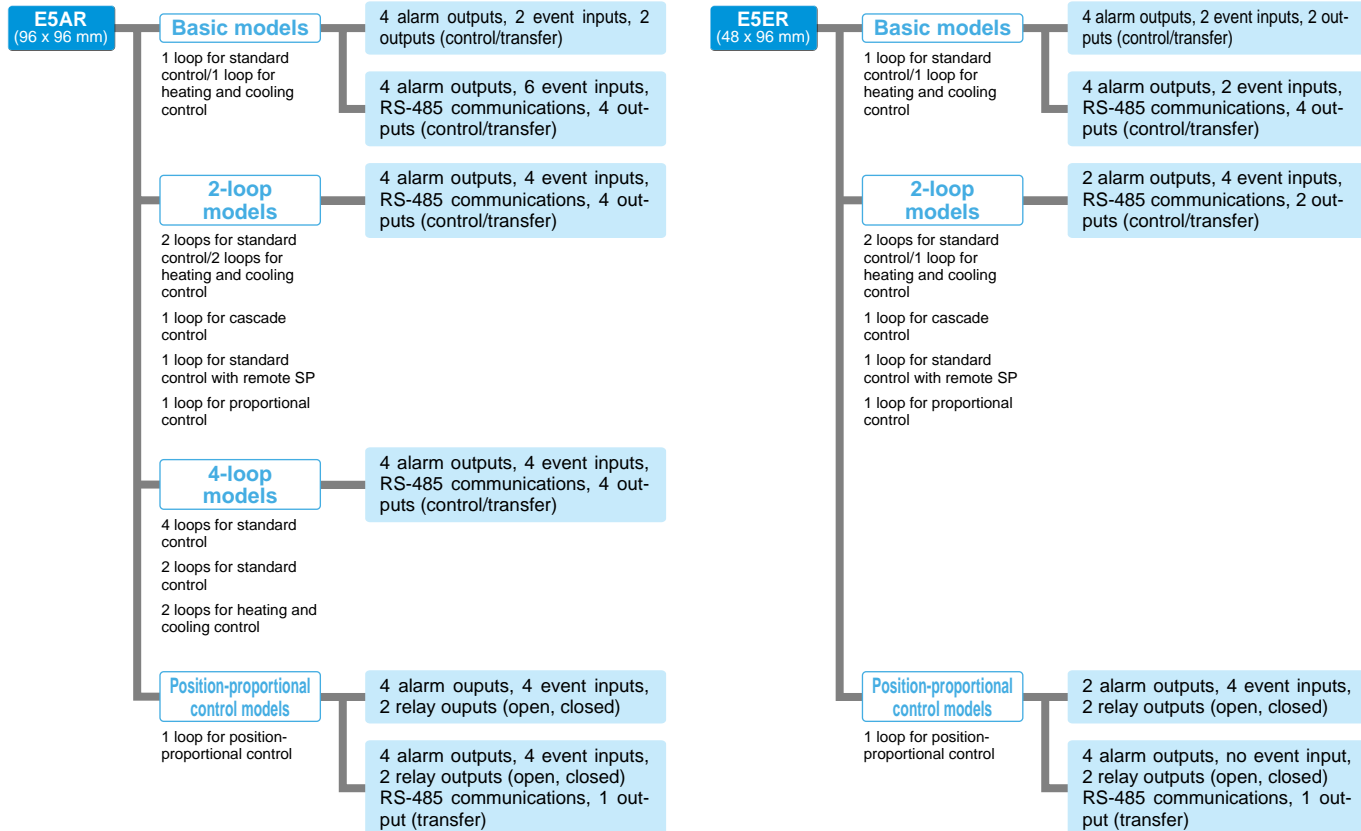

## Specifications

<b>Display</b>	7-segment LCD with backlight	Display colors: Red, green, and orange	Number of digits per display line: 5	Number of display lines: 3
<b>Supply voltage</b>	100 to 240 VAC, 24 VAC/VDC			
<b>Input (multiple)</b>	K, J, T, E, L, U, N, R, S, B, W, Pt100, 1 to 5 V, 0 to 5 V, 0 to 10 V, 4 to 20 mA, 0 to 20 mA			
<b>Outputs (multiple)</b>	Pulse voltage outputs: 12 VDC, PNP    Linear current outputs: 4 to 20 mA, 0 to 20 mA    Relay outputs: Position proportional			
<b>Indication accuracy</b>	Thermocouple: (±0.1% of PV or ±1°C, whichever is greater) ±1 digit max. Platinum resistance thermometer: (±0.1% of PV or ±0.5°C, whichever is greater) ±1 digit max. Current/voltage input: ±0.1% FS ±1 digit max.			
<b>Input resolution</b>	0.01°C (Pt100)			
<b>Sampling period</b>	50 ms per loop			
<b>Functions</b>	Control type : Standard, heating/cooling, position proportional Control method : ON/OFF, 2-PID Tuning : Autotuning Setting related : SV limits, parameter protection, 8 banks Control related : Input compensation, digital input filter, input scaling, forward/reverse operation, run/stop control, manual output, SP ramp, MV limit, MV rate-of-change limit, MV when stopped, MV for error, SV tracking, special control (cascade, proportional) Calculation related : Square root calculation, broken-line approximation Communications : RS-485 (CompoWay/F or MODBUS)			

Refer to the E5□R datasheet (H122) for more information.

## OMRON Corporation

**Industrial Automation Company**  
**Industrial Devices and Components Division H.Q.**  
**Measuring Components Department**  
 Shiokoji Horikawa, Shimogyo-ku,  
 Kyoto, 600-8530 Japan  
 Tel: (81)75-344-7080/Fax: (81)75-344-7189

### Regional Headquarters

**OMRON EUROPE B.V.**  
 Wegalaan 67-69, NL-2132 JD Hoofddorp  
 The Netherlands  
 Tel: (31)2356-81-300/Fax: (31)2356-81-388

**OMRON ELECTRONICS LLC**  
 1 East Commerce Drive, Schaumburg, IL 60173  
 U.S.A.  
 Tel: (1)847-843-7900/Fax: (1)847-843-8568

### OMRON ASIA PACIFIC PTE. LTD.

83 Clemenceau Avenue,  
 #11-01, UE Square,  
 239920 Singapore  
 Tel: (65)6835-3011/Fax: (65)6835-2711

**OMRON CHINA CO., LTD. BEIJING OFFICE**  
 Room 1028, Office Building,  
 Beijing Capital Times Square,  
 No. 88 West Chang'an Road,  
 Beijing, 100031 China  
 Tel: (86)10-8391-3005/Fax: (86)10-8391-3688

**Authorized Distributor:**