

## S8VK-S/S8FS-G

The choice is clear



It's not only the chameleon  
that has evolved to survive...

The choice is clear

# Power supplies to drive the new era

---

OMRON power supplies have evolved to keep pace with changes at manufacturing sites.

---

To survive in the rapidly changing market, manufacturing sites must also continually change.

OMRON looks at these changes as a global manufacturer and seller of control devices,  
and we use what we've learned from our own factory floor in our product development.

We continue to develop power supplies that meet the needs of the ever-changing manufacturing floor.

In order to maximize the added-value of equipment and control panels,  
we have created these two evolved power supplies.



\*Image: The chameleon has evolved over the years to be able to change its body color to protect it from enemies and to catch prey.  
This is the veiled chameleon, which lives in the Republic of Yemen. It grows to around 40 cm to 60 cm in length.

## For changes to the products manufactured

We make compact power supplies that save space to support our customers' increasingly sophisticated equipment.



Compact



Side-by-side mounting



Conforms to transformer standards

## For changes to the places of manufacturing

These power supplies can be used in tough environments, from cold regions to the tropics, and even at high altitudes.



Altitudes up to 3,000 m



Wide ambient operating temperature range



Life expectancy: 10 years\*1



CERTIFIED

## For changes to the people who manufacture

Wiring can be easily done by workers of varying skill levels.



Push-In Plus Terminal Block



Cover to prevent screw dropout



Cover to prevent foreign matter ingress

**Industry's smallest class\*2**

General-purpose Power Supply  
S8FS-G  
300 W

Actual size



**World's smallest\*2**

DIN rail-mounting Power Supply  
S8VK-S  
240 W

# Power supplies this small, only from OMRON

\*1. Life expectancy depends on certain conditions. Refer to the datasheet of each product for details.

\*2. According to OMRON investigation in November 2016.



# Selection is Easy.

For DIN  
rail-mounting



DIN rail-mounting Power Supply

## S8VK-S

Power rating/output voltage					Model selection
30 W	60 W	120 W	240 W	480 W	
●	●	●	●	●	→ P.10 <b>A</b>

## Saves Space, Allowing Control Panel Downsizing


### World's smallest\*<sup>1</sup>

The space required for the power supply is reduced, allowing the control panel to be downsized and components to be added inside the control panel.



### Side-by-side mounting\*<sup>3</sup>


Cooling space between power supplies is not necessary, reducing the installation area. This enables greater flexibility in control panel design.

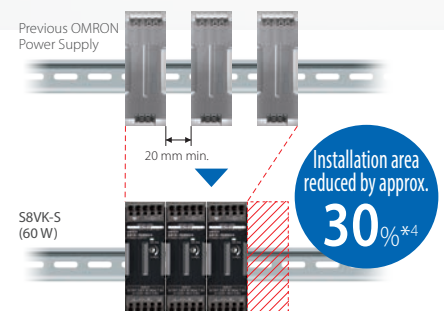

## Reduced Wiring Work

### Push-In Plus Terminal Block

It's as easy as inserting an earphone jack. Tools are not required for wiring, reducing the time and work.

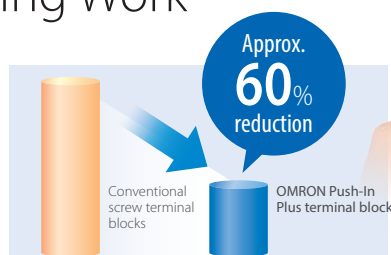

Note: Information for Push-In Plus and screw terminal blocks is based on OMRON's actual measurement value data.



\*1. According to OMRON investigation in November 2016.

\*2. Comparison to previous OMRON Power Supply.

\*3. Conditions apply to models and derating for side-by-side mounting.

\*4. Comparing mounting of three OMRON S8VK-G (60 W) units to side-by-side mounting of three S8VK-S (60 W) units.

# Which Type Will You Choose?



For installation  
in equipment



Compact

Conforms to transformer standards

Altitudes up to 3,000 m

Ambient operating temperature of -20°C to 70°C

Life expectancy: 10 years

Cover to prevent screw dropout

Cover to prevent foreign matter ingress

CERTIFIED

General-purpose Power Supply
 


## S8FS-G

Power rating/output voltage							Model selection	
	15 W	30 W	50 W	100 W	150 W	300 W	600 W	
48 V					●	●	●	With cover/ Direct-mounting type → P.12 <b>E</b>
24 V	●	●	●	●	●	●	●	
15 V	●	●	●	●	●	●	●	With cover/ Direct-mounting type (Connector type) → P.12 <b>F</b>
12 V	●	●	●	●	●	●	●	
5 V	●	●	●	●	●			With cover/ DIN rail-mounting type → P.12 <b>G</b>

## Prevents Trouble during Installation and Maintenance

### Cover to prevent screw dropout

The terminal block cover features a screw dropout prevention mechanism. Screws will not drop when connecting terminals, making work easier.

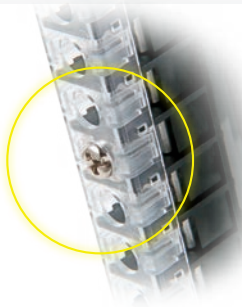

### Cover to prevent foreign matter ingress

The front cover guards against ingress of foreign matter. This prevents accidental insertion of tools and protects against electric shocks.



## Enables Stable Operation of Devices and Equipment over Long Periods of Time

### Features a 10-year life expectancy, including for the fan

These units have a 10-year life expectancy, including for the cooling fan, which in the past required maintenance and replacement.

# A Wide Variety of Models Support

## DIN Rail Mounting, Small Capacity Power Supply

These models are recommended for capacities of 15 W and 30 W.



### S8VK-G

	Power rating/output voltage					
	15 W	30 W	60 W	120 W	240 W	480 W
48 V					•	•
24 V	•	•	•	•	•	•
12 V	•	•	•			
5 V	•	•				

#### Model selection

→ P.10 **B**



Conforms to transformer standards



Ambient operating temperature of -40°C to 70°C



Life expectancy: 10 years



## DIN Rail Mounting, 3-Phase Input

These models are recommended for 3-phase 400 VAC input.



### S8VK-T

	Power rating/output voltage			
	120 W	240 W	480 W	960 W
24 V	•	•	•	•

#### Model selection

→ P.10 **C**



Conforms to transformer standards



Ambient operating temperature of -40°C to 70°C




Life expectancy: 10 years



# Various Applications and Requirements.

## Din Rail Mounting, Maintenance Forecast Monitor

Replacement time notifications are output and displayed, allowing the power supply to be used until the very end of its service life, reducing maintenance costs.

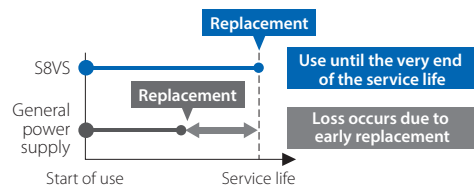

Replacement time can be seen at a glance



### S8VS-A

	Power rating/output voltage					
	60 W	90 W	120 W	180 W	240 W	480 W
24 V	●	●	●	●	●	●

Model selection

→ P.11 **D**



Ambient operating temperature of -10°C to 60°C

**10 YEARS**

Life expectancy: 10 years



## For Installation in Equipment, Low-voltage Detection Output

Unit and secondary load errors are detected and a signal is output.



### S8JX-P

	Power rating/output voltage	
	300 W	600 W
48 V	●	●
24 V	●	●
12 V	●	●
5 V	●	●

Model selection

Front-mounting type (with mounting bracket) → P.13 **H**

Front-mounting type (without mounting bracket) → P.13 **I**

DIN rail mounting type → P.13 **J**



Ambient operating temperature of -10°C to 70°C

**10 YEARS**

Life expectancy: 10 years (excluding fan)



# S8VK-S

DIN rail mounting Power Supply

## Function Comparison Table



# S8VK-G



I/O connections	Push-In Plus* <sup>1</sup>	Yes	—
	Screw (Rise-up)* <sup>1</sup>	—	Yes
	Screw	—	—
	Connector	—	—
Mounting	DIN rail mounting	Yes (Side-by-side mounting possible* <sup>2</sup> )	Yes
	Direct-mounting type (screw)	See note 3.	See note 3.
Input voltage (Voltage range)	Single phase AC	85 to 264	85 to 264
	3-phase AC	—	—
	DC* <sup>4</sup>	90 to 350	90 to 350
Built-in fan		No	No
Boost current* <sup>5</sup>		Yes	Yes
Additional functions	Low-voltage detection	Yes (Only 240 W, 480 W)	—
	Remote control	—	—
	Remote sensing	—	—
	Maintenance forecast monitor	—	—
	Voltage and current display	—	—
Coated PCB* <sup>6</sup>		Yes	Optional models
Parallel operation* <sup>7</sup>		Yes	Yes
Ambient operating temperature* <sup>8</sup>		-40°C to 70°C	-40°C to 70°C
Standards	UL 508	Listing	Listing
	CSA C22.2 No.107.1		
	ANSI/ISA 12.12.01	Listing	Listing
	CSA C22.2 No.213		
	UL 1310 Class 2 output* <sup>10</sup>	Yes	Yes
	UL 60950-1	Recognition (altitudes up to 3,000 m)	Recognition
	CSA C22.2 No.60950-1		
	EN 60950-1	Yes (altitudes up to 3,000 m)	Yes
	EN 50178	Yes (altitudes up to 3,000 m)	Yes
	Overvoltage Category III (EN 50178)	Yes	Yes
	IEC/EN 61558-2-16	Yes	Yes
	Harmonic current emissions IEC61000-3-2	Yes	Yes
	EMI (EN 61204-3, EN 55011)	Class B	Class B
Reliability	Marine Standards* <sup>12</sup>	LR DNV GL	LR
	SEMI* <sup>13</sup>	SEMI F47	SEMI F47
	Warranty Period* <sup>14</sup>	5 years	3 years
Model selection	Life expectancy* <sup>14</sup>	10 years	10 years
		P.10 A	P.10 B

\*1. Round terminals and forked terminals cannot be used. \*2. For side-by-side mounting, conditions apply. For details, refer to the S8VK-S Power Supplies datasheet. \*3. Separately sold brackets are required. \*4. For DC input, conditions apply for compliance with some safety standards and some models may not be standard certified. Refer to the datasheet of each product for details. \*5. Conditions apply to boost current output. Refer to the datasheet of each product for details. \*6. Chip part mounting surfaces are coated. \*7. Conditions apply to parallel operation. Refer to the datasheet of each product for details. \*8. The maximum ambient operating temperatures for standard mounting conditions are shown. Derating is required according to the temperature. Also, derating may vary depending upon mounting conditions and input voltage. Refer to the datasheet of each product for details.



## S8VK-T



120 W 240 W 480 W 960 W

## S8VS-A



60 W 90 W 120 W 180 W

240 W 480 W

—	—
Yes	—
—	Yes
—	—
Yes	Yes
See note 3.	See note 3.
340 to 576	85 to 264
320 to 576	—
450 to 810 (DC input cannot be used for 960 W.)	80 to 370 (DC input cannot be used for 480 W.)
No	No
Yes	—
—	Yes (excluding 60 W)
—	—
—	—
—	Yes
—	7-segment LED
Optional models	Optional models
Yes	—
-40°C to 70°C	-10°C to 60°C
Listing	Listing
Listing	—
—	Yes
Recognition	Recognition
Yes	Yes
Yes	Yes
Yes	Yes
Yes	—
Yes	Yes
Class B	Class A
LR	—
SEMI F47	SEMI F47
3 years	3 years
10 years	10 years

P.10 **C**

P.11 **D**

# S8FS-G

General-purpose Power Supply



15 W/30 W

50 W

100 W

150 W

300 W

600 W

## S8JX-P



300 W 600 W

—	—
—	—
Yes (Terminal block cover for preventing screw dropout)	Yes
Optional models	—
Yes	Yes
Yes	Yes
85 to 264	85 to 264
—	—
120 to 370 (300 W or less) 120 to 350 (600 W)	80 to 370
No (150 W or less) Yes (300 W, 600 W)	Yes
—	Yes
—	Yes
Optional models (600 W only)	Yes
—	Yes
—	—
—	—
Optional models	Optional models
Optional models (100 W or more, 24 V only)	Yes
-20°C to 70°C	-10°C to 70°C
Listing *9	Listing (24 V, 48 V) Recognition (5 V, 12 V)
—	—
—	—
Recognition (altitudes up to 3,000 m)	Recognition
Yes (altitudes up to 3,000 m)	Yes
Yes (altitudes up to 3,000 m)	Yes
Yes	Yes
Yes	—
Yes*11	Yes
Class B	Class B
—	—
SEMI F47	SEMI F47
3 years	5 years
10 years (including fan)	10 years (excluding fan)

P.12 **E F G**

P.13 **H I J**

\*9. Connector type is excluded. Also, optional models may be UL Recognition certified. For details, refer to the S8FS-G series Power Supplies Datasheet. \*10. Only products of less than 100 W are supported as per standard requirements. For applicable models, refer to the datasheet of each product. \*11. 150 W models have a limited load ratio. \*12. Conditions apply to support marine standards. For details, refer to the datasheet of each product. \*13. For 200 VAC input. \*14. Conditions apply to the warranty period and life expectancy. For details, refer to the datasheet of each product.

## S8VK-S/S8VK-G/S8VK-T

## S8VK-S

## List of Models

Place a check for the items you're interested in.

A	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Dimensions: W × H × D (mm)	Model
	30 W	100 to 240 VAC ( Allowable range: 85 to 264 VAC, 90 to 350 VDC* )	24 V	1.3 A	1.56 A	32 × 90 × 86	S8VK-S03024
	60 W			2.5 A	3 A	32 × 90 × 86	S8VK-S06024
	120 W			5 A	6 A	55 × 90 × 86	S8VK-S12024
	240 W			10 A	15 A	38 × 124 × 117.8	S8VK-S24024
	480 W			20 A	30 A	60 × 124 × 117.8	S8VK-S48024

## S8VK-G

## List of Models

Place a check for the items you're interested in.

B

Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Dimensions: W × H × D (mm)		Model
15 W	100 to 240 VAC  （ Allowable range: 85 to 264 VAC, 90 to 350 VDC* ）	5 V	3 A	3.6 A	22.5 × 90 × 86		S8VK-G01505
		12 V	1.2 A	1.44 A			S8VK-G01512
		24 V	0.65 A	0.78 A			S8VK-G01524
30 W		5 V	5 A	6 A	32 × 90 × 86		S8VK-G03005
		12 V	2.5 A	3 A			S8VK-G03012
		24 V	1.3 A	1.56 A			S8VK-G03024
60 W		12 V	4.5 A	5.4 A	32 × 90 × 106		S8VK-G06012
		24 V	2.5 A	3 A			S8VK-G06024
120 W		24 V	5 A	6 A	40 × 125 × 117.8		S8VK-G12024
240 W		24 V	10 A	12 A	60 × 125 × 145.6		S8VK-G24024
		48 V	5 A	6 A			S8VK-G24048
480 W		24 V	20 A	24 A	95 × 125 × 145.6		S8VK-G48024
	48 V	10 A	12 A			S8VK-G48048	

## S8VK-T

## List of Models

Place a check for the items you're interested in.

C	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Dimensions: W × H × D (mm)	Model
	120 W	2-phase 380 to 480 VAC ( Allowable range: 340 to 576 VAC )	24 V	5 A	6 A	40 × 125 × 117.8	S8VK-T12024
	240 W			10 A	12 A	60 × 125 × 145.6	S8VK-T24024
	480 W	3-phase 380 to 480 VAC ( Allowable range: 320 to 576 VAC )		20 A	24 A	95 × 125 × 145.6	S8VK-T48024
		450 to 600 VDC ( Allowable range: 450 to 810 VDC* )					
	960 W	2-phase 380 to 480 VAC ( Allowable range: 340 to 576 VAC )		32 A	—	135 × 125 × 175.6	S8VK-T96024
		3-phase 380 to 480 VAC ( Allowable range: 320 to 576 VAC )		40 A	48 A		

\*Refer to the datasheet of each product for information on which standards are applicable when DC input is used.

# S8VS-A

## List of Models

Place a check for the items you're interested in.

D


Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Alarm output*2	UL Class 2 output	Dimensions: W × H × D (mm)		Model (screw terminal block)
60 W	100 to 240 VAC  （ Allowable range: 85 to 264 VAC, 80 to 370 VDC*1 ）	24 V	2.5 A	—	—	Yes	40 × 95 × 103.3		S8VS-06024A
90 W			3.75 A		Sinking		50 × 115 × 116.2		S8VS-09024A
					Sinking	Yes			S8VS-09024AS
					Sourcing				S8VS-09024AP
					Sourcing	Yes			S8VS-09024APS
120 W			5 A		Sinking		75 × 115 × 120.3		S8VS-12024A
Sourcing						S8VS-12024AP			
180 W			7.5 A		Sinking		100 × 115 × 120.2		S8VS-18024A
					Sourcing				S8VS-18024AP
240 W			10 A		Sinking			S8VS-24024A	
	Sourcing				S8VS-24024AP				
480 W	100 to 240 VAC  （ Allowable range: 85 to 264 VAC ）		20 A	30 A (200 VAC)	Sinking/ Sourcing		150 × 115 × 122.2		S8VS-48024A

\*1. The range for compliance with EU Directives and safety standards (UL, EN, etc.) is 100 to 240 VAC (85 to 264 VAC).

\*2. In the Alarm output column, sinking indicates an emitter COM and sourcing indicates a collector COM.

### About dimensions shown

In the case of standard mounting, the width (W) and height (H) are given with the distance from the DIN rail serving as the depth (D).

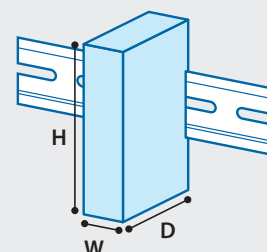

## S8FS-G

## List of Models

## ●With cover/Direct-mounting type

Place a check for the items you're interested in.

E	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Built-in fan	Dimensions: W × H × D (mm)		Model
	15 W	100 to 240 VAC <div><div></div><div>⎵</div><div>Allowable range: 85 to 264 VAC, 120 to 370 VDC*</div></div>	5 V	3 A	No	35 × 82 × 99		S8FS-G01505C
			12 V	1.3 A				S8FS-G01512C
			15 V	1 A				S8FS-G01515C
			24 V	0.65 A				S8FS-G01524C
	30 W		5 V	6 A				S8FS-G03005C
			12 V	3 A				S8FS-G03012C
			15 V	2.4 A				S8FS-G03015C
			24 V	1.5 A				S8FS-G03024C
	50 W		5 V	8 A		36 × 97 × 99	S8FS-G05005C	
			12 V	4.3 A			S8FS-G05012C	
			15 V	3.5 A			S8FS-G05015C	
			24 V	2.2 A			S8FS-G05024C	
	100 W		5 V	16 A		38 × 97 × 129	S8FS-G10005C	
			12 V	8.5 A			S8FS-G10012C	
			15 V	7 A			S8FS-G10015C	
			24 V	4.5 A			S8FS-G10024C	
	150 W		5 V	21 A		38 × 97 × 159	S8FS-G15005C	
			12 V	13 A			S8FS-G15012C	
			15 V	10 A			S8FS-G15015C	
			24 V	6.5 A			S8FS-G15024C	
	300 W		48 V	3.3 A		41 × 102 × 170	S8FS-G15048C	
			12 V	25 A			S8FS-G30012C	
			15 V	20 A			S8FS-G30015C	
24 V			14 A	S8FS-G30024C				
600 W	48 V	7 A	Yes	61 × 120 × 190	S8FS-G30048C			
	12 V	50 A			S8FS-G60012C			
	15 V	40 A			S8FS-G60015C			
	24 V	27 A			S8FS-G60024C			
	48 V	13 A		S8FS-G60048C				

Note 1. The Front-mounting Bracket is not included with the Power Supply. To mount a Power Supply from the front, purchase a DIN Rail-mounting Power Supply and a Front-mounting Bracket (sold separately).

## ●With cover/Direct-mounting type (Connector type)

Place a check for the items you're interested in.

F	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Built-in fan	Dimensions: W × H × D (mm)	Model
	15 W	100 to 240 VAC (Allowable range: 85 to 264 VAC, 120 to 370 VDC*)	24 V	0.65 A	No	35 × 82 × 99	S8FS-G01524CE
	30 W			1.5 A			S8FS-G03024CE
	50 W			2.2 A		36 × 97 × 99	S8FS-G05024CE
	100 W			4.5 A		38 × 97 × 129	S8FS-G10024CE
	150 W			6.5 A		38 × 97 × 159	S8FS-G15024CE

## ●With cover/DIN rail mounting type

Place a check for the items you're interested in.

G

	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Built-in fan	Dimensions: W × H × D (mm)	Model
	15 W	100 to 240 VAC ( Allowable range: ) ( 85 to 264 VAC, 120 to 370 VDC* )	5 V	3 A	No	36.2 × 82 × 117.7	S8FS-G01505CD
			12 V	1.3 A			S8FS-G01512CD
			15 V	1 A			S8FS-G01515CD
			24 V	0.65 A			S8FS-G01524CD
	30 W		5 V	6 A			S8FS-G03005CD
			12 V	3 A			S8FS-G03012CD
			15 V	2.4 A			S8FS-G03015CD
			24 V	1.5 A			S8FS-G03024CD
	50 W		5 V	8 A		37.2 × 97 × 117.7	S8FS-G05005CD
			12 V	4.3 A			S8FS-G05012CD
			15 V	3.5 A			S8FS-G05015CD
			24 V	2.2 A			S8FS-G05024CD
	100 W		5 V	16 A		39.2 × 97 × 147.7	S8FS-G10005CD
			12 V	8.5 A			S8FS-G10012CD
			15 V	7 A			S8FS-G10015CD
			24 V	4.5 A			S8FS-G10024CD
	150 W		5 V	21 A		39.2 × 97 × 177.7	S8FS-G15005CD
			12 V	13 A			S8FS-G15012CD
			15 V	10 A			S8FS-G15015CD
			24 V	6.5 A			S8FS-G15024CD
300 W	48 V	3.3 A	42.2 × 102 × 200.7	S8FS-G15048CD			
	12 V	25 A		S8FS-G30012CD			
	15 V	20 A		S8FS-G30015CD			
	24 V	14 A		S8FS-G30024CD			
600 W	48 V	7 A	Yes	62.2 × 120 × 220.7	S8FS-G30048CD		
	12 V	50 A			S8FS-G60012CD		
	15 V	40 A			S8FS-G60015CD		
	24 V	27 A			S8FS-G60024CD		
48 V	13 A	S8FS-G60048CD					



# S8JX-P

## List of Models

### ● Front-mounting type (with mounting bracket)

Place a check for the items you're interested in.

<div>H</div>	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Built-in fan	Dimensions: W × H × D (mm)		Model
	300 W	<div>100 to 240 VAC ( Allowable range: 85 to 264 VAC, 80 to 370 VDC* )</div>	5 V	60 A	—	Yes	77.6 × 124.3 × 217.3		S8JX-P30005C
			12 V	27 A	—				S8JX-P30012C
			24 V	14 A	16.5 A (200 VAC)				S8JX-P30024C
			48 V	7 A	—				S8JX-P30048C
	600 W		5 V	120 A	—		116.6 × 124.3 × 217.3		S8JX-P60005C
			12 V	53 A	—				S8JX-P60012C
			24 V	27 A	31 A (200 VAC)				S8JX-P60024C
			48 V	13 A	—				S8JX-P60048C

### ● Front-mounting type (without mounting bracket)

Place a check for the items you're interested in.

I	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Built-in fan	Dimensions: W × H × D (mm)		Model
	300 W	<div>100 to 240 VAC ( Allowable range: 85 to 264 VAC, 80 to 370 VDC* )</div>	5 V	60 A	—	Yes	71 × 92 × 165		S8JX-P30005N
			12 V	27 A	—				S8JX-P30012N
			24 V	14 A	16.5 A (200 VAC)				S8JX-P30024N
			48 V	7 A	—				S8JX-P30048N
	600 W		5 V	120 A	—		110 × 92 × 164.8		S8JX-P60005N
			12 V	53 A	—				S8JX-P60012N
			24 V	27 A	31 A (200 VAC)				S8JX-P60024N
			48 V	13 A	—				S8JX-P60048N

### ● DIN rail mounting type


Place a check for the items you're interested in.

J	Power rating	Rated input voltage	Rated output voltage (DC)	Rated output current	Maximum boost current	Built-in fan	Dimensions: W × H × D (mm)	Model
	300 W	<div>100 to 240 VAC ( Allowable range: 85 to 264 VAC, 80 to 370 VDC* )</div>	5 V	60 A	—	Yes	77.6 × 110.8 × 222.8	S8JX-P30005CD
			12 V	27 A	—			S8JX-P30012CD
			24 V	14 A	16.5 A (200 VAC)			S8JX-P30024CD
			48 V	7 A	—			S8JX-P30048CD
	600 W		5 V	120 A	—		116.6 × 110.8 × 222.8	S8JX-P60005CD
			12 V	53 A	—			S8JX-P60012CD
			24 V	27 A	31 A (200 VAC)			S8JX-P60024CD
			48 V	13 A	—			S8JX-P60048CD

\*The range for compliance with EU Directives and safety standards (UL, EN, etc.) is 100 to 240 VAC (85 to 264 VAC).

### About dimensions shown

In the case of standard mounting, the width (W) and height (H) are given with the distance from the DIN rail serving as the depth (D).

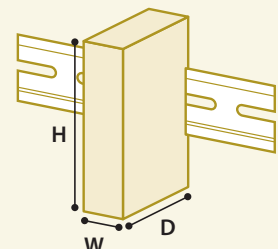

**OMRON Corporation    Industrial Automation Company**  
Kyoto, JAPAN

**Contact: [www.ia.omron.com](http://www.ia.omron.com)**

***Regional Headquarters***

**OMRON EUROPE B.V.**

Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31)2356-81-300/Fax: (31)2356-81-388

**OMRON ELECTRONICS LLC**

2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON ASIA PACIFIC PTE. LTD.**

No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON (CHINA) CO., LTD.**

Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**Authorized Distributor:**

© OMRON Corporation 2017 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

CSM\_1\_1\_0417  
**Cat. No. T209-E1-01**

0417(0417)